

Application Manual

RV-3032-C7

**DTCXO Temp. Compensated
Real-Time Clock Module
with I²C-Bus Interface**

TABLE OF CONTENTS

1. OVERVIEW	7
1.1. GENERAL DESCRIPTION.....	8
1.2. APPLICATIONS.....	8
1.3. ORDERING INFORMATION.....	8
2. BLOCK DIAGRAM.....	9
2.1. PINOUT.....	10
2.2. PIN DESCRIPTION.....	10
2.3. FUNCTIONAL DESCRIPTION.....	11
2.4. DEVICE PROTECTION DIAGRAM.....	12
3. REGISTER ORGANIZATION.....	13
3.1. REGISTER CONVENTIONS.....	13
3.2. REGISTER OVERVIEW.....	14
3.3. CLOCK REGISTERS.....	17
3.4. CALENDAR REGISTERS.....	18
3.5. ALARM REGISTERS.....	20
3.6. PERIODIC COUNTDOWN TIMER CONTROL REGISTERS.....	21
3.7. STATUS REGISTER.....	22
3.8. TEMPERATURE REGISTERS.....	23
3.9. CONTROL REGISTERS.....	25
3.10. TIME STAMP CONTROL REGISTER.....	28
3.11. CLOCK INTERRUPT MASK REGISTER.....	29
3.12. EVI CONTROL REGISTER.....	30
3.13. TEMPERATURE THRESHOLDS REGISTERS.....	31
3.14. TIME STAMP TLOW REGISTERS.....	32
3.15. TIME STAMP THIGH REGISTERS.....	35
3.16. TIME STAMP EVI REGISTERS.....	38
3.17. PASSWORD REGISTERS.....	42
3.18. EEPROM MEMORY CONTROL REGISTERS.....	43
3.19. RAM REGISTERS.....	44
3.20. CONFIGURATION EEPROM WITH RAM MIRROR REGISTERS.....	45
3.20.1. EEPROM PMU REGISTER.....	45
3.20.2. EEPROM OFFSET REGISTER.....	46
3.20.3. EEPROM CLKOUT REGISTERS.....	47
3.20.4. EEPROM TEMPERATURE REFERENCE REGISTERS.....	49
3.20.5. EEPROM PASSWORD REGISTERS.....	50
3.20.6. EEPROM PASSWORD ENABLE REGISTER.....	51
3.21. USER EEPROM.....	51
3.22. REGISTER RESET VALUES SUMMARY.....	52

4. DETAILED FUNCTIONAL DESCRIPTION	57
4.1. POWER ON RESET (POR).....	57
4.2. AUTOMATIC BACKUP SWITCHOVER FUNCTION.....	58
4.2.1. SWITCHOVER DISABLED	59
4.2.2. DIRECT SWITCHING MODE (DSM)	59
4.2.3. LEVEL SWITCHING MODE (LSM).....	60
4.3. TRICKLE CHARGER WITH CHARGE PUMP.....	61
4.4. PROGRAMMABLE CLOCK OUTPUT	61
4.4.1. XTAL CLKOUT FREQUENCY SELECTION.....	62
4.4.2. HF CLKOUT FREQUENCY SELECTION.....	62
4.4.3. CLKOUT FREQUENCY TRANSITIONS.....	63
4.4.4. NORMAL CLOCK OUTPUT	63
4.4.5. INTERRUPT CONTROLLED CLOCK OUTPUT.....	63
4.4.6. INTERRUPT DELAY AFTER CLKOUT ON.....	64
4.4.7. CLKOUT OFF DELAY AFTER I ² C STOP	64
4.4.8. CLOCK OUTPUT SCHEME.....	65
4.5. SETTING AND READING THE TIME	66
4.5.1. SETTING THE TIME	67
4.5.2. READING THE TIME	67
4.6. EEPROM READ/WRITE	68
4.6.1. POR REFRESH (ALL CONFIGURATION EEPROM → RAM).....	68
4.6.2. AUTOMATIC REFRESH (ALL CONFIGURATION EEPROM → RAM)	68
4.6.3. UPDATE (ALL CONFIGURATION RAM → EEPROM)	68
4.6.4. REFRESH (ALL CONFIGURATION EEPROM → RAM).....	68
4.6.5. WRITE TO ONE EEPROM BYTE (EEDATA (RAM) → EEPROM)	69
4.6.6. READ ONE EEPROM BYTE (EEPROM → EEDATA (RAM)).....	69
4.6.7. EEBUSY BIT	70
4.6.8. EEFLAG	71
4.6.9. EEPROM READ/WRITE CONDITIONS	71
4.6.10. USE OF THE CONFIGURATION REGISTERS	72
4.7. INTERRUPT OUTPUT	73
4.7.1. SERVICING INTERRUPTS	73
4.7.2. INTERRUPT SCHEME	74
4.8. PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION	77
4.8.1. PERIODIC COUNTDOWN TIMER DIAGRAM.....	77
4.8.2. USE OF THE PERIODIC COUNTDOWN TIMER INTERRUPT	78
4.8.3. FIRST PERIOD DURATION	80
4.9. PERIODIC TIME UPDATE INTERRUPT FUNCTION	81
4.9.1. PERIODIC TIME UPDATE DIAGRAM.....	81

4.9.2. USE OF THE PERIODIC TIME UPDATE INTERRUPT	82
4.10. ALARM INTERRUPT FUNCTION.....	83
4.10.1. ALARM DIAGRAM	83
4.10.2. USE OF THE ALARM INTERRUPT.....	84
4.11. EXTERNAL EVENT INTERRUPT FUNCTION.....	85
4.11.1. EXTERNAL EVENT DIAGRAM	86
4.11.2. USE OF THE EXTERNAL EVENT INTERRUPT	87
4.11.3. EDGE DETECTION (ET = 00)	88
4.11.4. LEVEL DETECTION WITH FILTERING (ET ≠ 00)	88
4.12. TEMPERATURE LOW INTERRUPT FUNCTION.....	89
4.12.1. TEMPERATURE LOW DIAGRAM	90
4.12.2. USE OF THE TEMPERATURE LOW INTERRUPT	91
4.13. TEMPERATURE HIGH INTERRUPT FUNCTION.....	92
4.13.1. TEMPERATURE HIGH DIAGRAM	93
4.13.2. USE OF THE TEMPERATURE HIGH INTERRUPT.....	94
4.14. AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION.....	95
4.14.1. AUTOMATIC BACKUP SWITCHOVER DIAGRAM.....	95
4.14.2. USE OF THE AUTOMATIC BACKUP SWITCHOVER INTERRUPT	96
4.15. POWER ON RESET INTERRUPT FUNCTION	97
4.15.1. POWER ON RESET DIAGRAM	97
4.15.2. USE OF THE POWER ON RESET INTERRUPT	98
4.16. VOLTAGE LOW INTERRUPT FUNCTION.....	99
4.16.1. VOLTAGE LOW DIAGRAM	99
4.16.2. USE OF THE VOLTAGE LOW INTERRUPT.....	100
4.17. TIME STAMP EVI FUNCTION	101
4.17.1. TIME STAMP EVI SCHEME	102
4.18. TIME STAMP TLOW FUNCTION	103
4.18.1. TIME STAMP TLOW SCHEME	104
4.19. TIME STAMP THIGH FUNCTION.....	105
4.19.1. TIME STAMP THIGH SCHEME.....	106
4.20. TEMPERATURE REFERENCE ADJUSTMENT	107
4.20.1. TREF VALUE DETERMINATION	107
4.21. TIME SYNCHRONIZATION	109
4.21.1. STOP BIT FUNCTION	109
4.21.2. WRITING TO SECONDS REGISTER	111
4.21.3. ESYN BIT FUNCTION	112
4.22. USER PROGRAMMABLE PASSWORD.....	114
4.22.1. ENABLE/DISABLE WRITE PROTECTION.....	114
4.22.2. CHANGING PASSWORD.....	115

4.22.3. FLOWCHART.....	116
5. TEMPERATURE COMPENSATION.....	117
5.1. XTAL MODE FREQUENCIES.....	117
5.2. COMPENSATION VALUES.....	117
5.3. AGING CORRECTION.....	118
5.3.1. OFFSET VALUE DETERMINATION	118
5.3.2. MEASURING TIME ACCURACY AT CLKOUT PIN	119
5.4. CLOCKING SCHEME.....	120
6. I²C INTERFACE.....	121
6.1. BIT TRANSFER.....	121
6.2. START AND STOP CONDITIONS.....	121
6.3. DATA VALID.....	122
6.4. SYSTEM CONFIGURATION.....	122
6.5. ACKNOWLEDGE.....	123
6.6. SLAVE ADDRESS.....	124
6.7. WRITE OPERATION.....	124
6.8. READ OPERATION AT SPECIFIC ADDRESS.....	125
6.9. READ OPERATION.....	125
6.10. I²C-BUS IN SWITCHOVER CONDITION.....	126
7. ELECTRICAL SPECIFICATIONS.....	127
7.1. ABSOLUTE MAXIMUM RATINGS.....	127
7.2. OPERATING PARAMETERS.....	128
7.2.1. TEMPERATURE COMPENSATION AND CURRENT CONSUMPTION	130
7.2.2. TYPICAL CHARACTERISTICS	131
7.3. XTAL OSCILLATOR PARAMETERS.....	132
7.3.1. TIME ACCURACY VS. TEMPERATURE CHARACTERISTICS	133
7.3.2. TIME ACCURACY 1 HZ EXAMPLES	134
7.3.3. TEMPERATURE SENSOR ACCURACY EXAMPLE	135
7.4. POWER ON AC ELECTRICAL CHARACTERISTICS.....	136
7.5. BACKUP AND RECOVERY AC ELECTRICAL CHARACTERISTICS.....	138
7.6. I²C-BUS CHARACTERISTICS.....	139
8. TYPICAL APPLICATION CIRCUITS.....	140
8.1. NO BACKUP SOURCE / EVENT INPUT NOT USED.....	140
8.2. NON-RECHARGEABLE BACKUP SOURCE / EVENT INPUT USED (ACTIVE HIGH).....	141
8.3. RECHARGEABLE BACKUP SOURCE / EVENT INPUT USED (ACTIVE LOW).....	142
8.4. CERACHARGE™ BACKUP BATTERY / EVENT INPUT NOT USED.....	143
8.5. NO BACKUP SOURCE / EVENT INPUT USED (“WAKE-UP” & “POWER SWITCH”).....	144
9. PACKAGE.....	145
9.1. DIMENSIONS AND SOLDER PAD LAYOUT.....	145

9.1.1. RECOMMENDED THERMAL RELIEF	145
9.2. MARKING AND PIN #1 INDEX.....	146
10. MATERIAL COMPOSITION DECLARATION & ENVIRONMENTAL INFORMATION	147
10.1. HOMOGENOUS MATERIAL COMPOSITION DECLARATION	147
10.2. MATERIAL ANALYSIS & TEST RESULTS	148
10.3. RECYCLING MATERIAL INFORMATION	149
10.4. ENVIRONMENTAL PROPERTIES & ABSOLUTE MAXIMUM RATINGS	150
11. SOLDERING INFORMATION.....	151
12. HANDLING PRECAUTIONS FOR MODULES WITH EMBEDDED CRYSTALS	152
13. PACKING & SHIPPING INFORMATION.....	153
14. COMPLIANCE INFORMATION	154
15. DOCUMENT REVISION HISTORY.....	154

RV-3032-C7

DTCXO Temp. Compensated Real-Time Clock (RTC) Module with I²C-Bus Interface

1. OVERVIEW

- RTC module with built-in 32.768 kHz “Tuning Fork” crystal oscillator and HF oscillator
- Counters for hundredths of seconds, seconds, minutes, hours, weekday, date, month and year
 - Automatic leap year correction: 2000 to 2099
- Factory calibrated temperature compensation
- Very High Time Accuracy
 - ± 2.5 ppm from -40 to +85°C
 - ± 20 ppm from +85 to +105°C
 - Aging compensation with Offset value
- Interrupt functions (1)
 - Periodic Countdown Timer
 - Periodic Time Update (seconds, minutes)
 - Alarm for date, hours and minutes settings
 - External Event with Time Stamp
 - Temperature Low with Time Stamp
 - Temperature High with Time Stamp
 - Automatic Backup Switchover
 - Power On Reset (POR)
 - Voltage Low Detection: typical 1.2 V (sampling 1 Hz)
- 16 Bytes of User RAM and 32 Bytes of User EEPROM
- Configuration registers stored in EEPROM and mirrored in RAM
- User programmable password for write protection
- I²C-bus interface (up to 400 kHz)
 - 7-bit slave address = 1010001b (51h): read A3h, write A2h
- Programmable Clock Output for peripheral devices
 - XTAL mode: 32.768 kHz, 1024 Hz, 64 Hz, 1 Hz
 - HF mode: 8192 Hz to 67.109 MHz in 8192 Hz steps
 - Synchronized CLKOUT enable/disable and oscillator change
 - Selectable enable via Interrupt functions
 - Selectable $\overline{\text{INT}}$ delay for MCU wake up
 - Selectable CLKOUT-OFF delay for MCU sleep mode command
- Digital Thermometer (sampling 1 Hz)
 - $\pm 3^\circ\text{C}$ from -40 to +85°C
 - $\pm 7^\circ\text{C}$ from +85 to +105°C
 - Readable and adjustable 12-bit temperature sensor: resolution 0.0625°C/step
- Trickle Charger with Charge Pump for $V_{\text{BACKUP}} \geq V_{\text{DD}}$ and 1.75 V for TDK's CeraCharge™
- Wide Timekeeping voltage range: 1.3 to 5.5 V (including temperature sensing and compensation)
- Wide interface operating voltage: 1.4 to 5.5 V
- Very low current consumption: 160 nA ($V_{\text{DD}} = 3.0$ V, $T_{\text{A}} = 25^\circ\text{C}$)
- Operating temperature range: -40 to +85°C
(supports extended range from +85°C to +105°C with limitations)
- Ultra small and compact C7 package size (3.2 x 1.5 x 0.8 mm), RoHS-compliant and 100% lead-free
- Automotive qualification according to AEC-Q200 available

(1) The interrupt output pin $\overline{\text{INT}}$ also works in VBACKUP Power state (except for the External Event function which is disabled).

1.1. GENERAL DESCRIPTION

The RV-3032-C7 is a highly accurate real-time clock/calendar module due to its built-in Thermometer and Digital Temperature Compensation circuitry (DTCXO). The Temperature Compensation circuitry is factory calibrated and results in highest time accuracy of ± 2.5 ppm across the temperature range from -40 to $+85^{\circ}\text{C}$ and a time accuracy of ± 20 ppm for the extended range from $+85^{\circ}\text{C}$ to $+105^{\circ}\text{C}$, and additionally offers a non-volatile aging offset correction. The RV-3032-C7 has the smallest package and the lowest current consumption among all temperature compensated RTC modules. Due to its special architecture the RV-3032-C7 provides a very low current consumption of 160 nA.

The RV-3032-C7 CMOS real-time clock/calendar module includes automatic backup switching circuitry, a trickle charger with charge pump, and offers full RTC functionality with programmable counters, alarm, selectable interrupt, and clock output capabilities for frequencies from 1 Hz to 67 MHz. The internal EEPROM memory hosts all configuration settings and allows for additional user memory. Addresses and data are transmitted via an I²C-bus interface for communication with a host controller. The Address Pointer is incremented automatically after each written or read data byte.

1.2. APPLICATIONS

The RV-3032-C7 RTC module combines key functions with outstanding performance in an ultra-small ceramic package:

- Factory calibrated Temperature Compensation with temperature measuring every second
- Ultra-Low Power consumption
- Smallest RTC module (embedded XTAL) in an ultra-small 3.2 x 1.5 x 0.8 mm lead-free ceramic package

These unique features make this product perfectly suitable for many applications:

- Communication: IoT / Wearables / Wireless Sensors and Tags / Handsets
- Automotive: M2M / Navigation & Tracking Systems / Dashboard / Tachometers / Engine Controller
Car Audio & Entertainment Systems
- Metering: E-Meter / Heating Counter / Smart Meters / PV Converter / Utility metering
- Outdoor: ATM & POS systems / Surveillance & Safety systems / Ticketing Systems
- Medical: Glucose Meter / Health Monitoring Systems
- Safety: Security & Camera Systems / Door Lock & Access Control / Tamper Detection
- Consumer: Gambling Machines / TV & Set Top Boxes / White Goods
- Automation: PLC / Data Logger / Home & Factory Automation / Industrial and Consumer Electronics

1.3. ORDERING INFORMATION


Example: RV-3032-C7 TA QC

Code	Operating temperature range
TA (Standard)	-40 to $+85^{\circ}\text{C}$ 1)

1) Supports extended range from $+85^{\circ}\text{C}$ to $+105^{\circ}\text{C}$ with limitations.

Code	Qualification
QC (Standard)	Commercial Grade
QA	Automotive Grade AEC-Q200

2. BLOCK DIAGRAM

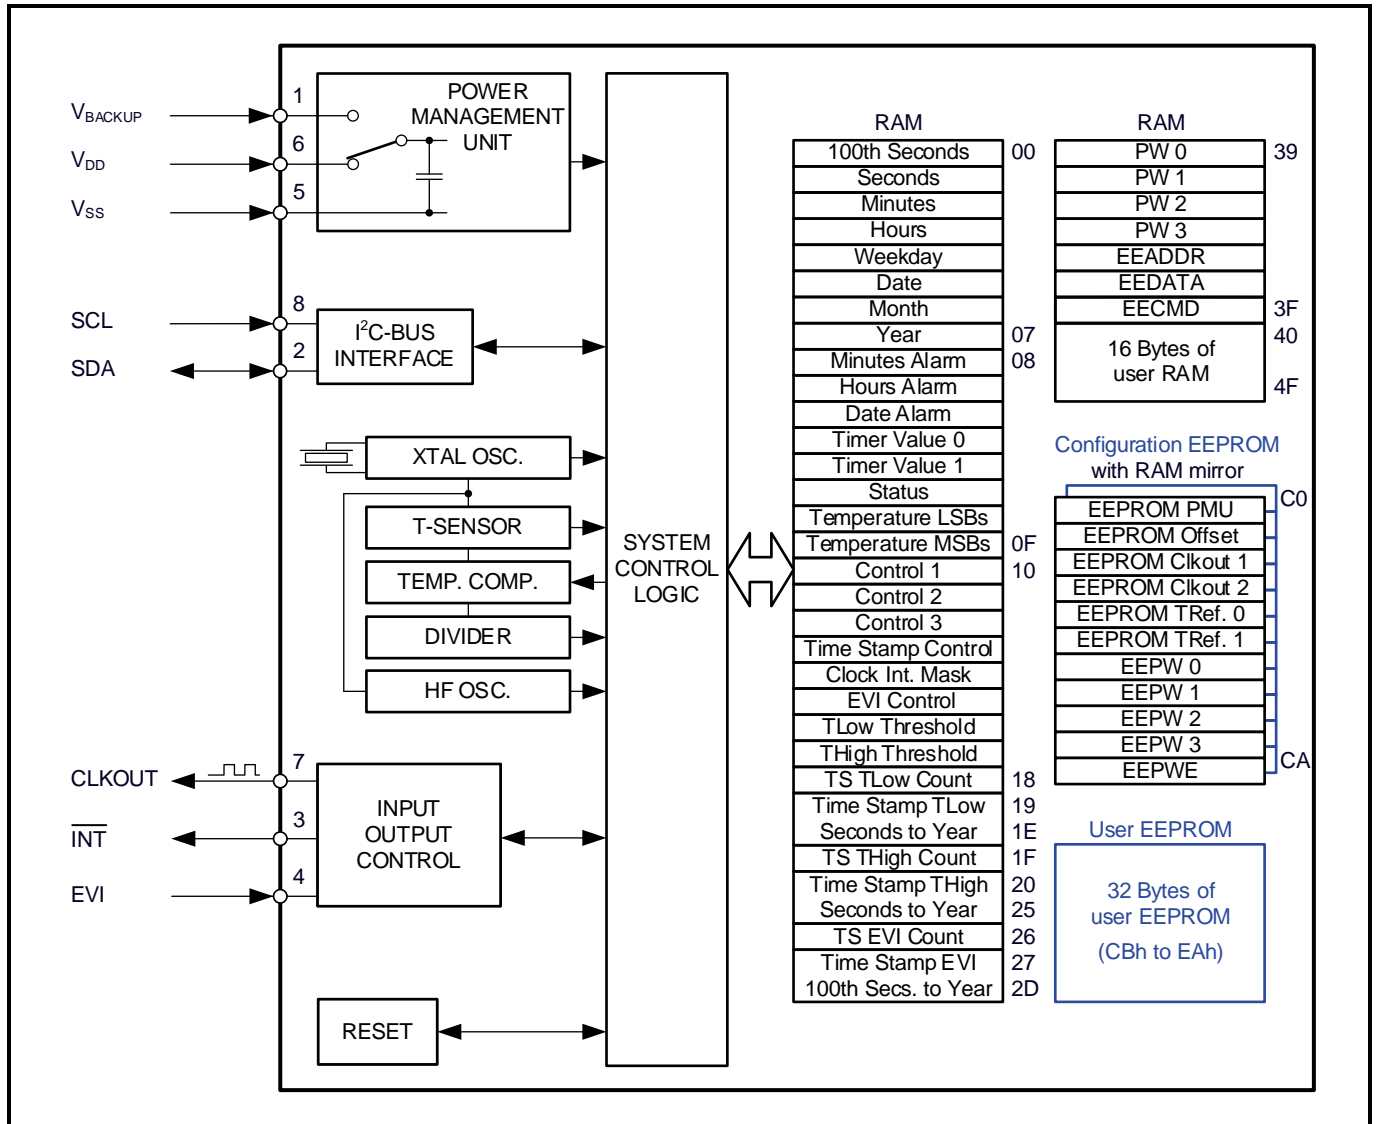

2.1. PINOUT

RV-3032-C7 Package: (top view)

#1	V _{BACKUP}
#2	SDA
#3	$\overline{\text{INT}}$
#4	EVI
#5	V _{SS}
#6	V _{DD}
#7	CLKOUT
#8	SCL

2.2. PIN DESCRIPTION

Symbol	Pin #	Description
V _{BACKUP}	1	Backup Supply Voltage. When the backup switchover function is not needed, V _{BACKUP} must be tied to V _{SS} with a 10 kΩ resistor.
SDA	2	I ² C Serial Data Input-Output; open-drain; requires pull-up resistor. In VBACKUP Power state, the SDA pin is disabled (high impedance).
$\overline{\text{INT}}$	3	Interrupt Output; open-drain; active LOW; requires pull-up resistor; used to output Periodic Countdown Timer, Periodic Time Update, Alarm, Temperature Low, Temperature High, External Event, Voltage Low, Automatic Backup Switchover and Power On Reset Interrupt signals. Interrupt output also works in VBACKUP Power state (except for the External Event function which is disabled).
EVI	4	External Event Input; used for interrupt generation, interrupt driven clock output and time stamp function. In VBACKUP Power state, the External Event function is disabled. This pin must not be left floating. Do not tie this pin to V _{BACKUP} (ESD diode between EVI and V _{DD}).
V _{SS}	5	Ground.
V _{DD}	6	Power Supply Voltage.
CLKOUT	7	<p>Clock Output; push-pull; Normal and Interrupt driven clock output can be activated concurrently.</p> <ol style="list-style-type: none"> Normal clock output is controlled by the NCLKE bit (EEPROM C0h). When NCLKE is set to 0 (default), the square wave output is enabled on the CLKOUT pin. When NCLKE bit is set to 1, the CLKOUT pin is LOW, if not enabled by the interrupt driven clock output (CLKF = 0). Interrupt driven clock output is controlled by an interrupt event. When CLKIE bit (address 11h) is set to 1 the occurrence of the interrupt selected in the Clock Interrupt Mask Register (address 14h) allows the square wave output on the CLKOUT pin (for waking up the MCU). Writing 0 to CLKIE will disable new interrupts from driving square wave on CLKOUT. When CLKF flag is cleared, the CLKOUT pin is LOW. <ul style="list-style-type: none"> An Interrupt Delay after CLKOUT on can be enabled with bit INTDE (address 14h) (for waking up the MCU). A CLKOUT switch off delay after I²C STOP can be selected and enabled by bits CLKD and CLKDE (registers 14h and 15h) (if the MCU wants to put itself into sleep mode). <p>When OS bit is set to 0 (EEPROM C3h) and depending of the settings in the FD field (EEPROM C3h) the CLKOUT pin can drive the square wave of 32.768 kHz, 1024 Hz, 64 Hz or 1 Hz. When OS bit is set to 1 (EEPROM C3h) and depending of the settings in the HFD field (EEPROM C2h and C3h) the CLKOUT pin can drive the square wave of a frequency between 8192 Hz to 67.109 MHz in 8192 Hz steps.</p> <p>In VBACKUP Power state, the CLKOUT pin is LOW.</p> <p>If this pin is not used it can be left floating; do not connect to a Supply Voltage or GND, as this is a digital push-pull output.</p>
SCL	8	I ² C Serial Clock Input; requires pull-up resistor. In VBACKUP Power state, the SCL pin is disabled.

2.3. FUNCTIONAL DESCRIPTION

The RV-3032-C7 is a high accurate, ultra-low power CMOS based Real-Time-Clock Module that include a 32.768 kHz Crystal and an HF oscillator. The Xtal 32.768 kHz clock itself and the frequencies from the HF oscillator are not temperature compensated. The very high Time Accuracy and stability of ± 2.5 ppm over the temperature range from -40°C to $+85^{\circ}\text{C}$ and of ± 20 ppm for the extended range from $+85^{\circ}\text{C}$ to $+105^{\circ}\text{C}$ is achieved by the built-in Digital Temperature Compensation circuitry (DTCXO). The factory calibrated correction values are located in the EEPROM and are not accessible for the user. Additionally, there is an EEPROM Offset Register customer use for aging correction.


The RV-3032-C7 includes an Automatic Backup switchover function and a Trickle Charger with Charge Pump. The interrupt output pin $\overline{\text{INT}}$ is also working in VBACKUP Power state (except for the External Event function which is disabled). The clock output on CLKOUT pin can be enabled normally via command over I²C interface or can be interrupt driven. The configuration registers are stored permanently in EEPROM and mirrored in RAM in order that the RTC module is still configured correctly even after power down. For safety against inadvertent overwriting, the time, control and configuration registers can be protected by a User Programmable Password.


The RV-3032-C7 provides standard Clock & Calendar function including 100th seconds, seconds, minutes, hours (24 hour mode), weekday, date, month, year (with leap year correction) and interrupt functions for the Periodic Countdown Timer, Periodic Time Update, Alarm, Temperature Low, Temperature High, External Event, Voltage Low, Automatic Backup Switchover and Power On Reset Interrupt signals. All registers are accessible via I²C-bus (2-wire Interface).

Beside the standard RTC functions, it contains an integrated 12-bit Temperature Sensor with a readable Temperature Value in $^{\circ}\text{C}$ with a resolution of $0.0625^{\circ}\text{C}/\text{step}$ and an adjustable Temperature Reference value. It also includes Time Stamp functions for the External Event, Temperature Low, and Temperature High Interrupt functions. The Interrupt and Time Stamp functions are also working in VBACKUP Power state (except for the External Event function which is disabled). The module also provides 16 Bytes of User RAM and 32 Bytes of User Memory EEPROM. Another RAM Byte can be used as User RAM when the Alarm function is not needed (Minutes Alarm, register 08h), another Byte if the Periodic Countdown Timer is not used (Timer Value 0, register 0Bh) and 2 further Bytes when the Temperature Thresholds are not needed (Thresholds TLT and THT, registers 16h and 17h).

The RAM registers are accessed by selecting a register address and then performing read or write operations. Multiple reads or writes may be executed in a single access, with the address automatically incrementing after each byte. When address is automatically incremented, wrap around occurs from address FFh to address 00h (see figure below). All registers are designed as addressable 8-bit registers despite the fact that not all registers and bits are implemented.

Handling RAM address registers:

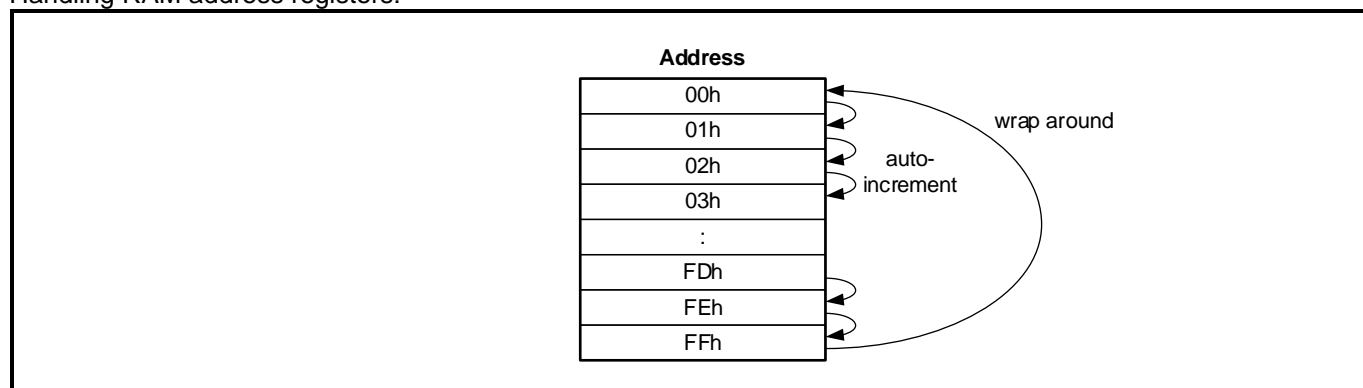

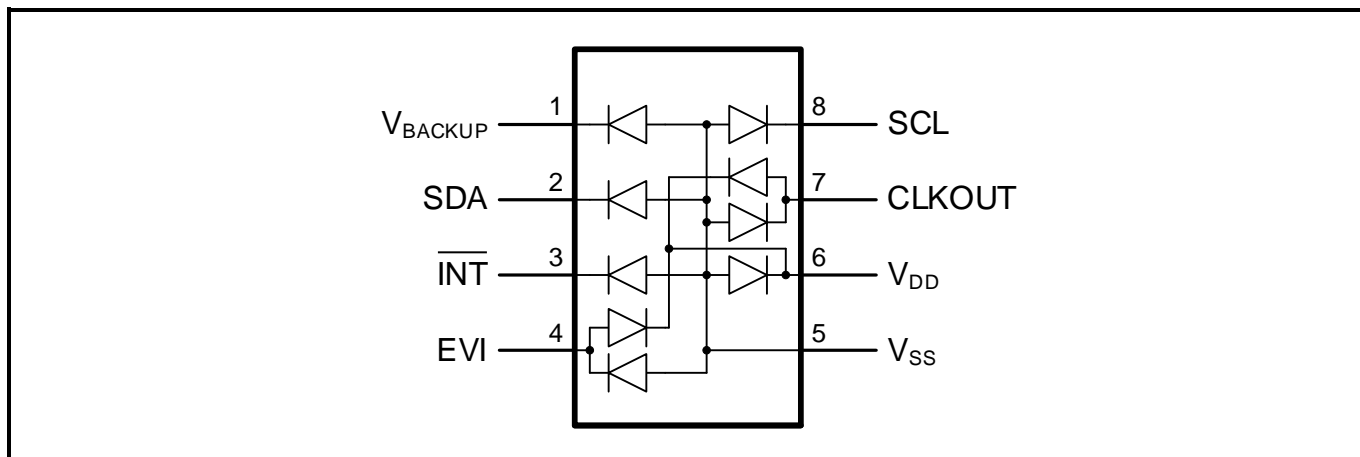2.4. DEVICE PROTECTION DIAGRAM

3. REGISTER ORGANIZATION

- RAM Registers at addresses 00h to 4Fh are accessed by selecting a register address and then performing read or write operations. Multiple reads or writes may be executed in a single access, with the address automatically incrementing after each byte.
- The Configuration Registers at addresses C0h to CAh are memorized in EEPROM and mirrored in RAM. For the RAM mirror, multiple reads or writes may be executed in a single access, with the address automatically incrementing after each byte.
- There are 32 Bytes of non-volatile user memory EEPROM at addresses CBh to EAh for general use.

The tables in section REGISTER OVERVIEW summarize the function of each register.

3.1. REGISTER CONVENTIONS

The conventions in this table serve as a key for the register overview and individual register diagrams:

Convention (Conv.)	Description
R	Read only. Writing to this register has no effect.
W	Write only. Returns 0 when read.
R/WP	Read: Always readable. Write: Can be write-protected by password.
WP	Write only. Returns 0 when read. Can be write-protected by password.
*WP	EEPW registers: Can be write-protected by password. RAM mirror is Write only. Returns 0 when read. EEPROM can be READ when unlocked.
Prot.	Protected. Writing to this register has no effect.

3.2. REGISTER OVERVIEW

After reset, all registers are set according to Table in section REGISTER RESET VALUES SUMMARY.

Register Definitions; RAM, Address 00h to 25h:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
00h	100 th Seconds	R	80	40	20	10	8	4	2	1	
01h	Seconds	R/WP	○	40	20	10	8	4	2	1	
02h	Minutes	R/WP	○	40	20	10	8	4	2	1	
03h	Hours	R/WP	○	○	20	10	8	4	2	1	
04h	Weekday	R/WP	○	○	○	○	○	4	2	1	
05h	Date	R/WP	○	○	20	10	8	4	2	1	
06h	Month	R/WP	○	○	○	10	8	4	2	1	
07h	Year	R/WP	80	40	20	10	8	4	2	1	
08h	Minutes Alarm	R/WP	AE_M	40	20	10	8	4	2	1	
09h	Hours Alarm	R/WP	AE_H	○	20	10	8	4	2	1	
0Ah	Date Alarm	R/WP	AE_D	○	20	10	8	4	2	1	
0Bh	Timer Value 0	R/WP	128	64	32	16	8	4	2	1	
0Ch	Timer Value 1	R/WP	○	○	○	○	2048	1024	512	256	
0Dh	Status	R/WP	THF	TLF	UF	TF	AF	EVF	PORF	VLF	
0Eh	Temperature LSBs	R/WP	TEMP [3:0]				EEF	EEbusy	CLKF	BSF	
0Fh	Temperature MSBs	R	TEMP [11:4]								
10h	Control 1	R/WP	-	-	GP0	USEL	TE	EERD	TD		
11h	Control 2	R/WP	-	CLKIE	UIE	TIE	AIE	EIE	GP1	STOP	
12h	Control 3	R/WP	-	-	-	BSIE	THE	TLE	THIE	TLIE	
13h	Time Stamp Contr.	R/WP	-	-	EVR	THR	TLR	EVOW	THOW	TLOW	
14h	Clock Int. Mask	R/WP	CLKD	INTDE	CEIE	CAIE	CTIE	CUIE	CTHIE	CTLIE	
15h	EVI Control	R/WP	CLKDE	EHL	ET		○	○	○	ESYN	
16h	TLow Threshold	R/WP	TLT								
17h	THigh Threshold	R/WP	THT								
18h	TS TLow Count	R	128	64	32	16	8	4	2	1	
19h	TS TLow Seconds	R	○	40	20	10	8	4	2	1	
1Ah	TS TLow Minutes	R	○	40	20	10	8	4	2	1	
1Bh	TS TLow Hours	R	○	○	20	10	8	4	2	1	
1Ch	TS TLow Date	R	○	○	20	10	8	4	2	1	
1Dh	TS TLow Month	R	○	○	○	10	8	4	2	1	
1Eh	TS TLow Year	R	80	40	20	10	8	4	2	1	
1Fh	TS THigh Count	R	128	64	32	16	8	4	2	1	
20h	TS THigh Seconds	R	○	40	20	10	8	4	2	1	
21h	TS THigh Minutes	R	○	40	20	10	8	4	2	1	
22h	TS THigh Hours	R	○	○	20	10	8	4	2	1	
23h	TS THigh Date	R	○	○	20	10	8	4	2	1	
24h	TS THigh Month	R	○	○	○	10	8	4	2	1	
25h	TS THigh Year	R	80	40	20	10	8	4	2	1	

○ Read only. Always 0.
- Bit not implemented. Will return a 0 when read.

Register Definitions; RAM, Address 26h to FFh:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
26h	TS EVI Count	R	128	64	32	16	8	4	2	1
27h	TS EVI 100 th Secs.	R	80	40	20	10	8	4	2	1
28h	TS EVI Seconds	R	○	40	20	10	8	4	2	1
29h	TS EVI Minutes	R	○	40	20	10	8	4	2	1
2Ah	TS EVI Hours	R	○	○	20	10	8	4	2	1
2Bh	TS EVI Date	R	○	○	20	10	8	4	2	1
2Ch	TS EVI Month	R	○	○	○	10	8	4	2	1
2Dh	TS EVI Year	R	80	40	20	10	8	4	2	1
2Eh to 38h	RESERVED	Prot.	RESERVED							
39h	Password 0	W	PW [7:0]							
3Ah	Password 1	W	PW [15:8]							
3Bh	Password 2	W	PW [23:16]							
3Ch	Password 3	W	PW [31:24]							
3Dh	EE Address	R/WP	EEADDR							
3Eh	EE Data	R/WP	EEDATA							
3Fh	EE Command	WP	EECMD							
40h to 4Fh	User RAM (16 Bytes)	R/WP	16 Bytes of User RAM							
50h to BFh	RESERVED	Prot.	RESERVED							
CBh to FFh	RESERVED	Prot.	RESERVED							

○ Read only. Always 0.

Register Definitions; Configuration EEPROM with RAM mirror, Address C0h to CAh:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
C0h	EEPROM PMU	R/WP	-	NCLKE	BSM		TCR		TCM	
C1h	EEPROM Offset	R/WP	PORIE	VLIE	OFFSET					
C2h	EEPROM Clkout 1	R/WP	HFD [7:0]							
C3h	EEPROM Clkout 2	R/WP	OS	FD	HFD [12:8]					
C4h	EEPROM TReference 0	R/WP	TREF [7:0]							
C5h	EEPROM TReference 1	R/WP	TREF [15:8]							
C6h	EEPROM Password 0	*WP	EEPW [7:0]							
C7h	EEPROM Password 1	*WP	EEPW [15:8]							
C8h	EEPROM Password 2	*WP	EEPW [23:16]							
C9h	EEPROM Password 3	*WP	EEPW [31:24]							
CAh	EEPROM PW Enable	WP	EEPWE							

- Bit not implemented. Will return a 0 when read.
 *WP: The EEPW registers can be write-protected by password.
 RAM mirror is Write only. Returns 0 when read. EEPROM can be READ when unlocked.

Register Definitions; User EEPROM, Address CBh to EAh:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
CBh to EAh	User EEPROM (32 Bytes)	R/WP	32 Bytes of non-volatile User EEPROM							

3.3. CLOCK REGISTERS

00h – 100th Seconds

This register holds the count of hundredths of seconds, in two binary coded decimal (BCD) digits. Values will be from 00 to 99.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
00h	100 th Seconds	R	80	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	100 th Seconds	00 to 99	Holds the count of hundredths of seconds, coded in BCD format. When STOP bit is set to 1 or when writing to the Seconds register or when ESYN bit is 1 in case of an External Event detection on EVI pin the 100 th Seconds register value is cleared to 00 (see TIME SYNCHRONIZATION).							

01h – Seconds

This register holds the count of seconds, in two binary coded decimal (BCD) digits. Values will be from 00 to 59. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
01h	Seconds	R/WP	○	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	○	0	Read only. Always 0.							
6:0	Seconds	00 to 59	Holds the count of seconds, coded in BCD format. When writing to the Seconds register the 100 th Seconds register is cleared to 00 (similar to ESYN Bit function). When STOP bit is 1 the Seconds register value remains unchanged because 1 Hz clock is stopped (see TIME SYNCHRONIZATION).							

02h – Minutes

This register holds the count of minutes, in two binary coded decimal (BCD) digits. Values will be from 00 to 59. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
02h	Minutes	R/WP	○	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	○	0	Read only. Always 0.							
6:0	Minutes	00 to 59	Holds the count of minutes, coded in BCD format.							

03h – Hours

This register holds the count of hours, in two binary coded decimal (BCD) digits. Values will be from 00 to 23.
Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
03h	Hours	R/WP	○	○	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:6	○	0	Read only. Always 0.							
5:0	Hours	00 to 23	Holds the count of hours, coded in BCD format.							

3.4. CALENDAR REGISTERS**04h – Weekday**

This register holds the current day of the week. Each value represents one weekday that is assigned by the user. Values will range from 0 to 6. The weekday counter is simply a 3-bit counter which counts up to 6 and then resets to 0.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
04h	Weekday	R/WP	○	○	○	○	○	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:3	○	0	Read only. Always 0.							
2:0	Weekday	0 to 6	Holds the weekday counter value.							
Weekday			Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Weekday 1 – Default value			0	0	0	0	0	0	0	0
Weekday 2								0	0	1
Weekday 3								0	1	0
Weekday 4								0	1	1
Weekday 5								1	0	0
Weekday 6								1	0	1
Weekday 7								1	1	0

05h – Date

This register holds the current day of the month, in two binary coded decimal (BCD) digits. Values will range from 01 to 31. Leap years are correctly handled from 2000 to 2099.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
05h	Date	R/WP	○	○	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	1
Bit	Symbol	Value	Description							
7:6	○	0	Read only. Always 0.							
5:0	Date	01 to 31	Holds the current date of the month, coded in BCD format. – Default value = 01 (01 is a valid date)							

06h – Month

This register holds the current month, in two binary coded decimal (BCD) digits. Values will range from 01 to 12. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
06h	Month	R/WP	○	○	○	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	1
Bit	Symbol	Value	Description							
7:5	○	0	Read only. Always 0.							
4:0	Month	01 to 12	Holds the current month, coded in BCD format.							
Months			Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
January – Default value			0	0	0	0	0	0	0	1
February						0	0	0	1	0
March						0	0	0	1	1
April						0	0	1	0	0
May						0	0	1	0	1
June						0	0	1	1	0
July						0	0	1	1	1
August						0	1	0	0	0
September						0	1	0	0	1
October						1	0	0	0	0
November						1	0	0	0	1
December						1	0	0	1	0

07h – Year

This register holds the current year, in two binary coded decimal (BCD) digits. Values will range from 00 to 99. Leap years are correctly handled from 2000 to 2099.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
07h	Year	R/WP	80	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	Year	00 to 99	Holds the current year, coded in BCD format. – Default value = 00							

3.5. ALARM REGISTERS

08h – Minutes Alarm

This register holds the Minutes Alarm Enable bit AE_M and the alarm value for minutes, in two binary coded decimal (BCD) digits. Values will range from 00 to 59.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
08h	Minutes Alarm	R/WP	AE_M	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	AE_M	Minutes Alarm Enable bit. Enables alarm together with AE_H and AE_D (see USE OF THE ALARM INTERRUPT).								
		0	Enabled. – Default value							
		1	Disabled.							
6:0	Minutes Alarm	00 to 59	Holds the alarm value for minutes, coded in BCD format.							

09h – Hours Alarm

This register holds the Hours Alarm Enable bit AE_H and the alarm value for hours, in two binary coded decimal (BCD) digits. Values will range from 00 to 23.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
09h	Hours Alarm	R/WP	AE_H	○	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	AE_H	Hours Alarm Enable bit. Enables alarm together with AE_M and AE_D (see USE OF THE ALARM INTERRUPT).								
		0	Enabled. – Default value							
		1	Disabled.							
6	○	0	Read only. Always 0.							
5:0	Hours Alarm	00 to 23	Holds the alarm value for hours, coded in BCD format.							

0Ah – Date Alarm

This register holds the Date Alarm Enable bit AE_D and the alarm value for the date, in two binary coded decimal (BCD) digits. Values will range from 01 to 31. Leap years are correctly handled from 2000 to 2099.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0Ah	Date Alarm	R/WP	AE_D	○	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	AE_D	Date Alarm Enable bit. Enables alarm together with AE_M and AE_H (see USE OF THE ALARM INTERRUPT).								
		0	Enabled. – Default value							
		1	Disabled.							
6	○	0	Read only. Always 0.							
5:0	Date Alarm	01 to 31	Holds the alarm value for the date, coded in BCD format. If the Date Alarm is to be used, the invalid value (00) must be replaced with a valid one (01 to 31). ⁽¹⁾							
⁽¹⁾ Note that an alarm is never generated after POR because of the default values AE_D = 0 = enabled, Date = 01 (valid) and Date Alarm = 00h (not valid).										

3.6. PERIODIC COUNTDOWN TIMER CONTROL REGISTERS

0Bh – Timer Value 0

This register is used to set the lower 8 bits of the 12 bit Timer Value (preset value) for the Periodic Countdown Timer. This value will be automatically reloaded into the Countdown Timer when it reaches zero. This allows for periodic timer interrupts (see calculation below).

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0Bh	Timer Value 0	R/WP	128	64	32	16	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	Timer Value 0	00h to FFh	The Timer Value for the Periodic Countdown Timer in binary format (lower 8 bit) (see USE OF THE PERIODIC COUNTDOWN TIMER). When read, only the preset value is returned and not the current value. When the Periodic Countdown Timer Interrupt function is not used, register 0Bh can be used as RAM byte.							

0Ch – Timer Value 1

This register is used to set the upper 4 bits of the 12 bit Timer Value (preset value) for the Periodic Countdown Timer. This value will be automatically reloaded into the Countdown Timer when it reaches zero. This allows for periodic timer interrupts (see calculation below).

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0Ch	Timer Value 1	R/WP	○	○	○	○	2048	1024	512	256
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:4	○	0	Read only. Always 0.							
3:0	Timer Value 1	0h to Fh	The Timer Value for the Periodic Countdown Timer in binary format (upper 4 bit) (see USE OF THE PERIODIC COUNTDOWN TIMER). When read, only the preset value is returned and not the current value.							

Countdown Period in seconds:

$$\text{Countdown Period} = \frac{\text{Timer Value}}{\text{Timer Clock Frequency}}$$

3.7. STATUS REGISTER

0Dh – Status

This register is used to detect the occurrence of various interrupt events and reliability problems in internal data.

Note that flags are read/clear only.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
0Dh	Status	R/WP	THF	TLF	UF	TF	AF	EVF	PORF	VLF	
	Reset		0	0	0	0	0	X	1	0	
Bit	Symbol	Value	Description								
7	THF	Temperature High Flag (see TEMPERATURE HIGH INTERRUPT FUNCTION)									
		0	No event detected.								
6	TLF	Temperature Low Flag (see TEMPERATURE LOW INTERRUPT FUNCTION)									
		0	No event detected.								
5	UF	Periodic Time Update Flag (see PERIODIC TIME UPDATE INTERRUPT FUNCTION)									
		0	No event detected.								
4	TF	Periodic Countdown Timer Flag (see PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION)									
		0	No event detected.								
3	AF	Alarm Flag (see ALARM INTERRUPT FUNCTION)									
		0	No event detected.								
2	EVF	External Event Flag (see EXTERNAL EVENT INTERRUPT FUNCTION)									
		X	The Reset value X depends on the voltage on the EVI pin at POR and has to be cleared by writing a 0 to the bit. Because EHL = 0 at POR, the low level is regarded as an External Event Interrupt. If X = 1, a LOW level was detected on EVI pin. If X = 0, no LOW level was detected on EVI pin.								
1	PORF	Power On Reset Flag (see POWER ON RESET INTERRUPT FUNCTION)									
		0	No V _{DD} startup from below V _{POR} (0.9 V) in VDD Power state detected.								
0	VLF	Voltage Low Flag (see VOLTAGE LOW INTERRUPT FUNCTION)									
		0	No voltage drop of the internal voltage below V _{LOW} detected (V _{DD} or V _{BACKUP}). At power on (POR) the VLF flag is automatically cleared to 0.								
		1	If set to 0 beforehand, indicates a voltage drop below V _{LOW} (typical 1.2 V). The sampling frequency is 1 Hz. The data in the device may no longer be valid and all registers should be reinitialized. The value 1 is retained until a 0 is written by the user. If the internal voltage is below V _{LOW} , the temperature compensation is stopped, CLKOUT is LOW and the I ² C interface is disabled (V _{DD} < 1.4 V).								

⁽¹⁾ Note that the THF and TLF flags are always reset whenever the register 0Dh Status is written to (using 0s or 1s).

3.8. TEMPERATURE REGISTERS

0Eh – Temperature LSBs

This register hosts the 4 least significant bits (LSBs) of the Temperature value TEMP [11:0] in two's complement format (fractional part). The register is also used to detect the occurrence of various interrupt events and reliability problems in internal data.

Note that the flags (EEF, CLKF and BSF) are read/clear only.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
0Eh	Temperature LSBs	R/WP	TEMP [3:0]				EEF	EEbusy	CLKF	BSF	
	Reset		0h → Xh				0	1 → 0	0	0	
Bit	Symbol	Value	Description								
7:4	TEMP [3:0]	0h to Fh	Fractional part of the Temperature value TEMP [11:0] in two's complement format. – (Read Only) Stores the last value of the measured internal temperature. Allows the higher measurement resolution of $1/16 = 0.0625^{\circ}\text{C}$. See table below (see also TEMPERATURE REFERENCE ADJUSTMENT). The internal temperature sensing itself is carried out automatically every second. One second after POR, the first temperature value (Xh) is available. Hint: The integer part TEMP [11:4] in register Temperature MSBs is automatically compared to the TLow and THigh Thresholds (see TEMPERATURE THRESHOLDS REGISTERS).								
3	EEF	EEPROM Memory Write Access Failed Flag (see EEF FLAG)									
		0	Previous write access was successful.								
1		1	If set to 0 beforehand, indicates that the EEPROM write access has failed because V_{DD} has dropped below $V_{DD:EEF}$ (1.3 V). The value 1 is retained until a 0 is written by the user.								
2	EEbusy	EEPROM Memory Busy Status Bit – (Read Only) (see EEBUSY BIT)									
		0	The transfer is finished.								
1		1	Indicates that the EEPROM is currently handling a read or write request and will ignore any further commands until the current one is finished. At power up (POR) a refresh is automatically generated. The time of this first refreshment is $t_{PREFR} = \sim 66$ ms. After the refreshment is finished; EEbusy is cleared to 0 automatically.								
1	CLKF	Clock Output Interrupt Flag (see INTERRUPT CONTROLLED CLOCK OUTPUT)									
		0	No event detected.								
1		1	If set to 0 beforehand, indicates the occurrence of an interrupt driven clock output on CLKOUT pin. The value 1 is retained until a 0 is written by the user.								
0	BSF	Backup Switch Flag (see AUTOMATIC BACKUP SWITCHOVER FUNCTION)									
		0	No backup switchover detected. At power up (POR) this flag is automatically cleared to 0. When the backup switchover function is disabled (BSM field = 00 or 11) BSF is always logic 0.								
1		1	If set to 0 beforehand, indicates that a switchover from main power V_{DD} to V_{BACKUP} has occurred. The value 1 can be cleared by writing a 0 to the bit if RTC module is in VDD Power state.								

0Fh – Temperature MSBs

This register hosts the 8 most significant bits (MSBs) of the Temperature value TEMP [11:0] in two's complement format (integer part).

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0Fh	Temperature MSBs	R	TEMP [11:4]							
	Reset		00h → XXh							
Bit	Symbol	Value	Description							
7:0	TEMP [11:4]	00h to FFh	Integer part of the Temperature value TEMP [11:0] in two's complement format. – (Read Only) Stores the last value of the measured internal temperature with 1°C resolution in two's complement format. See table below (see also TEMPERATURE REFERENCE ADJUSTMENT). The internal temperature sensing itself is carried out automatically every second. One second after POR, the first temperature value (XXh) is available. The TEMP [11:4] value is automatically compared to the TLow and THigh Thresholds (see TEMPERATURE THRESHOLDS REGISTERS).							

Temperature/Data relationship:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0Eh	Temperature LSBs	R/WP	2 ⁻¹	2 ⁻²	2 ⁻³	2 ⁻⁴	EEF	EEbusy	CLKF	BSF
0Fh	Temperature MSBs	R	Sign	2 ⁶	2 ⁵	2 ⁴	2 ³	2 ²	2 ¹	2 ⁰

TEMP (12 bits) examples:

TEMP [11:0] value	Hexadecimal	Decimal	Signed decimal (two's complement)	Temperature in °C(*)
0111'1111'1111	7FF	2047	2047	127.9375
0110'1001'0000	690	1680	1680	105
0101'0101'0000	550	1360	1360	85
0100'1011'0000	4B0	1200	1200	75
0011'0010'0000	320	800	800	50
0001'1001'0000	190	400	400	25
0000'0001'0000	010	16	16	1
0000'0000'0100	004	4	4	0.25
0000'0000'0001	001	1	1	0.0625
0000'0000'0000 (default)	000	0	0	0
1111'1111'1111	FFF	4095	-1	-0.0625
1111'1111'1100	FFC	4092	-4	-0.25
1111'1111'0000	FF0	4080	-16	-1
1110'0111'0000	E70	3696	-400	-25
1101'1000'0000	D80	3456	-640	-40
1000'0000'0000	800	2048	-2048	-128

(*) Temperature value in °C = Signed decimal / 16 = Signed decimal × 0.0625.

Note that there is no need to read the Temperature LSBs byte (TEMP [3:0]) if resolution below 1°C is not required.

Note that the thermometer must not be operated outside the temperature range from -40 to +105°C specified by the RV-3032-C7 module.

Note: The Temperature LSBs and Temperature MSBs registers know no blocking/shadowing. To get a valid 12-bit temperature value, the TEMP [11:0] value should be read after the 1 Hz tick, or up to 1 ms before a 1 Hz tick (or TEMP [11:0] value can be read twice, and then compared).

3.9. CONTROL REGISTERS

10h – Control 1

This register is used to specify the source for the Periodic Time Update Interrupt function and to select or set operations for the Periodic Countdown Timer. It also holds the control bit for automatic refresh of the Configuration Registers.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
10h	Control 1	R/WP	-	-	GP0	USEL	TE	EERD	TD	
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:6	-	0	Bit not implemented. Will return a 0 when read.							
5	GP0	0 or 1	Register bit for general purpose use.							
4	USEL	Update Interrupt Select bit. Specifies either Second or Minute update for the Periodic Time Update Interrupt function. (see PERIODIC TIME UPDATE INTERRUPT FUNCTION). When STOP bit is set to 1 the interrupt function is stopped. When writing to the Seconds register or when ESYN bit is 1 in case of an External Event detection on EVI pin the length of the current update period is affected (see TIME SYNCHRONIZATION).								
		0	Second update (Auto reset time $t_{RTN2} = 500$ ms). – Default value							
		1	Minute update (Auto reset time $t_{RTN2} = 15.6$ ms).							
3	TE	Periodic Countdown Timer Enable bit. This bit controls the start/stop setting for the Periodic Countdown Timer Interrupt function (see PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION).								
		0	Stops the Periodic Countdown Timer Interrupt function. – Default value							
		1	Starts the Periodic Countdown Timer Interrupt function (a countdown starts from the preset value set in Timer Value registers).							
2	EERD	EEPROM Memory Refresh Disable bit. When 1, disables the automatic refresh of the Configuration Registers from the EEPROM Memory (see AUTOMATIC REFRESH (ALL CONFIGURATION EEPROM → RAM)).								
		0	Refresh is active. All data in the Configuration Registers are refreshed by the data stored in the EEPROM each 24 hours, at date increment (at the beginning of the last second before midnight). The time of this automatic refreshment is $t_{AREFR} = \sim 3.5$ ms. Refresh is only active when RTC is not in VBACKUP Power state and $V_{DD} \geq V_{LOW}$. – Default value							
		1	Refresh is disabled.							
1:0	TD	00 to 11	Timer Clock Frequency selection. Sets the countdown source clock for the Periodic Countdown Timer Interrupt function. With this setting the Auto reset time t_{RTN1} is also defined. See table below (see also PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION). When the clock source has been set to Second update (1 Hz) or Minute update (1/60 Hz), the timing of both, countdown and interrupts, is coordinated with the clock update timing but has a maximum jitter of 30.5 μ s. When STOP bit is set to 1 the interrupt function is stopped. When writing to the Seconds register or when ESYN bit is 1 in case of an External Event detection on EVI pin the length of the current countdown period is affected (see TIME SYNCHRONIZATION).							
TD value	Timer Clock Frequency	Countdown period	t_{RTN1}				STOP bit			
00	4096 Hz – Default value	244.14 μ s	122 μ s				When STOP bit is set to 1 the interrupt function is stopped (see also TIME SYNCHRONIZATION).			
01	64 Hz	15.625 ms	7.813 ms							
10	1 Hz	1 s								
11	1/60 Hz	60 s								

11h – Control 2

This register is used to enable the interrupt controlled clock output on CLKOUT pin and to control the interrupt event output for the $\overline{\text{INT}}$ pin and the stop/start status of clock and calendar operations.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
11h	Control 2	R/WP	-	CLKIE	UIE	TIE	AIE	EIE	GP1	STOP
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	-	0	Bit not implemented. Will return a 0 when read.							
6	CLKIE	Interrupt Controlled Clock Output Enable bit. When enabled, it is possible to wake-up an external system by outputting a frequency. (see INTERRUPT CONTROLLED CLOCK OUTPUT)								
		0	Disabled – Default value							
1		When set to 1, the clock output on CLKOUT pin is automatically enabled when an interrupt occurs, based on the Clock Interrupt Mask (register 14h) and according to the clock setting defined in registers EEPROM Clkout 1 and EEPROM Clkout 2 (C2h and C3h). This function is disabled in VBACKUP Power state (clock output when back in VDD Power state).								
5	UIE	Periodic Time Update Interrupt Enable bit (see PERIODIC TIME UPDATE INTERRUPT FUNCTION)								
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin and UF flag is not set when a Periodic Time Update event occurs or the t_{RTN2} - signal on $\overline{\text{INT}}$ pin is cancelled. – Default value							
1		An interrupt signal is generated on $\overline{\text{INT}}$ pin and the UF flag is set when a Periodic Time Update event occurs. The low-level output signal is automatically cleared after $t_{\text{RTN2}} = 500$ ms (Second update) or $t_{\text{RTN2}} = 15.6$ ms (Minute update). ⁽¹⁾								
4	TIE	Periodic Countdown Timer Interrupt Enable bit (see PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION)								
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin when a Periodic Countdown Timer event occurs or the t_{RTN1} - signal on $\overline{\text{INT}}$ pin is cancelled. – Default value							
1		An interrupt signal is generated on $\overline{\text{INT}}$ pin when a Periodic Countdown Timer event occurs. The low-level output signal is automatically cleared after $t_{\text{RTN1}} = 122$ μs (TD = 00) or $t_{\text{RTN1}} = 7.813$ ms (TD = 01, 10, 11). ⁽¹⁾								
3	AIE	Alarm Interrupt Enable bit (see ALARM INTERRUPT FUNCTION)								
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin when an Alarm event occurs or the signal is cancelled on $\overline{\text{INT}}$ pin. – Default value							
1		An interrupt signal is generated on $\overline{\text{INT}}$ pin when an Alarm event occurs. The signal on $\overline{\text{INT}}$ pin is retained until the AF flag is cleared to 0 (no automatic cancellation). ⁽¹⁾								
2	EIE	External Event Interrupt Enable bit (see EXTERNAL EVENT INTERRUPT FUNCTION and INTERRUPT SCHEME)								
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin when an External Event on EVI pin occurs or the signal is cancelled on $\overline{\text{INT}}$ pin. – Default value							
1		An interrupt signal is generated on $\overline{\text{INT}}$ pin when an External Event on EVI pin occurs. The signal on $\overline{\text{INT}}$ pin is retained until the EVF flag is cleared to 0 (no automatic cancellation). ⁽¹⁾								
1	GP1	0 or 1	Register bit for general purpose use.							
0	STOP	Stop bit. This bit is used for a software-based time adjustment (synchronization) (see STOP BIT FUNCTION).								
		0	Not stopped. – Default value							
1		Stops and resets the clock prescaler frequencies from 4096 Hz to 1 Hz and the 100 th Seconds register is reset to 00. A possible currently memorized 1 Hz update is also reset. The following functions are stopped: Clock and calendar (with alarm), CLKOUT, timer clock, update timer clock, EVI input filter, temperature measurement, temperature compensation and temperature comparison with THT and TLT values are stopped (see also TIME SYNCHRONIZATION). The External Event Interrupt function is still working but cannot provide useful data.								

⁽¹⁾ Interrupt Delay after CLKOUT On can be activated by setting bit INTDE.

12h – Control 3

This register is used to enable temperature detections and to control the interrupt event output for the $\overline{\text{INT}}$ pin.
Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
12h	Control 3	R/WP	-	-	-	BSIE	THE	TLE	THIE	TLIE
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:5	-	0	Bit not implemented. Will return a 0 when read.							
4	BSIE	Backup Switchover Interrupt Enable bit (see AUTOMATIC BACKUP SWITCHOVER FUNCTION and AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION)								
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin when an Automatic Backup Switchover occurs or the signal is cancelled on $\overline{\text{INT}}$ pin. – Default value							
		1	An interrupt signal is generated on $\overline{\text{INT}}$ pin when an Automatic Backup Switchover occurs. The signal on $\overline{\text{INT}}$ pin is retained until the BSF flag is cleared to 0 (no automatic cancellation).							
3	THE	Temperature High Enable bit (see TEMPERATURE HIGH INTERRUPT FUNCTION)								
		0	Temperature High detection is disabled. – Default value							
		1	Enables the Temperature High detection with programmable Temperature High Threshold, and the corresponding Time Stamp function. An event is generated every second, when $\text{TEMP} [11:4] > \text{THT}$.							
2	TLE	Temperature Low Enable bit (see TEMPERATURE LOW INTERRUPT FUNCTION)								
		0	Temperature Low detection is disabled. – Default value							
		1	Enables the Temperature Low detection with programmable Temperature Low Threshold, and the corresponding Time Stamp function. An event is generated every second, when $\text{TEMP} [11:4] < \text{TLT}$.							
1	THIE	Temperature High Interrupt Enable bit (see TEMPERATURE HIGH INTERRUPT FUNCTION and INTERRUPT SCHEME)								
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin when Temperature High is detected or the signal is cancelled on $\overline{\text{INT}}$ pin. – Default value							
		1	An interrupt signal is generated on $\overline{\text{INT}}$ pin when Temperature High is detected. The signal on $\overline{\text{INT}}$ pin is retained until the THF flag is cleared to 0 (no automatic cancellation). ⁽¹⁾ ⁽²⁾							
0	TLIE	Temperature Low Interrupt Enable bit (see TEMPERATURE LOW INTERRUPT FUNCTION and INTERRUPT SCHEME)								
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin when Temperature Low is detected or the signal is cancelled on $\overline{\text{INT}}$ pin. – Default value							
		1	An interrupt signal is generated on $\overline{\text{INT}}$ pin when Temperature Low is detected. The signal on $\overline{\text{INT}}$ pin is retained until the TLF flag is cleared to 0 (no automatic cancellation). ⁽¹⁾ ⁽²⁾							
⁽¹⁾ Interrupt Delay after CLKOUT On can be activated by setting bit INTDE.										
⁽²⁾ Note that the THF and TLF flags are always reset whenever the register 0Dh Status is written to (using 0s or 1s).										

3.10. TIME STAMP CONTROL REGISTER

13h – Time Stamp Control

This register holds the control bits for the Time Stamp data.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
13h	Time Stamp Control	R/WP	○	○	EVR	THR	TLR	EVOW	THOW	TLOW	
	Reset		0	0	0	0	0	0	0	0	
Bit	Symbol	Value	Description								
7:6	○	0	Read only. Always 0.								
5	EVR	Time Stamp EVI Reset bit (see TIME STAMP EVI FUNCTION)									
		0	Disabled. – Default value								
4	THR	Time Stamp THigh Reset bit (see TIME STAMP THIGH FUNCTION)									
		0	Disabled. – Default value								
3	TLR	Time Stamp TLow Reset bit (see TIME STAMP TLOW FUNCTION)									
		0	Disabled. – Default value								
2	EVOW	Time Stamp EVI Overwrite bit. Controls the overwrite function of the TS EVI registers (TS EVI 100 th Seconds to TS EVI Year). The TS EVI Count register always counts events, regardless of the settings of the override bit EVOW. (see TIME STAMP EVI FUNCTION)									
		0	The time stamp of the first occurred event is recorded and remains in TS EVI registers. – Default value To initialize or reinitialize the first event detection function, 1 has to be written to the EVR bit to clear all TS EVI registers (POR has same effect, when EVI pin = HIGH). Caution: For the Time Stamp EVI function, only the TS EVI Count register is responsible for detecting first or last event, and therefore, always after an overflow of the TS EVI Count register from 255 to 0, a new First Event is allowed by the function (see also TIME STAMP EVI SCHEME).								
1	THOW	Time Stamp THigh Overwrite bit. Controls the overwrite function of the TS THigh registers (TS THigh Seconds to TS THigh Year). The TS THigh Count register always counts events, regardless of the settings of the override bit THOW. (see TIME STAMP THIGH FUNCTION)									
		0	The time stamp of the first occurred event is recorded and remains in TS THigh registers. – Default value To initialize or reinitialize the first event detection function, 1 has to be written to the THR bit to clear all TS THigh registers (POR has same effect).								
0	TLOW	Time Stamp TLow Overwrite bit. Controls the overwrite function of the TS TLow registers (TS TLow Seconds to TS TLow Year). The TS TLow Count register always counts events, regardless of the settings of the override bit TLOW. (see TIME STAMP TLOW FUNCTION)									
		0	The time stamp of the first occurred event is recorded and remains in TS TLow registers. – Default value To initialize or reinitialize the first event detection function, 1 has to be written to the TLR bit clear all TS TLow registers (POR has same effect).								
			1	The time stamp of the last occurred event is recorded and TS TLow registers are overwritten.							

3.11. CLOCK INTERRUPT MASK REGISTER

14h – Clock Interrupt Mask

This register is used select a CLKOUT off Delay Value after I²C STOP and to enable the Interrupt Delay after CLKOUT On. It is also used to select a predefined interrupt for Interrupt Controlled Clock Output. Setting a bit to 1 selects the corresponding interrupt. Multiple interrupts can be selected. After power on, no interrupt is selected (see INTERRUPT SCHEME and CLOCK OUTPUT SCHEME).

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
14h	Clock Interrupt Mask	R/WP	CLKD	INTDE	CEIE	CAIE	CTIE	CUIE	CTHIE	CTLIE
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	CLKD		CLKOUT (switch) off Delay Value after I ² C STOP Selection bit. Applicable only when CLKDE bit in the EVI Control register is set to 1. (see CLKOUT OFF DELAY AFTER I2C STOP)							
		0	Typical delay time $t_{I2C:CLK} = 1.4$ ms. – Default value							
		1	Typical delay time $t_{I2C:CLK} = 75$ ms.							
6	INTDE		Interrupt Delay after CLKOUT On Enable bit. Applicable only when NCLKE bit in the EEPROM PMU register is set to 1 (CLKOUT not directly enabled) and for interrupts enabled by CEIE, CAIE, CTIE, CUIE, CTHIE or CTLIE (see INTERRUPT DELAY AFTER CLKOUT ON)							
		0	No delay. – Default value							
		1	Enables the delay time $t_{CLK:INT}$ of 1/256 seconds to 3/512 seconds \approx 3.9 ms to 5.9 ms.							
5	CEIE		Clock output when EVI Interrupt Enable bit.							
		0	Disabled – Default value							
		1	Enabled. Internal signal EI is selected. ⁽¹⁾							
4	CAIE		Clock output when Alarm Interrupt Enable bit.							
		0	Disabled – Default value							
		1	Enabled. Internal signal AI is selected. ⁽¹⁾							
3	CTIE		Clock output when Periodic Countdown Timer Interrupt Enable bit.							
		0	Disabled – Default value							
		1	Enabled: Internal signal TI is selected. ⁽¹⁾ If TD = 00 (4096 Hz) is selected, no interrupt delay is added.							
2	CUIE		Clock output when Periodic Time Update Interrupt Enable bit.							
		0	Disabled – Default value							
		1	Enabled. Internal signal UI is selected. ⁽¹⁾							
1	CTHIE		Clock output when THigh Interrupt Enable bit.							
		0	Disabled – Default value							
		1	Enabled. Internal signal THI is selected. ⁽¹⁾							
0	CTLIE		Clock output when TLow Interrupt Enable bit							
		0	Disabled – Default value							
		1	Enabled. Internal signal TLI is selected. ⁽¹⁾							
⁽¹⁾ Interrupt Delay after CLKOUT On can be activated by setting bit INTDE.										

3.12. EVI CONTROL REGISTER

15h – EVI Control

This register controls the event detection on the EVI pin. Depending of the EHL bit, high or low level (or rising or falling edge) can be detected. Moreover a digital glitch filtering can be applied to the EVI signal by selecting a sampling period t_{SP} in the ET field. Furthermore this register holds the enable bit for the CLKOUT off Delay after I²C STOP and the External Event Synchronization bit.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
15h	EVI Control	R/WP	CLKDE	EHL	ET		○	○	○	ESYN
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	CLKDE	CLKOUT (switch) off Delay after I ² C STOP Enable bit								
		0	Disabled – Default value							
		1	Enabled. The delay time $t_{I2C:CLK}$ can be selected with CLKD bit in Clock Interrupt Mask register.							
6	EHL	Event High/Low Level (Rising/Falling Edge) selection for detection (see EXTERNAL EVENT INTERRUPT FUNCTION)								
		0	The falling edge (ET = 00) or low level (ET ≠ 00) is regarded as the External Event on pin EVI. – Default value							
		1	The rising edge (ET = 00) or high level (ET ≠ 00) is regarded as the External Event on pin EVI.							
5:4	ET	Event Filtering Time set. Applies a digital filtering to the EVI pin by sampling the EVI signal. (see EXTERNAL EVENT INTERRUPT FUNCTION).								
		00	No filtering. Edge detection. – Default value							
		01	Sampling period $t_{SP} = 3.9$ ms (256 Hz). Edge & Level detection.							
		10	Sampling period $t_{SP} = 15.6$ ms (64 Hz). Edge & Level detection.							
		11	Sampling period $t_{SP} = 125$ ms (8 Hz). Edge & Level detection.							
3:1	○	0	Read only. Always 0.							
0	ESYN	External Event (EVI) Synchronization bit. This bit is used for a hardware-based time adjustment (see ESYN BIT FUNCTION).								
		0	Disabled – Default value							
		1	In case of an External Event detection at the EVI pin the clock prescaler frequencies from 4096 Hz to 1 Hz are reset and the 100 th Seconds register is reset to 00. A possible currently memorized 1 Hz update is also reset. When an External Event occurs, the Time Stamp EVI is always created first and then the 100 th Seconds register is cleared to 00. After the event detection, the ESYN bit is reset to 0 automatically. If 1, the synchronization function can be canceled by resetting the ESYN bit to 0 before an event occurs.							

3.13. TEMPERATURE THRESHOLDS REGISTERS

16h – TLow Threshold

In this register, the user can define the Temperature Low Threshold value TLT which is compared with the TEMP [11:4] value in the Temperature MSBs register. TLT is stored in the same two's complement format as the TEMP [11:4] (see TEMPERATURE REGISTERS).

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
16h	TLow Threshold	R/WP	TLT							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	TLT	-128 to 127	Temperature Low Threshold value with 1°C resolution in two's complement format like TEMP [11:4]. The integer part TEMP [11:4] from the internal temperature is automatically compared to this value. An event is generated when TEMP [11:4] < TLT (see TEMPERATURE REGISTERS, TEMPERATURE LOW INTERRUPT FUNCTION and TIME STAMP TLOW FUNCTION).							

17h – THigh Threshold

In this register, the user can define the Temperature High Threshold value THT which is compared with the TEMP [11:4] value in the Temperature MSBs register. THT is stored in the same two's complement format as the TEMP [11:4] (see TEMPERATURE REGISTERS).

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
17h	THigh Threshold	R/WP	THT							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	THT	-128 to 127	Temperature High Threshold value with 1°C resolution in two's complement format like TEMP [11:4]. The integer part TEMP [11:4] from the internal temperature is automatically compared to this value. An event is generated when TEMP [11:4] > THT (see TEMPERATURE REGISTERS, TEMPERATURE HIGH INTERRUPT FUNCTION and TIME STAMP THIGH FUNCTION).							

3.14. TIME STAMP TLOW REGISTERS

Seven Time Stamp TLow registers (TS TLow Count and TS TLow Seconds to TS TLow Year), (see TIME STAMP TLOW FUNCTION).

18h – TS TLow Count

This register contains the number of occurrences of Temperature Low events (TEMP [11:4] < TLT) in standard binary format. The values range from 0 to 255.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
18h	TS TLow Count	R	128	64	32	16	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	TS TLow Count	0 to 255	Number of occurrences of Temperature Low events, coded in binary. In case of an overflow the counter starts again with 00h. When bit TLE = 0, the counter stops counting events. When bit TLE = 1, the counter is increased when event occurs. The TS TLow Count register always counts events, regardless of the settings of the override bit TLOW. The TS TLow Count register is reset to 00h when 1 is written to the Time Stamp TLow Reset bit TLR (see TIME STAMP TLOW FUNCTION).							

19h – TS TLow Seconds

This register holds a recorded Temperature Low Time Stamp of the Seconds register, in two binary coded decimal (BCD) digits. The values are from 00 to 59.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
19h	TS TLow Seconds	R	○	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	○	0	Read only. Always 0.							
6:0	TS TLow Seconds	00 to 59	Holds a recorded Temperature Low Time Stamp of the Seconds register, coded in BCD format. When enabled (bit TLE = 1), depending on the setting of the TLOW bit, it contains the time stamp of the first or last occurred event. The TS TLow Seconds register is reset to 00h when 1 is written to the Time Stamp TLow Reset bit TLR (see TIME STAMP TLOW FUNCTION).							

1Ah – TS TLow Minutes

This register holds a recorded Temperature Low Time Stamp of the Minutes register, in two binary coded decimal (BCD) digits. The values are from 00 to 59.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1Ah	TS TLow Minutes	R	○	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	○	0	Read only. Always 0.							
6:0	TS TLow Minutes	00 to 59	Holds a recorded Temperature Low Time Stamp of the Minutes register, coded in BCD format. When enabled (bit TLE = 1), depending on the setting of the TLOW bit, it contains the time stamp of the first or last occurred event. The TS TLow Minutes register is reset to 00h when 1 is written to the Time Stamp TLow Reset bit TLR (see TIME STAMP TLOW FUNCTION).							

1Bh – TS TLow Hours

This register holds a recorded Temperature Low Time Stamp of the Hours register, in two binary coded decimal (BCD) digits. Values will range from 00 to 23.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1Bh	TS TLow Hours	R	○	○	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:6	○	0	Read only. Always 0.							
5:0	TS TLow Hours	00 to 23	Holds a recorded Temperature Low Time Stamp of the Hours register, coded in BCD format. When enabled (bit TLE = 1), depending on the setting of the TLOW bit, it contains the time stamp of the first or last occurred event. The TS TLow Hours register is reset to 00h when 1 is written to the Time Stamp TLow Reset bit TLR (see TIME STAMP TLOW FUNCTION).							

1Ch – TS TLow Date

This register holds a recorded Temperature Low Time Stamp of the Date register, in two binary coded decimal (BCD) digits. The values will range from 01 to 31.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1Ch	TS TLow Date	R	○	○	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:6	○	0	Read only. Always 0.							
5:0	TS TLow Date	01 to 31	Holds a recorded Temperature Low Time Stamp of the Date register, coded in BCD format. When enabled (bit TLE = 1), depending on the setting of the TLOW bit, it contains the time stamp of the first or last occurred event. The TS TLow Date register is reset to 00h when 1 is written to the Time Stamp TLow Reset bit TLR (see TIME STAMP TLOW FUNCTION). The value 00 after POR or after the reset with the TLR bit, is replaced by a valid value (01 to 31) when a Temperature Low Time Stamp is recorded.							

1Dh – TS TLow Month

This register holds a recorded Temperature Low Time Stamp of the Month register, in two binary coded decimal (BCD) digits. The values will range from 01 to 12.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1Dh	TS TLow Month	R	○	○	○	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:5	○	0	Read only. Always 0.							
4:0	TS TLow Month	01 to 12	Holds a recorded Temperature Low Time Stamp of the Month register, coded in BCD format. When enabled (bit TLE = 1), depending on the setting of the TLOW bit, it contains the time stamp of the first or last occurred event. The TS TLow Month register is reset to 00h when 1 is written to the Time Stamp TLow Reset bit TLR (see TIME STAMP TLOW FUNCTION). The value 00 after POR or after the reset with the TLR bit, is replaced by a valid value (01 to 12) when a Temperature Low Time Stamp is recorded.							

1Eh – TS TLow Year

This register holds a recorded Temperature Low Time Stamp of the Year register, in two binary coded decimal (BCD) digits. Values will range from 00 to 99.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1Eh	TS TLow Year	R	80	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	TS TLow Year	00 to 99	Holds a recorded Temperature Low Time Stamp of the Year register, coded in BCD format. When enabled (bit TLE = 1), depending on the setting of the TLOW bit, it contains the time stamp of the first or last occurred event. The TS TLow Year register is reset to 00h when 1 is written to the Time Stamp TLow Reset bit TLR (see TIME STAMP TLOW FUNCTION).							

3.15. TIME STAMP THIGH REGISTERS

Seven Time Stamp THigh registers (TS THigh Count and TS THigh Seconds to TS THigh Year), (see TIME STAMP THIGH FUNCTION).

1Fh – TS THigh Count

This register contains the number of occurrences of Temperature High events (TEMP [11:4] > THT) in standard binary format. The values range from 0 to 255.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1Fh	TS THigh Count	R	128	64	32	16	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	TS THigh Count	0 to 255	Number of occurrences of Temperature High events, coded in binary. In case of an overflow the counter starts again with 00h. When bit THE = 0, the counter stops counting events. When bit THE = 1, the counter is increased when event occurs. The TS THigh Count register always counts events, regardless of the settings of the override bit THOW. The TS THigh Count register is reset to 00h when 1 is written to the Time Stamp THigh Reset bit THR (see TIME STAMP THIGH FUNCTION).							

20h – TS THigh Seconds

This register holds a recorded Temperature High Time Stamp of the Seconds register, in two binary coded decimal (BCD) digits. The values are from 00 to 59.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
20h	TS THigh Seconds	R	○	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	○	0	Read only. Always 0.							
6:0	TS THigh Seconds	00 to 59	Holds a recorded Temperature High Time Stamp of the Seconds register, coded in BCD format. When enabled (bit THE = 1), depending on the setting of the THOW bit, it contains the time stamp of the first or last occurred event. The TS THigh Seconds register is reset to 00h when 1 is written to the Time Stamp THigh Reset bit THR (see TIME STAMP THIGH FUNCTION).							

21h – TS THigh Minutes

This register holds a recorded Temperature High Time Stamp of the Minutes register, in two binary coded decimal (BCD) digits. The values are from 00 to 59.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
21h	TS THigh Minutes	R	○	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	○	0	Read only. Always 0.							
6:0	TS THigh Minutes	00 to 59	Holds a recorded Temperature High Time Stamp of the Minutes register, coded in BCD format. When enabled (bit THE = 1), depending on the setting of the THOW bit, it contains the time stamp of the first or last occurred event. The TS THigh Minutes register is reset to 00h when 1 is written to the Time Stamp THigh Reset bit THR (see TIME STAMP THIGH FUNCTION).							

22h – TS THigh Hours

This register holds a recorded Temperature High Time Stamp of the Hours register, in two binary coded decimal (BCD) digits. Values will range from 00 to 23.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
22h	TS THigh Hours	R	○	○	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:6	○	0	Read only. Always 0.							
5:0	TS THigh Hours	00 to 23	Holds a recorded Temperature High Time Stamp of the Hours register, coded in BCD format. When enabled (bit THE = 1), depending on the setting of the THOW bit, it contains the time stamp of the first or last occurred event. The TS THigh Hours register is reset to 00h when 1 is written to the Time Stamp THigh Reset bit THR (see TIME STAMP THIGH FUNCTION).							

23h – TS THigh Date

This register holds a recorded Temperature High Time Stamp of the Date register, in two binary coded decimal (BCD) digits. The values will range from 01 to 31.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
23h	TS THigh Date	R	○	○	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:6	○	0	Read only. Always 0.							
5:0	TS THigh Date	01 to 31	Holds a recorded Temperature High Time Stamp of the Date register, coded in BCD format. When enabled (bit THE = 1), depending on the setting of the THOW bit, it contains the time stamp of the first or last occurred event. The TS THigh Date register is reset to 00h when 1 is written to the Time Stamp THigh Reset bit THR (see TIME STAMP THIGH FUNCTION). The value 00 after POR or after the reset with the THR bit, is replaced by a valid value (01 to 31) when a Temperature High Time Stamp is recorded.							

24h – TS THigh Month

This register holds a recorded Temperature High Time Stamp of the Month register, in two binary coded decimal (BCD) digits. The values will range from 01 to 12.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
24h	TS THigh Month	R	○	○	○	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:5	○	0	Read only. Always 0.							
4:0	TS THigh Month	01 to 12	Holds a recorded Temperature High Time Stamp of the Month register, coded in BCD format. When enabled (bit THE = 1), depending on the setting of the THOW bit, it contains the time stamp of the first or last occurred event. The TS THigh Month register is reset to 00h when 1 is written to the Time Stamp THigh Reset bit THR (see TIME STAMP THIGH FUNCTION). The value 00 after POR or after the reset with the THR bit, is replaced by a valid value (01 to 12) when a Temperature Low Time Stamp is recorded.							

25h – TS THigh Year

This register holds a recorded Temperature High Time Stamp of the Year register, in two binary coded decimal (BCD) digits. Values will range from 00 to 99.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
25h	TS THigh Year	R	80	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	TS THigh Year	00 to 99	Holds a recorded Temperature High Time Stamp of the Year register, coded in BCD format. When enabled (bit THE = 1), depending on the setting of the THOW bit, it contains the time stamp of the first or last occurred event. The TS THigh Year register is reset to 00h when 1 is written to the Time Stamp THigh Reset bit THR (see TIME STAMP THIGH FUNCTION).							

3.16. TIME STAMP EVI REGISTERS

Eight Time Stamp EVI registers (TS EVI Count and TS EVI 100th Seconds to TS EVI Year), (see TIME STAMP EVI FUNCTION).

26h – TS EVI Count

This register contains the number of occurrences of External Events on EVI pin in standard binary format. The values range from 0 to 255.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
26h	TS EVI Count	R	128	64	32	16	8	4	2	1
	Reset		0	0	0	0	0	0	0	X
Bit	Symbol	Value	Description							
7:0	TS EVI Count	0 to 255	Number of occurrences of External Events on EVI pin, coded in binary. In case of an overflow the counter starts again with 00h. The TS EVI Count register always counts events, regardless of the settings of the override bit EVOW. The TS EVI Count register is reset to 00h when 1 is written to the Time Stamp EVI Reset bit EVR (see TIME STAMP EVI FUNCTION). The Reset value X depends on the voltage on the EVI pin at POR. Because EHL = 0 at POR, the low level is regarded as an External Event Interrupt. If X = 1, a LOW level was detected on EVI pin. If X = 0, no LOW level was detected on EVI pin.							

27h – TS EVI 100th Seconds

This register holds a recorded External Event Time Stamp of the 100th Seconds register, in two binary coded decimal (BCD) digits. The values are from 00 to 99.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
27h	TS EVI 100 th Seconds	R	80	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	TS EVI 100 th Seconds	00 to 99	Holds a recorded External Event Time Stamp of the 100 th Seconds register, coded in BCD format. Depending on the setting of the EVOW bit, it contains the time stamp of the first or last occurred event. The TS EVI 100 th Seconds register is reset to 00h when 1 is written to the Time Stamp EVI Reset bit EVR (see TIME STAMP EVI FUNCTION).							

28h – TS EVI Seconds

This register holds a recorded External Event Time Stamp of the Seconds register, in two binary coded decimal (BCD) digits. The values are from 00 to 59.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
28h	TS EVI Seconds	R	○	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	○	0	Read only. Always 0.							
6:0	TS EVI Seconds	00 to 59	Holds a recorded External Event Time Stamp of the Seconds register, coded in BCD format. Depending on the setting of the EVOW bit, it contains the time stamp of the first or last occurred event. The TS EVI Seconds register is reset to 00h when 1 is written to the Time Stamp EVI Reset bit EVR (see TIME STAMP EVI FUNCTION).							

29h – TS EVI Minutes

This register holds a recorded External Event Time Stamp of the Minutes register, in two binary coded decimal (BCD) digits. The values are from 00 to 59.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
29h	TS EVI Minutes	R	○	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	○	0	Read only. Always 0.							
6:0	TS EVI Minutes	00 to 59	Holds a recorded External Event Time Stamp of the Minutes register, coded in BCD format. Depending on the setting of the EVOW bit, it contains the time stamp of the first or last occurred event. The TS EVI Minutes register is reset to 00h when 1 is written to the Time Stamp EVI Reset bit EVR (see TIME STAMP EVI FUNCTION).							

2Ah – TS EVI Hours

This register holds a recorded External Event Time Stamp of the Hours register, in two binary coded decimal (BCD) digits. Values will range from 00 to 23.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
2Ah	TS EVI Hours	R	○	○	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:6	○	0	Read only. Always 0.							
5:0	TS EVI Hours	0 to 23	Holds a recorded External Event Time Stamp of the Hours register, coded in BCD format. Depending on the setting of the EVOW bit, it contains the time stamp of the first or last occurred event. The TS EVI Hours register is reset to 00h when 1 is written to the Time Stamp EVI Reset bit EVR (see TIME STAMP EVI FUNCTION).							

2Bh – TS EVI Date

This register holds a recorded External Event Time Stamp of the Date register, in two binary coded decimal (BCD) digits. The values will range from 01 to 31.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
2Bh	TS EVI Date	R	○	○	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	X
Bit	Symbol	Value	Description							
7:6	○	0	Read only. Always 0.							
5:0	TS EVI Date	01 to 31	<p>Holds a recorded External Event Time Stamp of the Date register, coded in BCD format. Depending on the setting of the EVOW bit, it contains the time stamp of the first or last occurred event. The TS EVI Date register is reset to 00h when 1 is written to the Time Stamp EVI Reset bit EVR (see TIME STAMP EVI FUNCTION).</p> <p>The Reset value X depends on the voltage on the EVI pin at POR. Because EHL = 0 at POR, the low level is regarded as an External Event Interrupt and an External Event Time Stamp is recorded. If X = 1, a LOW level was detected on EVI pin. If X = 0, no LOW level was detected on EVI pin.</p> <p>The value 00 after POR (if EVI-Pin = HIGH), or after the reset with the EVR bit, is replaced by a valid value (01 to 31) when an External Event Time Stamp is recorded.</p>							

2Ch – TS EVI Month

This register holds a recorded External Event Time Stamp of the Month register, in two binary coded decimal (BCD) digits. The values will range from 01 to 12.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
2Ch	TS EVI Month	R	○	○	○	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	X
Bit	Symbol	Value	Description							
7:5	○	0	Read only. Always 0.							
4:0	TS EVI Month	01 to 12	<p>Holds a recorded External Event Time Stamp of the Month register, coded in BCD format. Depending on the setting of the EVOW bit, it contains the time stamp of the first or last occurred event. The TS EVI Month register is reset to 00h when 1 is written to the Time Stamp EVI Reset bit EVR (see TIME STAMP EVI FUNCTION).</p> <p>The Reset value X depends on the voltage on the EVI pin at POR. Because EHL = 0 at POR, the low level is regarded as an External Event Interrupt and an External Event Time Stamp is recorded. If X = 1, a LOW level was detected on EVI pin. If X = 0, no LOW level was detected on EVI pin.</p> <p>The value 00 after POR (if EVI-Pin = HIGH), or after the reset with the EVR bit, is replaced by a valid value (01 to 12) when an External Event Time Stamp is recorded.</p>							

2Dh – TS EVI Year

This register holds a recorded External Event Time Stamp of the Year register, in two binary coded decimal (BCD) digits. Values will range from 00 to 99.

Read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
2Dh	TS EVI Year	R	80	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	TS EVI Year	00 to 99	Holds a recorded External Event Time Stamp of the Year register, coded in BCD format. Depending on the setting of the EVOW bit, it contains the time stamp of the first or last occurred event. The TS EVI Year register is reset to 00h when 1 is written to the Time Stamp EVI Reset bit EVR (see TIME STAMP EVI FUNCTION).							

3.17. PASSWORD REGISTERS

After a Power up and the first refreshment time $t_{PREFR} = \sim 66$ ms, the Password PW registers are reset to 00h. When the password function is enabled (EEPWE = 255), the correct 32-Bit Password must be written to the Password PW registers to write to the registers with the WP convention (time, control, user RAM, configuration EEPROM and user EEPROM registers). The 32-Bit Password PW is compared with the 32 bits in the RAM mirror of the EEPROM registers (see EEPROM PASSWORD REGISTERS).

39h – Password 0

Bit 0 to 7 from 32-bit Password.
Write only. Returns 0 when read.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
39h	Password 0	W	PW [7:0]							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	PW [7:0]	00h to FFh	Bit 0 to 7 from 32-bit Password							

3Ah – Password 1

Bit 8 to 15 from 32-bit Password.
Write only. Returns 0 when read.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
3Ah	Password 1	W	PW [15:8]							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	PW [15:8]	00h to FFh	Bit 8 to 15 from 32-bit Password							

3Bh – Password 2

Bit 16 to 23 from 32-bit Password.
Write only. Returns 0 when read.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
3Bh	Password 2	W	PW [23:16]							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	PW [23:16]	00h to FFh	Bit 16 to 23 from 32-bit Password							

3Ch – Password 3

Bit 24 to 31 from 32-bit Password.
Write only. Returns 0 when read.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
3Ch	Password 3	W	PW [31:24]							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	PW [31:24]	00h to FFh	Bit 24 to 31 from 32-bit Password							

3.18. EEPROM MEMORY CONTROL REGISTERS

See also EEPROM READ/WRITE.

3Dh – EE Address

This register holds the Address used for read or write from/to a single EEPROM Memory byte.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
3Dh	EE Address	R/WP	EEADDR							
	Reset		1	1	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEADDR	00h to FFh	Address for direct read or write one EEPROM Memory byte. – Default value = C0h The default address C0h points to the first Configuration EEPROM Register (EEPROM PMU)							

3Eh – EE Data

This register holds the Data that are read from, or that are written to a single EEPROM Memory byte.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
3Eh	EE Data	R/WP	EEDATA							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEDATA	00h to FFh	Data from direct read or for direct write to one EEPROM Memory byte. – Default value = 00h							

3Fh – EE Command

This register must be written with specific values, in order to Update or Refresh all (readable/writeable) Configuration EEPROM registers or to read or write from/to a single EEPROM Memory byte.

Before using this commands, the automatic refresh function has to be disabled (EERD = 1) and the busy status bit EEbusy has to indicate that the last transfer has been finished (EEbusy = 0). The EEf flag can be used for EEPROM write access failure detection. Other values, unless 11h, 12h, 21h or 22h, should not be entered.

Write only. Returns 0 when read. Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
3Fh	EE Command	WP	EECMD							
	Reset		0	0	0	0	0	0	0	0

Bit	Symbol	Value	Description
7:0	EECMD		Commands for EEPROM Memory (see EEPROM READ/WRITE) Other values, unless 11h, 12h, 21h or 22h, should not be entered.
		11h	UPDATE (ALL CONFIGURATION RAM → EEPROM). When writing a value of 11h, data from all Configuration RAM mirror bytes (address C0h to CAh) are written (stored) into the corresponding Configuration EEPROM bytes. See also USE OF THE CONFIGURATION REGISTERS.
		12h	REFRESH (ALL CONFIGURATION EEPROM → RAM). When writing a value of 12h, data from all Configuration EEPROM bytes are read and copied into the corresponding Configuration RAM mirror bytes (address C0h to CAh). Functions become active as soon as the RAM bytes are written.
		21h	WRITE TO ONE EEPROM BYTE (EEDATA (RAM) → EEPROM). When writing a value of 21h, data from the EEDATA (RAM) byte are written (stored) into the EEPROM byte with the address specified in the EEADDR byte. For Configuration EEPROM bytes (address C0h to CAh) and User EEPROM bytes (address CBh to EAh).
		22h	READ ONE EEPROM BYTE (EEPROM → EEDATA (RAM)). When writing a value of 22h, data from the EEPROM byte with the address specified in EEADDR byte are read and copied into the EEDATA (RAM) byte. For Configuration EEPROM bytes (address C0h to CAh) and User EEPROM bytes (address CBh to EAh).

3.19. RAM REGISTERS**40h to 4Fh – User RAM**

16 Bytes of User RAM for general purpose storage are provided. For example, they can be used to store system status bytes.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
40h to 4Fh	User RAM	R/WP	16 Bytes of User RAM. – Default values are 00h							

3.20. CONFIGURATION EEPROM WITH RAM MIRROR REGISTERS

All **Configuration EEPROM** registers at addresses C0h to CAh are memorized in the EEPROM and mirrored in the RAM. Functions become active as soon as the RAM mirror bytes are written. See also USE OF THE CONFIGURATION REGISTERS.

3.20.1. EEPROM PMU REGISTER

C0h – EEPROM Power Management Unit (PMU)

This register is used to control the switchover function, the trickle charger with charge pump and it holds the NCLKE bit (see PROGRAMMABLE CLOCK OUTPUT).

After a Power up and the first refreshment time $t_{PREFR} = \sim 66$ ms, the EEPROM PMU register value is copied from the EEPROM to the corresponding RAM mirror. The default value preset on delivery is 00h.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
C0h	EEPROM PMU	R/WP	-	NCLKE	BSM		TCR		TCM	
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	-	0	Bit not implemented. Will return a 0 when read.							
6	NCLKE	Not CLKOUT Enable bit (see PROGRAMMABLE CLOCK OUTPUT) (synchronized enable/disable)								
		0	CLKOUT is directly enabled. – Default value on delivery							
1		CLKOUT pin is LOW, if not enabled by the interrupt driven clock output (CLKF = 0) (see also INTERRUPT CONTROLLED CLOCK OUTPUT).								
5:4	BSM	Backup Switchover Mode (see AUTOMATIC BACKUP SWITCHOVER FUNCTION, AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION and TRICKLE CHARGER WITH CHARGE PUMP) To read/write from/to the EEPROM, the user has to disable the Backup Switchover function by setting the BSM field to 00 or 11 (see routine in EEPROM READ/WRITE CONDITIONS)								
		00	Switchover Disabled. – Default value on delivery							
		01	Enables the Direct Switching Mode (DSM). Switchover when $V_{DD} < V_{BACKUP}$ (PMU selects pin with the greater voltage (V_{DD} or V_{BACKUP})).							
		10	Enables the Level Switching Mode (LSM). Switchover when $V_{DD} < V_{TH,LSM}$ (2.0 V) AND $V_{BACKUP} > V_{TH,LSM}$ (2.0 V). When $V_{DD} < V_{TH,LSM}$ (2.0 V), PMU is in DSM Mode.							
11	Switchover Disabled.									
3:2	TCR	Trickle Charger Series Resistance (see TRICKLE CHARGER WITH CHARGE PUMP)								
		00	TCR 0.6 k Ω – Default value on delivery							
		01	TCR 2 k Ω							
		10	TCR 7 k Ω							
11	TCR 12 k Ω									
1:0	TCM	Trickle Charger Mode (see TRICKLE CHARGER WITH CHARGE PUMP)								
		00	Trickle Charger off. – Default value on delivery							
		01	TCM 1.75 V <ul style="list-style-type: none"> In DSM Mode (BSM = 01), V_{DD} voltage is selected. In LSM Mode (BSM = 10), the internal regulated voltage with the typical value of 1.75 V is selected (CeraCharge™ mode). ⁽¹⁾ 							
		10	TCM 3.0 V <ul style="list-style-type: none"> In LSM Mode (BSM = 10), the internal charge pump voltage with the typical value of 3.0 V is selected. ⁽¹⁾ 							
11	TCM 4.5 V <ul style="list-style-type: none"> In LSM Mode (BSM = 10), the internal charge pump voltage with the typical value of 4.5 V is selected. ⁽¹⁾ 									
⁽¹⁾ In LSM Mode (BSM = 10), the TCM voltage levels 1.75 V, 3.0 V or 4.5 V are only generated when $V_{DD} > V_{TH,LSM}$ (maximum 2.2 V).										

3.20.2. EEPROM OFFSET REGISTER

C1h – EEPROM Offset

This register holds the OFFSET value for aging correction of the frequency and the PORIE and VLIE bits to enable interrupt output.

After a Power up and the first refreshment time $t_{PREFR} = \sim 66$ ms, the EEPROM Offset register value is copied from the EEPROM to the corresponding RAM mirror. The default value preset on delivery is 00h.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
C1h	EEPROM Offset	R/WP	PORIE	VLIE	OFFSET					
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	PORIE	Power On Reset Interrupt Enable bit (see POWER ON RESET INTERRUPT FUNCTION)								
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin when a Power On Reset occurs or the signal is cancelled on $\overline{\text{INT}}$ pin. – Default value on delivery							
1	An interrupt signal is generated on $\overline{\text{INT}}$ pin when a Power On Reset occurs. This setting is retained until the PORF flag is cleared to 0 (no automatic cancellation).									
6	VLIE	Voltage Low Interrupt Enable bit (see VOLTAGE LOW INTERRUPT FUNCTION)								
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin when a Voltage Low event occurs or the signal is cancelled on $\overline{\text{INT}}$ pin. – Default value on delivery							
1	An interrupt signal is generated on $\overline{\text{INT}}$ pin when a Voltage Low event occurs. This setting is retained until the VLF flag is cleared to 0 (no automatic cancellation).									
5:0	OFFSET	-32 to +31	The amount of the effective frequency offset. This is a two's complement number with a range of -32 to +31 adjustment steps (maximum correction range is roughly ± 7.4 ppm). The correction value of one LSB corresponds to $1/(32768 \times 128) = 0.2384$ ppm. – Default value on delivery is 0 (see AGING CORRECTION).							
OFFSET	Unsigned decimal	Signed decimal (two's complement)	Offset value in ppm ^(*)							
011111	31	31	7.391							
011110	30	30	7153							
:	:	:	:							
000001	1	1	0.238							
000000 (default)	0	0	0.000							
111111	63	-1	-0.238							
111110	62	-2	-0.477							
:	:	:	:							
100001	33	-31	-7.391							
100000	32	-32	-7.629							
^(*) Calculated with 5 decimal places ($1/(32768 \times 128) = 0.23842$ ppm) The frequency deviation measured on the CLKOUT pin can be compensated by computing the OFFSET value and writing it into the EEPROM Offset register (see AGING CORRECTION).										

3.20.3. EEPROM CLKOUT REGISTERS

The registers EEPROM Clkout 1 and EEPROM Clkout 2 hold the values HFD [12:0], OS and FD that define the frequency to be output. After a Power up and the first refreshment time $t_{\text{PREFR}} = \sim 66$ ms, the EEPROM Clkout 1 and EEPROM Clkout 2 values are copied from the EEPROM to the corresponding RAM mirror.

The programmable square wave output is available at CLKOUT pin. Operation can be activated directly by setting NCLKE bit to 0 (EEPROM C0h) or by an interrupt function (CLKF = 1) (see PROGRAMMABLE CLOCK OUTPUT).

C2h – EEPROM Clkout 1

This register holds the lower 8 bits of the HFD value. The default value preset on delivery is 00h (8192 Hz).

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
C2h	EEPROM Clkout 1	R/WP	HFD [7:0]							
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	HFD [7:0]	00h to FFh	CLKOUT Frequency Selection in HF mode (lower 8 bits). See table on next page.							

C3h – EEPROM Clkout 2

This register holds the Oscillator Selection bit, the FD value and the upper 5 bits of the HFD value. The default value preset on delivery is 00h (XTAL selected, 32.768 kHz).

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
C3h	EEPROM Clkout 2	R/WP	OS	FD		HFD [12:8]				
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	OS	Oscillator Selection (synchronized oscillator change)								
		0	XTAL mode is selected. – Default value on delivery							
		1	HF mode is selected.							
6:5	FD	00 to 11	CLKOUT Frequency Selection in XTAL mode. See table below.							
4:0	HFD [12:8]	00000 to 11111	CLKOUT Frequency Selection in HF mode (upper 5 bits). See table on next page.							
FD value	CLKOUT Frequency Selection in XTAL mode					STOP bit				
00	32.768 kHz – Default value on delivery					No effect				
01	1024 Hz ⁽¹⁾ ⁽²⁾					If STOP bit = 1, the clock output is stopped. CLKOUT remains HIGH or LOW. ⁽³⁾				
10	64 Hz ⁽¹⁾ ⁽²⁾									
11	1 Hz ⁽¹⁾ ⁽²⁾									
⁽¹⁾ 1024 Hz to 1 Hz clock pulses can be affected by compensation pulses (see TEMPERATURE COMPENSATION and AGING CORRECTION). ⁽²⁾ Current period duration of 1024 Hz to 1 Hz clock pulses are affected when writing to the Seconds register or when the ESYN bit is 1 in case of an External Event detection on EVI pin. ⁽³⁾ 1024 Hz, 64 Hz and 1 Hz are synchronously turned on and off by the STOP bit.										

HFD (13 bits), 8.192 kHz to 67.109 MHz in 8.192 kHz steps:

HFD [12:0] value	HFD in decimal	HFD + 1	CLKOUT Frequency Selection in HF mode = (HFD + 1) × 8.192 kHz	STOP bit
0000000000000	0	1	8.192 kHz – Default value on delivery	No effect. ⁽¹⁾ ⁽²⁾
0000000000001	1	2	16.384 kHz	
0000000000010	2	3	24.576 kHz	
:	:	:	:	
1100011001011	6347	6348	52.002816 MHz	
:	:	:	:	
1111111111110	8190	8191	67.100672 MHz	
1111111111111	8191	8192	67.108864 MHz	

⁽¹⁾ Clock pulses from HF mode are not affected by compensation pulses (no TEMPERATURE COMPENSATION and no AGING CORRECTION).

⁽²⁾ Current period duration of clock pulses in HF mode are not affected when writing to the Seconds register nor when the ESYN bit is 1 in case of an External Event detection on EVI pin.

3.20.4. EEPROM TEMPERATURE REFERENCE REGISTERS

The registers EEPROM TReference 0 and EEPROM TReference 1 hold the 16-bit Temperature Reference value TREF in two's complement format that is used to calibrate the readable Temperature Value TEMP in registers 0Eh and 0Fh. TREF defines the calibration steps that can be calculated. Each step introduces a deviation of 0.0078125°C. The preconfigured (Factory Calibrated) TREF value may be changed by the user (see TEMPERATURE REFERENCE ADJUSTMENT).

C4h – EEPROM TReference 0

This register holds the lower 8 bits of the 16-bit TREF value. The preconfigured (Factory Calibrated) TREF value may be changed by the user. After a Power up and the first refreshment time $t_{\text{PREFR}} = \sim 66$ ms, the EEPROM TReference 0 value is copied from the EEPROM to the corresponding RAM mirror.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
C4h	EEPROM TReference 0	R/WP	TREF [7:0]							
	Default value on delivery		Preconfigured (Factory Calibrated)							
Bit	Symbol	Value	Description							
7:0	TREF [7:0]	00h to FFh	Lower 8 bits of the TREF value.							

C5h – EEPROM TReference 1

This register holds the upper 8 bits of the 16-bit TREF value. The preconfigured (Factory Calibrated) TREF value may be changed by the user. After a Power up and the first refreshment time $t_{\text{PREFR}} = \sim 66$ ms, the EEPROM TReference 1 value is copied from the EEPROM to the corresponding RAM mirror.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
C5h	EEPROM TReference 1	R/WP	TREF [15:8]							
	Default value on delivery		Preconfigured (Factory Calibrated)							
Bit	Symbol	Value	Description							
7:0	TREF [15:8]	00h to FFh	Upper 8 bits of the TREF value.							

3.20.5. EEPROM PASSWORD REGISTERS

After a Power up and the first refreshment time $t_{PREFR} = \sim 66$ ms, the EEPROM Password registers 0 to 3 with the 32-bit EEPROM Password are copied from the EEPROM to the corresponding RAM mirror. The default values preset on delivery are 00h.

C6h – EEPROM Password 0

Bit 0 to 7 from 32-bit EEPROM Password.

EEPW registers (*WP) can be write-protected by password.

RAM mirror is Write only. Returns 0 when read. EEPROM can be READ when unlocked.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
C6h	EEPROM Password 0	*WP	EEPW [7:0]							
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEPW [7:0]	00h to FFh	Bit 0 to 7 from 32-bit EEPROM Password							

C7h – EEPROM Password 1

Bit 8 to 15 from 32-bit EEPROM Password.

EEPW registers (*WP) can be write-protected by password.

RAM mirror is Write only. Returns 0 when read. EEPROM can be READ when unlocked.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
C7h	EEPROM Password 1	*WP	EEPW [15:8]							
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEPW [15:8]	00h to FFh	Bit 8 to 15 from 32-bit EEPROM Password							

C8h – EEPROM Password 2

Bit 16 to 23 from 32-bit EEPROM Password.

EEPW registers (*WP) can be write-protected by password.

RAM mirror is Write only. Returns 0 when read. EEPROM can be READ when unlocked.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
C8h	EEPROM Password 2	*WP	EEPW [23:16]							
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEPW [23:16]	00h to FFh	Bit 16 to 23 from 32-bit EEPROM Password							

C9h – EEPROM Password 3

Bit 24 to 31 from 32-bit EEPROM Password.

EEPW registers (*WP) can be write-protected by password.

RAM mirror is Write only. Returns 0 when read. EEPROM can be READ when unlocked.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
C9h	EEPROM Password 3	*WP	EEPW [31:24]							
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEPW [31:24]	00h to FFh	Bit 24 to 31 from 32-bit EEPROM Password							

3.20.6. EEPROM PASSWORD ENABLE REGISTER

After a Power up and the first refreshment time $t_{PREFR} = \sim 66$ ms, the Password Enable value EEPWE is copied from the EEPROM to the corresponding RAM mirror. The default value preset on delivery is 00h.

CAh – EEPROM Password Enable

RAM mirror is Write only. Returns 0 when read.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
CAh	EEPROM Password Enable	WP	EEPWE							
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEPWE		EEPROM Password Enable							
		0 to 254	Password function disabled. When writing a value not equal 255, the password function is disabled. – 00h is the default value preset on delivery							
		255	Password function enabled. When writing a value of 255, the Password registers (39h to 3Ch) can be used to enter the 32-bit Password.							

3.21. USER EEPROM

CBh to EAh – User EEPROM

32 Bytes of User EEPROM for general purpose storage are provided.

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
CBh to EAh	User EEPROM	R/WP	32 Bytes of non-volatile User EEPROM. – Default values on delivery are 00h							

3.22. REGISTER RESET VALUES SUMMARY

Reset values; RAM, Address 00h to 25h:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
00h	100 th Seconds	R	0	0	0	0	0	0	0	0
01h	Seconds	R/WP	0	0	0	0	0	0	0	0
02h	Minutes	R/WP	0	0	0	0	0	0	0	0
03h	Hours	R/WP	0	0	0	0	0	0	0	0
04h	Weekday	R/WP	0	0	0	0	0	0	0	0
05h	Date	R/WP	0	0	0	0	0	0	0	1
06h	Month	R/WP	0	0	0	0	0	0	0	1
07h	Year	R/WP	0	0	0	0	0	0	0	0
08h	Minutes Alarm	R/WP	0	0	0	0	0	0	0	0
09h	Hours Alarm	R/WP	0	0	0	0	0	0	0	0
0Ah	Date Alarm	R/WP	0	0	0	0	0	0	0	0
0Bh	Timer Value 0	R/WP	0	0	0	0	0	0	0	0
0Ch	Timer Value 1	R/WP	0	0	0	0	0	0	0	0
0Dh	Status	R/WP	0	0	0	0	0	X	1	0
0Eh	Temperature LSBs	R/WP	0h → Xh				0	1 → 0	0	0
0Fh	Temperature MSBs	R	00h → XXh							
10h	Control 1	R/WP	0	0	0	0	0	0	0	0
11h	Control 2	R/WP	0	0	0	0	0	0	0	0
12h	Control 3	R/WP	0	0	0	0	0	0	0	0
13h	Time Stamp Contr.	R/WP	0	0	0	0	0	0	0	0
14h	Clock Int. Mask	R/WP	0	0	0	0	0	0	0	0
15h	EVI Control	R/WP	0	0	0	0	0	0	0	0
16h	TLow Threshold	R/WP	0	0	0	0	0	0	0	0
17h	THigh Threshold	R/WP	0	0	0	0	0	0	0	0
18h	TS TLow Count	R	0	0	0	0	0	0	0	0
19h	TS TLow Seconds	R	0	0	0	0	0	0	0	0
1Ah	TS TLow Minutes	R	0	0	0	0	0	0	0	0
1Bh	TS TLow Hours	R	0	0	0	0	0	0	0	0
1Ch	TS TLow Date	R	0	0	0	0	0	0	0	0
1Dh	TS TLow Month	R	0	0	0	0	0	0	0	0
1Eh	TS TLow Year	R	0	0	0	0	0	0	0	0
1Fh	TS THigh Count	R	0	0	0	0	0	0	0	0
20h	TS THigh Seconds	R	0	0	0	0	0	0	0	0
21h	TS THigh Minutes	R	0	0	0	0	0	0	0	0
22h	TS THigh Hours	R	0	0	0	0	0	0	0	0
23h	TS THigh Date	R	0	0	0	0	0	0	0	0
24h	TS THigh Month	R	0	0	0	0	0	0	0	0
25h	TS THigh Year	R	0	0	0	0	0	0	0	0

X = not defined, or defined under conditions.

Reset values; RAM, Address 26h to FFh:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
26h	TS EVI Count	R	0	0	0	0	0	0	0	X
27h	TS EVI 100 th Secs.	R	0	0	0	0	0	0	0	0
28h	TS EVI Seconds	R	0	0	0	0	0	0	0	0
29h	TS EVI Minutes	R	0	0	0	0	0	0	0	0
2Ah	TS EVI Hours	R	0	0	0	0	0	0	0	0
2Bh	TS EVI Date	R	0	0	0	0	0	0	0	X
2Ch	TS EVI Month	R	0	0	0	0	0	0	0	X
2Dh	TS EVI Year	R	0	0	0	0	0	0	0	0
2Eh to 38h	RESERVED	Prot.	00h							
39h	Password 0	W	0	0	0	0	0	0	0	0
3Ah	Password 1	W	0	0	0	0	0	0	0	0
3Bh	Password 2	W	0	0	0	0	0	0	0	0
3Ch	Password 3	W	0	0	0	0	0	0	0	0
3Dh	EE Address	R/WP	1	1	0	0	0	0	0	0
3Eh	EE Data	R/WP	0	0	0	0	0	0	0	0
3Fh	EE Command	WP	0	0	0	0	0	0	0	0
40h to 4Fh	User RAM (16 Bytes)	R/WP	00h							
50h to BFh	RESERVED	Prot.	00h							
CBh to FFh	RESERVED	Prot.	00h							

X = not defined, or defined under conditions.

Default values on delivery; **Configuration EEPROM** with RAM mirror, Address C0h to CAh:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
C0h	EEPROM PMU	R/WP	0	0	0	0	0	0	0	0
C1h	EEPROM Offset	R/WP	0	0	0	0	0	0	0	0
C2h	EEPROM Clkout 1	R/WP	0	0	0	0	0	0	0	0
C3h	EEPROM Clkout 2	R/WP	0	0	0	0	0	0	0	0
C4h	EEPROM TReference 0	R/WP	Preconfigured (Factory Calibrated)							
C5h	EEPROM TReference 1	R/WP	Preconfigured (Factory Calibrated)							
C6h	EEPROM Password 0	*WP	0	0	0	0	0	0	0	0
C7h	EEPROM Password 1	*WP	0	0	0	0	0	0	0	0
C8h	EEPROM Password 2	*WP	0	0	0	0	0	0	0	0
C9h	EEPROM Password 3	*WP	0	0	0	0	0	0	0	0
CAh	EEPROM PW Enable	WP	0	0	0	0	0	0	0	0

Default values on delivery; **User EEPROM**, Address CBh to EAh:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
CBh to EAh	User EEPROM (32 Bytes)	R/WP	00h							

RV-3032-C7 reset values after power on (RAM) and default values on delivery (EEPROM) sorted by functions:

RAM, reset values:

Time (hh:mm:ss.00)	=	00:00:00.00	(100 th Seconds = read only)
Date (YY-MM-DD)	=	00-01-01	
Weekday	=	0	
TS TLow Count	=	0	(read only)
TS TLow Time (hh:mm:ss)	=	00:00:00	(read only)
TS TLow Date (YY-MM-DD)	=	00-00-00	(read only)
TS THigh Count	=	0	(read only)
TS THigh Time (hh:mm:ss)	=	00:00:00	(read only)
TS THigh Date (YY-MM-DD)	=	00-00-00	(read only)
TS EVI Count	=	X	(read only)
		(if X = 1, LOW level was detected. Else X = 0)	
TS EVI Time (hh:mm:ss.00)	=	00:00:00.00	(read only)
TS EVI Date (YY-MM-DD)	=	00-XX-XX	(read only)
		(if XX-XX = 01-01, LOW level was detected. Else XX-XX = 00-00)	
Alarm function	=	disabled, because AE_D = 0 = enabled and Date Alarm value = 00h = not valid	
Timer function	=	disabled, Timer Clock Frequency = 4096 Hz	
Update function	=	disabled, second update is selected	
Temperature value TEMP	=	000h → XXXh (read only)	
Temperature Low function	=	disabled, TLow Threshold = 0°C	
Temperature High function	=	disabled, THigh Threshold = 0°C	
External Event function	=	falling edge is regarded as External Event on pin EVI	
Time Stamp Temp. Low	=	disabled, first event is selected	
Time Stamp Temp. High	=	disabled, first event is selected	
Time Stamp Ext. Event	=	first event is selected	
Backup Switchover Interrupt	=	disabled (for enabling, see EEPROM)	
Interrupts	=	disabled (RAM enabled interrupts), see also Configuration EEPROM	
EEPROM Memory Refresh	=	enabled	
EEbusy status bit	=	1 → 0 (1 for the time $t_{PREFR} = \sim 66$ ms, then it cleared to 0 automatically) (read only)	
STOP bit function	=	disabled (prescaler not stopped)	
ESYN bit function	=	disabled (no time synchronization by External Event)	
THF Flag	=	0	
TLF Flag	=	0	
UF Flag	=	0	
TF Flag	=	0	
AF Flag	=	0	
EVF Flag	=	X	(X = 1 when LOW level was detected on EVI pin, else X = 0)
PORF Flag	=	1	(can be cleared by writing 0 to the bit)
VLF Flag	=	0	
EEF Flag	=	0	
CLKF Flag	=	0	
BSF Flag	=	0	
Interrupt Controlled Clock	=	disabled, no interrupt source selected, CLKOUT delay disabled, delay time $t_{I2C:CLK} = 1.4$ ms selected, no interrupt delay	
Password PW	=	00000000h (write only)	
EE Address	=	C0h (points to EEPROM PMU)	
EE Data	=	00h	
EE Command	=	00h (write only)	
User RAM	=	00h (16 Bytes)	

Configuration EEPROM with RAM mirror, default values on delivery:

Backup Switchover function	=	disabled	(for Interrupt, see RAM)
Power On Reset Interrupt	=	disabled	
Voltage Low Interrupt	=	disabled	
Interrupts	=	disabled	(EEPROM enabled interrupts), see also RAM
Trickle Charger Mode	=	disabled	TCR 0.6 k Ω is selected
OFFSET value	=	0	(6 bits)
CLKOUT	=	enabled	XTAL mode selected, F = 32.768 kHz
TREF value	=	Preconfigured Value	(16 bits) (may be changed by the user)
EEPROM Password EEPW	=	00000000h	(write only) (EEPROM readable when unlocked)
EEPROM Password Enable	=	disabled	(write only)

User EEPROM, default values on delivery:

User EEPROM (32 Bytes)	=	00h
------------------------	---	-----

4. DETAILED FUNCTIONAL DESCRIPTION

4.1. POWER ON RESET (POR)

The power on reset (POR) is generated at start-up (see POWER ON RESET INTERRUPT FUNCTION). All RAM registers including the Counter Registers are initialized to their reset values and the Configuration EEPROM registers with the RAM mirror registers are set to their preset default values. At power up a refresh of the RAM mirror values by the values in the Configuration EEPROM is automatically generated. The time of this first refreshment is $t_{\text{PREFR}} = \sim 66 \text{ ms}$ (see REGISTER RESET VALUES SUMMARY).

The Power On Reset Flag PORF set to 1 indicates that a V_{DD} startup from below the V_{POR} falling edge threshold (TYP 0.95 V) occurred in the VDD Power state, thereby generating a device POR. A PORF value of 1 indicates that the time information is corrupted. The value 1 is retained until a 0 is written by the user.

When PORIE bit (EEPROM C1h) is set and the PORF flag was cleared beforehand, an interrupt signal on $\overline{\text{INT}}$ pin can be generated when a Power On Reset occurs (see POWER ON RESET INTERRUPT FUNCTION)

Hint: Resetting the PORF flag is actually not required to get a POR interrupt on $\overline{\text{INT}}$ pin as the flag is automatically reset when V_{DD} falls below V_{POR} (TYP 0.95 V) and is set again when V_{DD} crosses the V_{POR} rising edge threshold (TYP 1.0 V) at startup. A POR interrupt is carried out in any case.

4.2. AUTOMATIC BACKUP SWITCHOVER FUNCTION

Basic Hardware Definitions:

- The RV-3032-C7 has two power supply pins.
 - V_{DD} is the main power supply input pin.
 - V_{BACKUP} is the backup power supply input pin.
- $V_{TH:LSM}$ (typical 2.0 V) is the backup switchover threshold voltage in Level Switching Mode.
- A debounce logic provides a debounce time t_{DEB} which will filter V_{DD} oscillation when switchover function will switch back from V_{BACKUP} to V_{DD} . I²C access is again possible in VDD Power state (and if $V_{DD} \geq 1.4$ V) after the debounce time t_{DEB} .
 - $t_{DEB\ MAX} = 1$ ms, when internal voltage was always above V_{LOW} (typical 1.2 V). VLF = 0.
 - $t_{DEB\ MAX} = 1000$ ms, when internal voltage was between V_{LOW} (typical 1.2 V) and V_{POR} (maximum 1.05 V). VLF = 1. See also BACKUP AND RECOVERY AC ELECTRICAL CHARACTERISTICS.

Backup Switchover Modes:

The RV-3032-C7 has three Backup Switchover Modes. The desired mode can be selected by the BSM field in the Configuration EEPROM, see EEPROM PMU REGISTER:

- BSM = 00 Switchover disabled (default value on delivery), see SWITCHOVER DISABLED.
- BSM = 01 Direct Switching Mode (DSM), see DIRECT SWITCHING MODE (DSM).
 - If $V_{DD} < V_{BACKUP}$, switchover occurs from V_{DD} to V_{BACKUP} .
- BSM = 10 Level Switching Mode (LSM), see LEVEL SWITCHING MODE (LSM).
 - If $V_{BACKUP} > V_{TH:LSM}$ (typical 2.0 V) AND $V_{DD} < V_{TH:LSM}$ (typical 2.0 V), switchover occurs from V_{DD} to V_{BACKUP} .
 - If $V_{DD} < V_{TH:LSM}$ (typical 2.0 V), the module is automatically in DSM Mode.
- BSM = 11 Switchover disabled, see SWITCHOVER DISABLED.

Function Overview:

When a valid backup switchover condition occurs (Direct or Level Switching Mode) and the internal power supply switches to the V_{BACKUP} voltage (VBACKUP Power state) the following sequence applies:

- The Backup Switch Flag BSF is set, see AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION.
 - If BSIE = 1 (register 12h), an interrupt will be generated on \overline{INT} pin and remains as long as BSF is not cleared to 0 (can be cleared when back in VDD Power state).
 - If BSIE = 0, no interrupt will be generated.
- The I²C-bus interface is automatically disabled (high impedance) and reset.
- The External Event function is disabled.
- CLKOUT pin is held LOW.

For the VBACKUP Power state, the following applies:

- Temperature sensing and temperature compensation remains active.
- The interrupt output on \overline{INT} pin still works. If the interrupt is to be used, a pull-up resistor to V_{BACKUP} is required.
- Any previously configured interrupt selected in the Clock Interrupt Mask Register (14h) can be used to enable the clock output on CLKOUT pin automatically (clock output when back in VDD Power state) (see AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION).
- The TLow and THigh Time Stamp functions still work (the Time Stamp registers can be read when back in VDD Power state).
- The EVI Time Stamp function does not work, because the EVI function is disabled.

4.2.1.SWITCHOVER DISABLED

The switchover function is disabled when BSM field (EEPROM C0h) is set to 00 or 11 (BSM = 00 is the default value on delivery).

1. Used when only one power supply is available (device is always in V_{DD} Power state). The power supply is applied on V_{DD} pin and the V_{BACKUP} pin must be tied to V_{SS} with a 10 kΩ resistor. The Backup Switch Flag BSF is always logic 0.
2. Used when V_{DD} is turned off and V_{BACKUP} is still present and the device must not draw any current from the backup source (I_{BACKUP} = 0 nA). The backup source on V_{BACKUP} pin is in standby mode until the device is powered up again from main supply V_{DD} and a Backup Switchover Mode is selected (see also TYPICAL CHARACTERISTICS).

When the device is first powered up from the backup supply (V_{BACKUP}) but without a main supply (V_{DD}), switchover is also disabled and the backup source is automatically in standby mode (I_{BACKUP} = 0 nA).

4.2.2.DIRECT SWITCHING MODE (DSM)

This mode is selected with BSM = 01 (EEPROM C0h).

- If V_{DD} > V_{BACKUP} the internal power supply is V_{DD}.
- If V_{DD} < V_{BACKUP} the internal power supply is V_{BACKUP}.


Direct Switching Mode is useful in systems where the supply voltage V_{DD} is known to be higher than V_{BACKUP}:

- This is the case when charging a rechargeable backup source on V_{BACKUP} (e.g. a supercapacitor) via the internal trickle charger with the charge-pump disabled. The charging voltage reached at V_{BACKUP} is always lower than the supply voltage V_{DD}.
- Do not use if the backup source on V_{BACKUP} is a primary battery with a specified nominal voltage equal to or close to the supply voltage V_{DD}. For example, new 3 V lithium coin cell batteries can have a voltage of up to 3.6 V. With V_{DD} = 3 V or 3.3 V this can lead to unwanted switching.

See also OPERATING PARAMETERS and TYPICAL CHARACTERISTICS.

Note that the circuit needs t_{SWA} = 2 ms in the worst case to react when changing from disabled switchover to DSM.

Backup switchover in Direct Switching Mode and Backup Switchover Interrupt enabled, BSIE = 1 (register 12h):

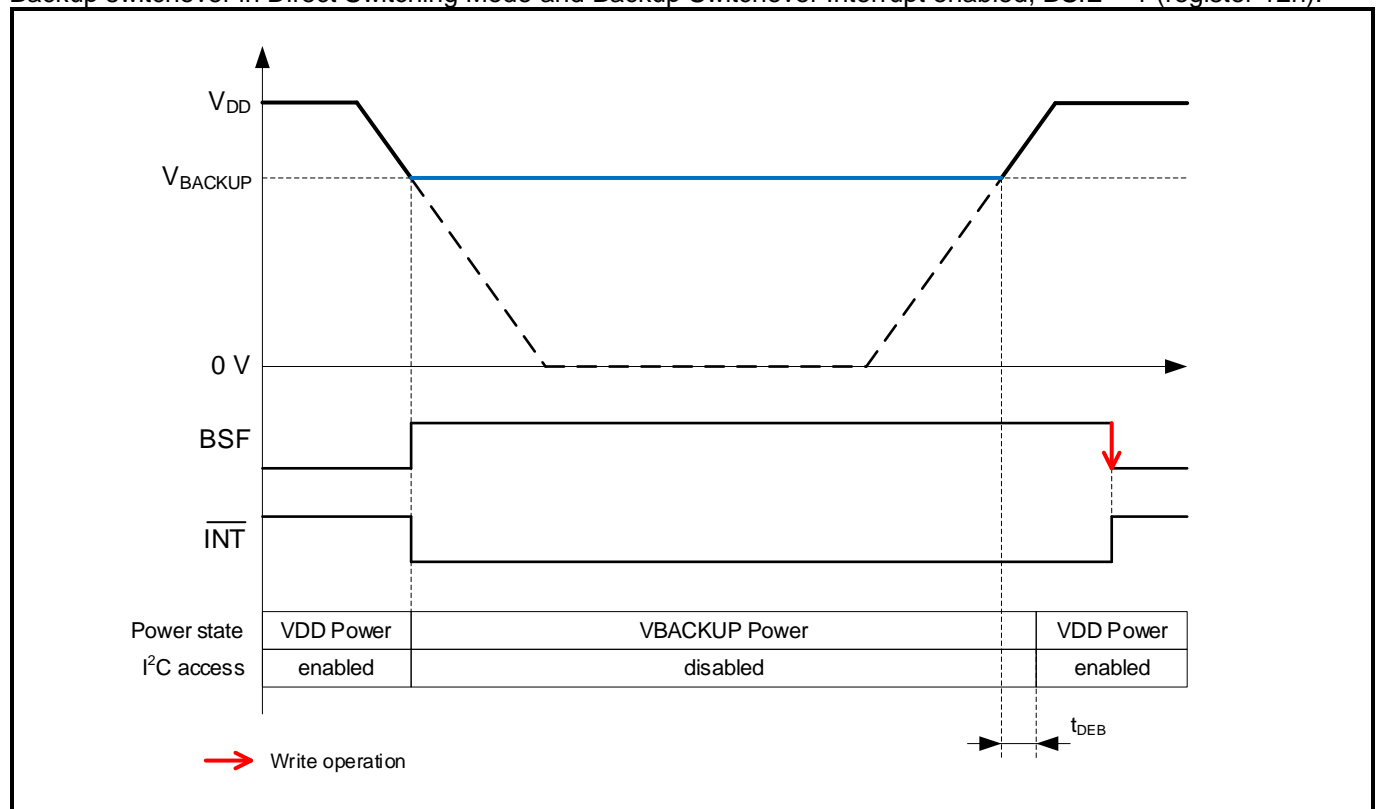

4.2.3.LEVEL SWITCHING MODE (LSM)


This mode is selected with BSM = 10 (EEPROM C0h).

- If $V_{DD} > V_{TH:LSM}$ (typical 2.0 V), the internal power supply is V_{DD} .
- If $V_{BACKUP} > V_{TH:LSM}$ (typical 2.0 V) AND $V_{DD} < V_{TH:LSM}$ (typical 2.0 V), the internal power supply is V_{BACKUP} .
- If $V_{DD} < V_{TH:LSM}$ (typical 2.0 V), the module is automatically in DSM Mode (see DIRECT SWITCHING MODE (DSM)).

In Level Switching Mode, the power consumption is slightly increased compared to the Direct Switching Mode (DSM) because V_{DD} is monitored and compared to the threshold voltage $V_{TH:LSM} = \text{typical } 2.0 \text{ V}$ (typical $I_{DD:LSM} = 230 \text{ nA}$). See also OPERATING PARAMETERS and TYPICAL CHARACTERISTICS.

Note that the circuit needs $t_{SWA} = 10 \text{ ms}$ in the worst case to react when changing from disabled switchover to LSM.

Backup switchover in Level Switching Mode and Backup Switchover Interrupt enabled, BSIE = 1 (register 12h):

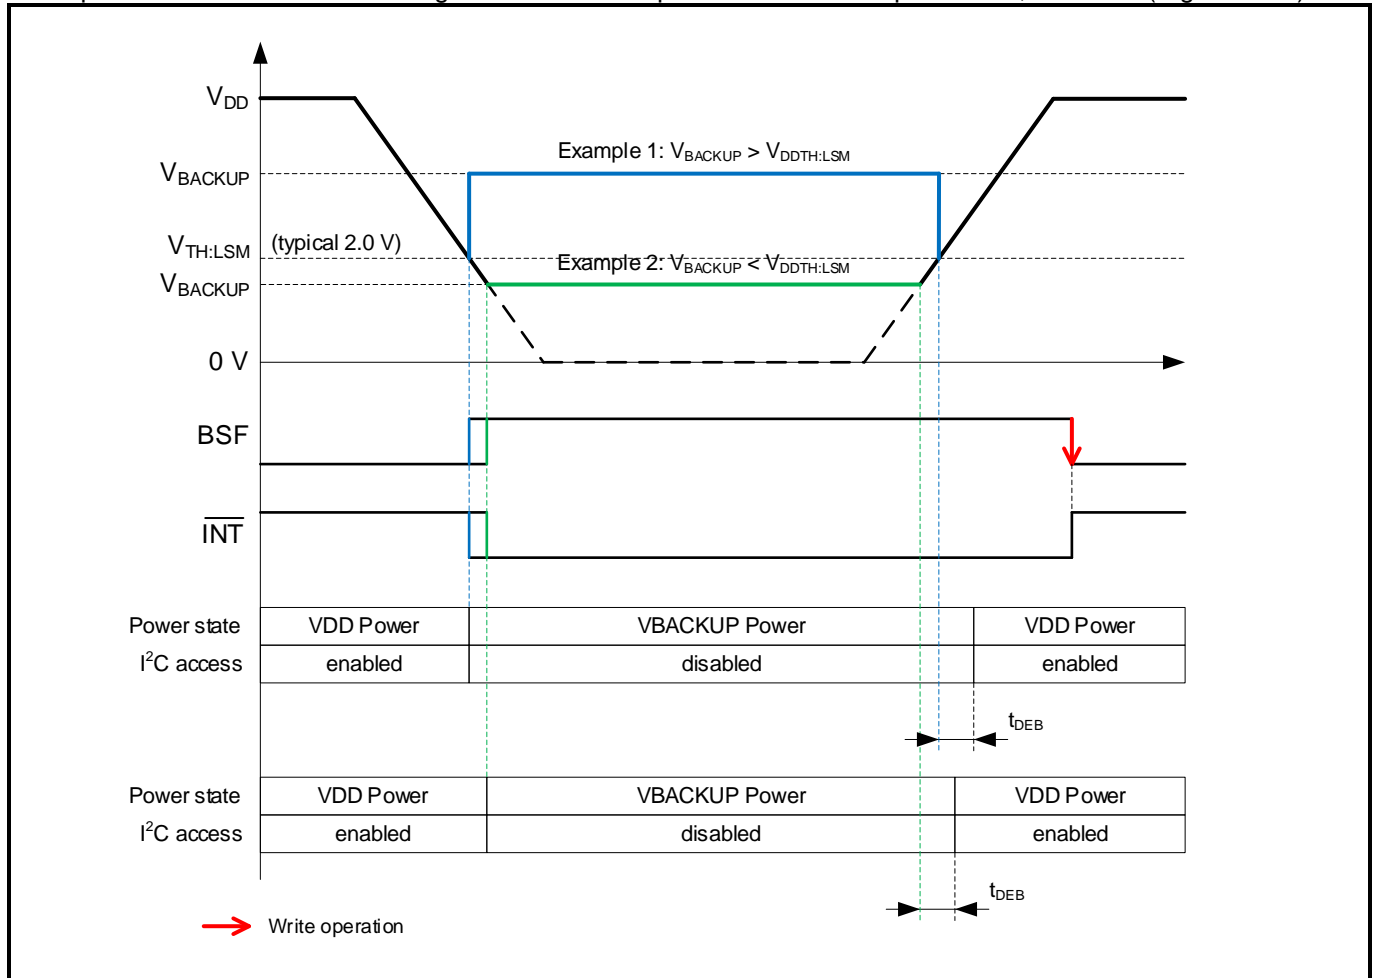

4.3. TRICKLE CHARGER WITH CHARGE PUMP


The device supporting the V_{BACKUP} pin include a trickle charging circuit with charge pump which allows a battery or supercapacitor connected to the V_{BACKUP} pin to be charged:

- direct from the power supply connected to the V_{DD} pin
- or by the internal regulated voltage TCM 1.75 V (for TDK's CeraCharge™)
- or by one of the internal charge pump voltages TCM 3.0 V or TCM 4.5 V. See figure below.

In the register EEPROM C0h the Trickle Charger with Charge Pump can be configured by the TCM field (default value on delivery is "Trickle Charger off") and by the TCR field for selecting a series current limiting resistor (default value on delivery is 0.6 kΩ). A schottky diode, with a typical voltage drop of 0.25 V, is inserted in the charging path. The internal charge pump voltages are useful when using a supercapacitor, as it permits to charge the capacitor to a higher voltage than V_{DD} . No external components required.

Note that the trickle voltage levels 1.75 V, 3.0 V or 4.5 V are only available when LSM Mode (BSM = 10) is selected and $V_{\text{DD}} > V_{\text{TH:LSM}}$ (maximum 2.2 V).

Trickle Charger with Charge Pump:

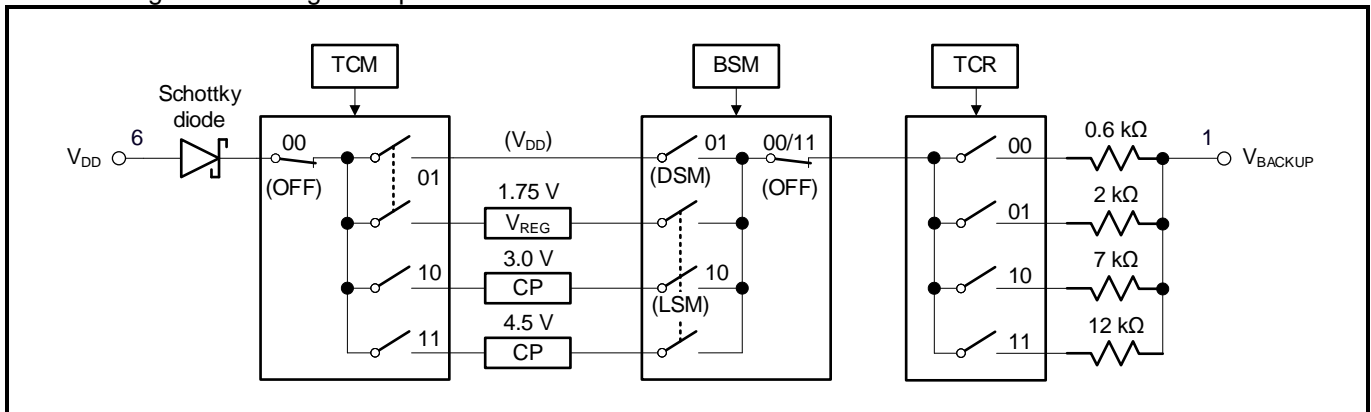

The trickle charger is disabled when TCM = 00 or when Switchover function is disabled (BSM = 00 or 11) or when the device is in V_{BACKUP} Power state.

4.4. PROGRAMMABLE CLOCK OUTPUT

The Oscillator Selection bit OS (EEPROM C3h) can be used to select the XTAL mode or the HF mode.

In XTAL mode (OS bit = 0) four frequencies can be output on CLKOUT pin, the frequency selection is done in the FD field (EEPROM C3h).

- 32.768 kHz; direct from Xtal oscillator, not temperature compensated and not offset compensated.
- 1024 Hz, 64 Hz, 1 Hz; divided Xtal oscillator frequencies, always temperature compensated and with aging compensation with user programmable EEPROM Offset value (EEPROM C1h).

In HF mode (OS bit = 1) frequencies from 8192 Hz to 67.109 MHz in 8192 Hz steps can be output on CLKOUT pin, the frequency selection is done in the HFD field (EEPROM C2h and C3h).

- The frequencies are not temperature compensated and not offset compensated.

The frequency output can be controlled directly via the I²C-bus interface commands (normal operation) or can be interrupt driven to allow waking up an external system by supplying a clock.

CLKOUT is tied to V_{SS} in V_{BACKUP} Power state independent of the CLKOUT configuration settings.

After POR, and if the default values on delivery in the Configuration EEPROM with RAM mirror have not changed, the 32.768 kHz frequency is output to CLKOUT pin since FD = 00, OS = 0 (EEPROM C3h) and NCLKE = 0 (EEPROM C0h). To customize these POR values, the user can change the values in the Configuration EEPROM.

See also EEPROM READ/WRITE.

4.4.1.XTAL CLKOUT FREQUENCY SELECTION

A programmable XTAL square wave is available at pin CLKOUT when OS = 0 (EEPROM C3h). Operation is controlled by the FD field (EEPROM C3h). Frequencies from 32.768 kHz (default value on delivery) to 1 Hz can be generated for use as a system clock, microcontroller clock, input to a charge pump, or for calibration of the crystal oscillator.

Pin CLKOUT is a push-pull output that is enabled at power on (default value on delivery). CLKOUT can be disabled by setting NCLKE bit to 1 when not enable by an Interrupt function (CLKIE = 0 and CLKF = 0). When disabled, the CLKOUT pin is LOW.

The STOP bit function can affect the CLKOUT signal depending on the selected frequency. When STOP = 1, the clock output of 1024 Hz, 64 Hz or 1 Hz are stopped (for more details, STOP BIT FUNCTION).

When writing to the Seconds register or when the ESYN bit is 1 in case of an External Event detection on EVI pin the current period duration of 1024 Hz to 1 Hz clock pulses are affected.

XTAL CLKOUT Frequency Selection:

FD value	CLKOUT Frequency Selection in XTAL mode	STOP bit
00	32.768 kHz – Default value on delivery	No effect
01	1024 Hz ⁽¹⁾ ⁽²⁾	If STOP bit = 1, the clock output is stopped. CLKOUT remains HIGH or LOW. ⁽³⁾
10	64 Hz ⁽¹⁾ ⁽²⁾	
11	1 Hz ⁽¹⁾ ⁽²⁾	
⁽¹⁾ 1024 Hz to 1 Hz clock pulses can be affected by compensation pulses (see TEMPERATURE COMPENSATION and AGING CORRECTION). ⁽²⁾ Current period duration of 1024 Hz to 1 Hz clock pulses are affected when writing to the Seconds register or when the ESYN bit is 1 in case of an External Event detection on EVI pin. ⁽³⁾ 1024 Hz, 64 Hz and 1 Hz are synchronously turned on and off by the STOP bit.		

4.4.2.HF CLKOUT FREQUENCY SELECTION

A programmable HF square wave is available at pin CLKOUT when OS = 1 (EEPROM C3h). Operation is controlled by the HFD field (EEPROM C2h and C3h). Frequencies from 8192 Hz to 67.109 MHz in 8192 Hz steps can be generated for use as a system clock, microcontroller clock or for input to a charge pump.

Pin CLKOUT is a push-pull output that is enabled at power on (default value on delivery). CLKOUT can be disabled by setting NCLKE bit to 1 when not enable by an Interrupt function (CLKIE = 0 and CLKF = 0). When disabled, the CLKOUT pin is LOW.

HF CLKOUT Frequency Selection:

HFD [12:0] value	HFD in decimal	HFD + 1	CLKOUT Frequency Selection in HF mode = (HFD + 1) × 8.192 kHz	STOP bit
0000000000000	0	1	8.192 kHz – Default value on delivery	No effect. ⁽¹⁾ ⁽²⁾
0000000000001	1	2	16.384 kHz	
0000000000010	2	3	24.576 kHz	
:	:	:	:	
1100011001011	6347	6348	52.002816 MHz	
:	:	:	:	
1111111111110	8190	8191	67.100672 MHz	
1111111111111	8191	8192	67.108864 MHz	
⁽¹⁾ Clock pulses from HF mode are not affected by compensation pulses (no TEMPERATURE COMPENSATION and no AGING CORRECTION). ⁽²⁾ Current period duration of clock pulses in HF mode are not affected when writing to the Seconds register nor when the ESYN bit is 1 in case of an External Event detection on EVI pin.				

4.4.3. CLKOUT FREQUENCY TRANSITIONS

Two applications can be considered: On the one hand the switching on and off of a preselected frequency, on the other hand the change of frequency when CLKOUT is enabled.

CLKOUT on/off (FD, HFD and OS unchanged):

- With NCLKE bit. Synchronous on/off.
 - FD = 1024 Hz, turn-off delay time of between 0 and one extra period (967 μ s)
 - FD = 32768 Hz, turn-on delay time of about 600 μ s, and turn-off delay time of about 400 μ s
 - HFD frequencies have a turn-on delay time of 2.5 ms, and a turn-off delay time of 400 μ s
- Or by CLKF flag. Synchronous on/off. Same behavior as with bit NCLKE.

CLKOUT frequency change with OS (FD and HFD unchanged, CLKOUT on):

- FD \rightarrow HFD. Synchronous change. About 350 μ s old frequency, 2.3 ms CLKOUT = LOW, then new frequency.
- HFD \rightarrow FD. Synchronous change. About 300 μ s old frequency, 650 μ s CLKOUT = LOW, then LOW until next positive edge of the new frequency.

Hint: Do not change the old frequency at the same time when changing OS bit (register EEPROM C3h).

CLKOUT frequency change with FD or HFD (OS unchanged, CLKOUT on):

- With FD (XTAL mode). Immediate frequency change.
- With HFD (HF mode). Immediate frequency change. Not recommended as the new frequency is not stable for the first few milliseconds. The better way is to stop the clock, change the frequency, and start the clock again (for example, with bit NCLKE).

4.4.4. NORMAL CLOCK OUTPUT

Normal clock output is controlled by the NCLKE bit (EEPROM C0h). When NCLKE is set to 0 (default), the square wave output is enabled on the CLKOUT pin. When NCLKE bit is set to 1, the CLKOUT pin is LOW, if not enabled by the interrupt driven clock output (CLKF = 0).

4.4.5. INTERRUPT CONTROLLED CLOCK OUTPUT

To use interrupt controlled clock output, NCLKE (EEPROM C0h) has to be set to 1 (CLKOUT not directly enabled). When CLKIE bit (11h) is set to 1 the occurrence of the interrupt selected in the Clock Interrupt Mask Register 14h (CEIE, CAIE, CTIE, CUIE, CTHIE or CTLIE) allows the flag CLKF to be set and the square wave output on the CLKOUT pin. This function allows waking up an external system (MCU) by outputting a clock.

Writing 0 to CLKIE will disable new interrupts from driving frequencies on CLKOUT, but if there is already an active interrupt driven frequency output (CLKF flag is set), the active frequency output will not be stopped. When CLKF flag is cleared, the CLKOUT pin is LOW.

- An Interrupt Delay after CLKOUT-on can be enabled with bit INTDE (14h). Used when waking up an MCU. See INTERRUPT DELAY AFTER CLKOUT ON.
- A CLKOUT switch off delay after I²C STOP can be selected and enabled by bits CLKD and CLKDE (registers 14h and 15h). Used if the MCU wants to put itself into sleep mode. See CLKOUT OFF DELAY AFTER I²C STOP.

Caution, it is possible that the MCU can put into sleep mode without a valid interrupt function enabled that could wake it up again.

4.4.6. INTERRUPT DELAY AFTER CLKOUT ON

When using INTERRUPT CONTROLLED CLOCK OUTPUT an Interrupt Delay after CLKOUT On can be enabled with bit INTDE (14h). Used when waking up an MCU.

Applicable only when NCLKE bit (EEPROM C0h) is set to 1 (CLKOUT not directly enabled) and for all activated interrupt functions with the appropriate clock output bit in register 14h enabled (CEIE, CAIE, CTIE, CUIE, CTHIE or CTLIE).

- When INTDE = 0, no delay is added (default value).
- When INTDE = 1, the delay time $t_{CLK:INT}$ of 1/256 seconds to 3/512 seconds \approx 3.9 ms to 5.9 ms is added.

Note that no delay can be created with the Periodic Countdown Timer Interrupt function (CTIE = 1) when TD = 00 (4096 Hz) is selected. With the other settings TD = 01, 10, 11 (64 Hz, 1 Hz, 1/60 Hz) the delay can be applied.

4.4.7. CLKOUT OFF DELAY AFTER I²C STOP

When using INTERRUPT CONTROLLED CLOCK OUTPUT a CLKOUT switch off delay after I²C STOP can be selected and enabled by bits CLKD and CLKDE (registers 14h and 15h). Used if the MCU wants to put itself into sleep mode.

Caution, it is possible that the MCU can be put into sleep mode without a valid interrupt function enabled that could wake it up again.

CLKD bit is used to select one of two delay values:


- When CLKD = 0, typical delay time $t_{I2C:CLK}$ = 1.4 ms (default value).
- When CLKD = 1, typical delay time $t_{I2C:CLK}$ = 75 ms.

To enable the CLKOUT off Delay after I²C STOP the CLKDE bit has to be set to 1.

- When CLKDE = 0, no delay (default value).
- When CLKDE = 1, delay is enabled. The delay time is according to bit CLKD.


4.4.8.CLOCK OUTPUT SCHEME

Clock output scheme:

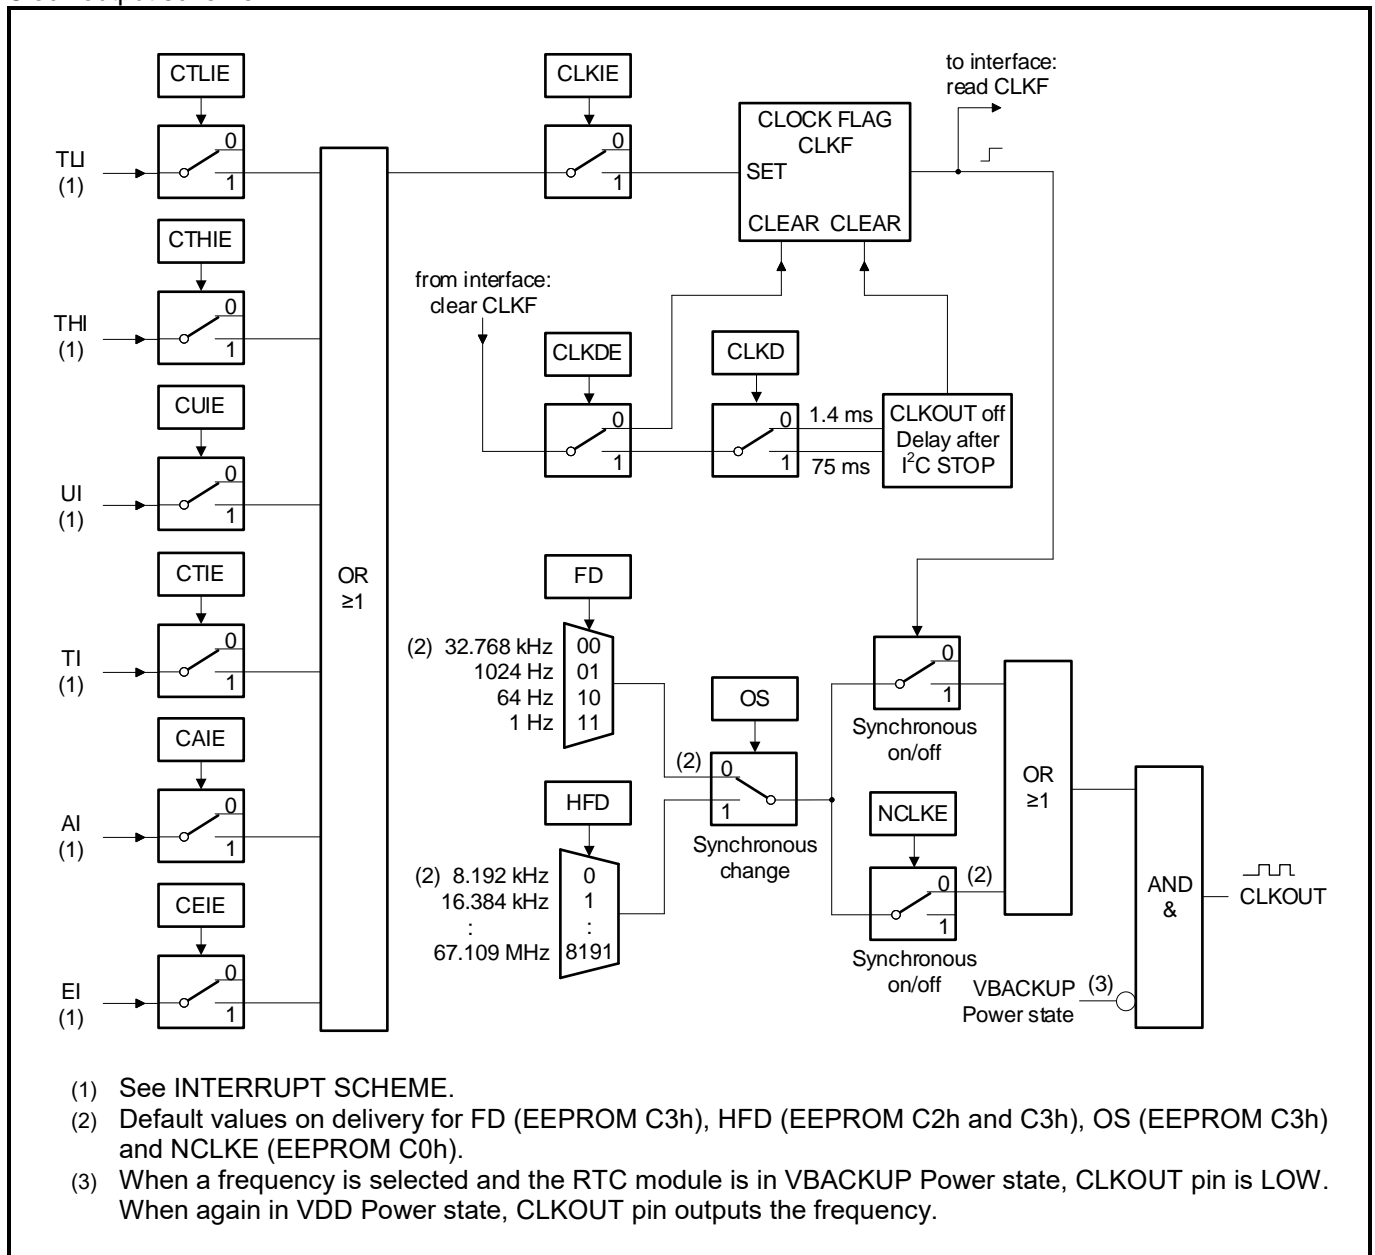

4.5. SETTING AND READING THE TIME

Data flow and data dependencies starting from the 1 Hz clock tick:

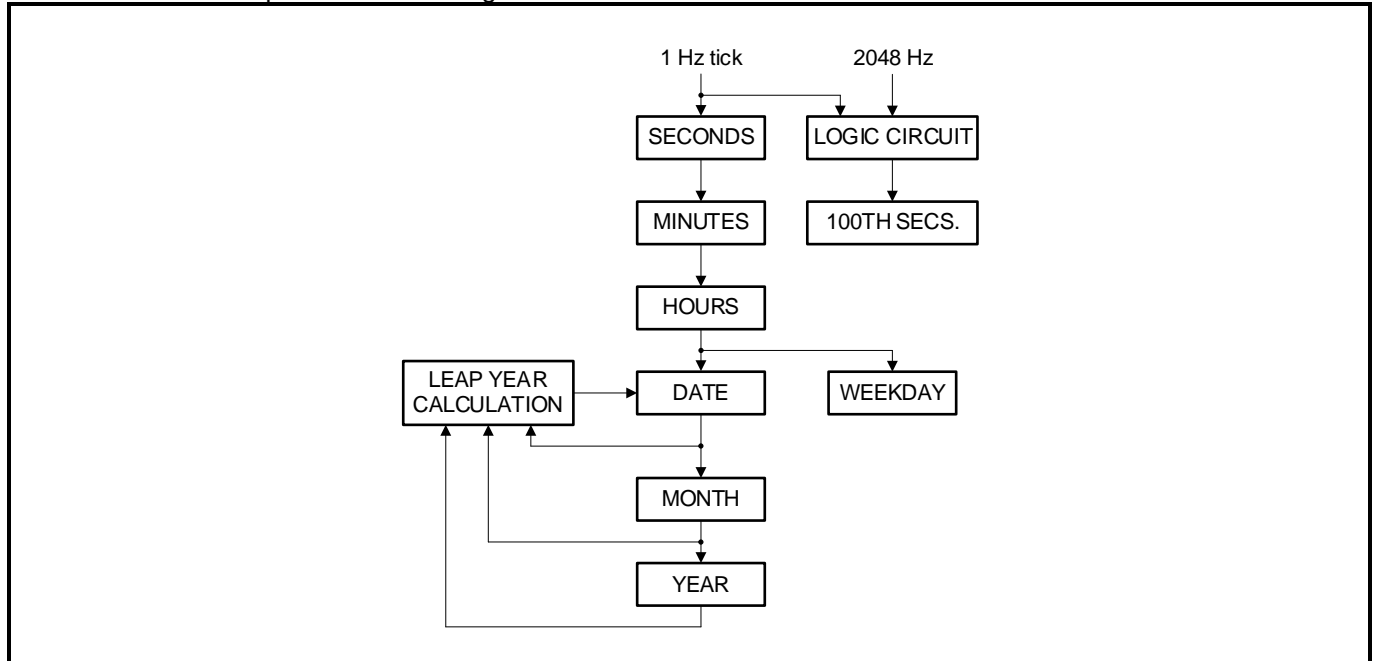


During an I²C read/write access to any RTC register that takes less than 950 milliseconds, the time counters (clock and calendar registers 01h to 07h, but not the 100th Seconds register 00h) of the RV-3032-C7 are blocked. During this time the clock counter increment (1 Hz tick) is inhibited to allow coherent data values. One counter increment (maximum one 1 Hz tick) occurring during inhibition time is memorized and will be realized after the I²C STOP condition.

Exception: If during the inhibition time 0 and then 1 is written to the STOP bit or in case of an External Event when ESYN = 1 or a value is written to the Seconds register a possible currently memorized 1 Hz update is reset and the prescaler frequencies from 4096 Hz to 1 Hz are reset. Resetting the prescaler will have an influence on the length of the current clock period on all subsequent peripherals (clock and calendar, XTAL CLKOUT, timer clock, update timer clock, temperature sensing and EVI input filter), (see TIME SYNCHRONIZATION).

When I²C read/write access has been terminated within 950 milliseconds (t < 950 ms), the time counters are unblocked with the I²C STOP condition and a pending request to increment the time counters that occurred during read or write access is correctly applied. Maximum one 1 Hz tick can be handled (see following Figure).

Access time for read/write operations:

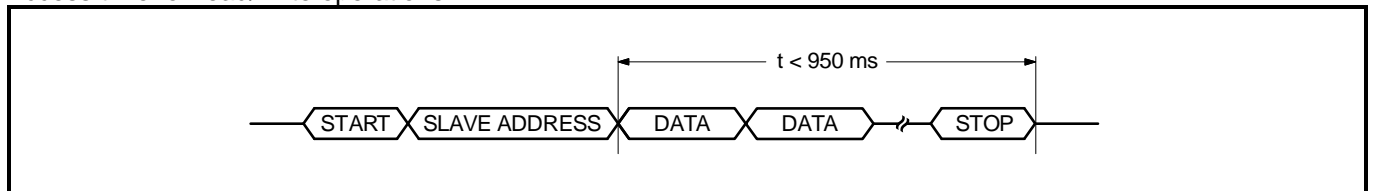

Because of this method, it is very important to make a read or write access in one go, that is, setting or reading Seconds register through to Year register should be made in one single access. Failing to comply with this method could result in the time becoming corrupted.

Hint: If the 100th Seconds register is read as part of the counter burst (and the 100th Seconds value is either 00 or 99), all time counters should be read two or three times until it is verified that two readings are the same value and guaranteed to be correct.

4.5.1.SETTING THE TIME

During an I²C read/write access to any RTC register with an access time of less than 950 ms, the time counters (but not the 100th Seconds register) are blocked. After I²C STOP condition a possibly memorized 1 Hz tick is realized. Note that when writing to the Seconds register the 100th Seconds register value is cleared to 00.

Advantage of register blocking:

- Prevents faulty writing to the clock and calendar registers during an I²C write access (no incrementing of time registers during the write access).
- After writing, one memorized 1 Hz tick is handled. Clock and calendar are updated.
- No reading is needed for control. The written data are coherent.

If the I²C write access takes longer than 950 ms the I²C bus interface is reset by the internal bus timeout function. In this case the previous time counter values are maintained, the pending 1 Hz tick is realized and the clock counter increment (1 Hz tick) continues to operate normally. Restarting of communications begins with transfer of the START condition again.

The I²C auto increment Address Pointer is not reset by the I²C STOP condition nor by the internal stop forced after timeout.

Two methods for setting the time can be distinguished:

1. Setting the time registers including Seconds register. Writing to the Seconds register resets a possible currently memorized 1 Hz update and resets the prescaler frequencies from 4096 Hz to 1 Hz (synchronization).
2. Setting the time registers without Seconds register. A possibly memorized 1 Hz tick during write access will be realized. Old synchronicity persists.

Hint: Instead of writing to the Seconds register to synchronize the time counters the STOP Bit function or the ESYN Bit function can be applied. Both functions do not change the value in the Seconds register, but they also reset the prescaler frequencies from 4096 Hz to 1 Hz (see TIME SYNCHRONIZATION).

4.5.2.READING THE TIME

During an I²C read/write access to any RTC register with an access time of less than 950 ms, the time counters (but not the 100th Seconds register) are blocked. After I²C STOP condition a possibly memorized 1 Hz tick is realized.

Advantage of register blocking:

- Prevents faulty reading of the clock and calendar registers during an I²C read access (no incrementing of time registers during the read access).
- After reading, one memorized 1 Hz tick is handled. Clock and calendar are updated.
- No second reading is needed for control. The read data are coherent.

If the I²C read access takes longer than 950 ms the I²C bus interface is reset by the internal bus timeout function. In this case, all subsequently read data has the value FFh, the pending 1 Hz tick is realized and the clock counter increment (1 Hz tick) continues to operate normally. Restarting of communications begins with transfer of the START condition again.

The I²C auto increment Address Pointer is not reset by the I²C STOP condition nor by the internal stop forced after timeout.

4.6. EEPROM READ/WRITE

The following registers and bits are related to the EEPROM read/write functions:

- EE Address Register (3Dh) (see EEPROM MEMORY CONTROL REGISTERS)
- EE Data Register (3Eh) (see EEPROM MEMORY CONTROL REGISTERS)
- EE Command Register (3Fh) (see EEPROM MEMORY CONTROL REGISTERS)
- EE flag and EEbusy status bit (see TEMPERATURE REGISTERS, 0Eh – Temperature LSBs)
- EERD bit (see CONTROL REGISTERS, 10h – Control 1)

4.6.1.POR REFRESH (ALL CONFIGURATION EEPROM → RAM)

Automatic read of all Configuration EEPROM registers at Power On Reset (POR):

- At power up a refresh of the Configuration RAM mirror values by the values in the Configuration EEPROM is automatically generated (see REGISTER RESET VALUES SUMMARY).
- The time of this first refreshment is $t_{PREFR} = \sim 66$ ms.
- The EEbusy bit in the register Temperature LSBs (0Eh) can be used to monitor the status of the refreshment.

4.6.2.AUTOMATIC REFRESH (ALL CONFIGURATION EEPROM → RAM)

Read all Configuration EEPROM registers automatically:

- To keep the integrity of the configuration data, all data of the Configuration RAM are refreshed by the data in the Configuration EEPROM each 24 hours, at date increment (at the beginning of the last second before midnight).
- The time of this automatic refreshment is $t_{AREFR} = \sim 1.4$ ms.
- Refresh is only active when RV-3032-C7 is not in VBACKUP Power state and not disabled by EERD (EEPROM Memory Refresh Disable) bit.
- Hint: It is not always necessary/meaningful to turn off the auto-refresh (EERD = 1) before an EEPROM access. e.g. if the current RTC time is 01 hour, etc.

4.6.3.UPDATE (ALL CONFIGURATION RAM → EEPROM)

Write to all Configuration EEPROM registers (see also USE OF THE CONFIGURATION REGISTERS):

- Before starting to change the configuration stored in the EEPROM, the auto refresh of the registers from the EEPROM has to be disabled by writing 1 into the EERD control bit in the Control 1 register.
- Then the new configuration can be written into the configuration RAM registers, when the whole new configuration is in the registers, writing the command 11h into the register EECMD will start the copy of the configuration into the EEPROM.
- The time of the update is $t_{UPDATE} = \sim 46$ ms.
- When the transfer is finished (EEbusy = 0), the user can enable again the auto refresh of the registers by writing 0 into the EERD bit.
- The EE flag in the register Temperature LSBs (0Eh) can be used for EEPROM write access failure detection.

4.6.4.REFRESH (ALL CONFIGURATION EEPROM → RAM)

Read all Configuration EEPROM registers:

- Before starting to read the configuration stored in the EEPROM, the auto refresh of the registers from the EEPROM has to be disabled by writing 1 into the EERD control bit in the Control 1 register.
- Then the actual configuration can be read from the Configuration EEPROM registers, writing the command 12h into the register EECMD will start the copy of the configuration into the RAM.
- The time of this controlled refreshment is $t_{REFR} = \sim 1.4$ ms.
- Functions become active as soon as the RAM bytes are written.
- When the transfer is finished (EEbusy = 0), the user can enable again the auto refresh of the registers by writing 0 into the EERD bit.

4.6.5. WRITE TO ONE EEPROM BYTE (EEDATA (RAM) → EEPROM)

Write to one EEPROM byte of the Configuration EEPROM or User EEPROM registers:

- Before starting to change data stored in the EEPROM, the auto refresh of the registers from the EEPROM has to be disabled by writing 1 into the EERD control bit in the Control 1 register.
- In order to write a single byte to the EEPROM, the address to which the data must be written is entered in the EEADDR register and the data to be written is entered in the EEDATA register, then the command 21h is written in the EECMD register to start the EEPROM write.
- The time to write to one EEPROM byte is $t_{WRITE} = \sim 4.8$ ms.
- When the transfer is finished (EEbusy = 0), the user can enable again the auto refresh of the registers by writing 0 into the EERD bit.
- The EEf flag in the register Temperature LSBs (0Eh) can be used for EEPROM write access failure detection.

4.6.6. READ ONE EEPROM BYTE (EEPROM → EEDATA (RAM))

Read one EEPROM byte from Configuration EEPROM or User EEPROM registers:

- Before starting to read a byte in the EEPROM, the auto refresh of the registers from the EEPROM has to be disabled by writing 1 into the EERD control bit in the Control 1 register.
- In order to read a single byte from the EEPROM, the address to be read is entered in the EEADDR register, then the command 22h is written in the EECMD register and the resulting byte value can be read from the EEDATA register.
- The time to read one EEPROM byte is $t_{READ} = \sim 1.1$ ms.
- When the transfer is finished (EEbusy = 0), the user can enable again the auto refresh of the registers by writing 0 into the EERD bit.


4.6.7.EEBUSY BIT

The set EEBusy status bit (bit 2 in the Temperature LSBs register, 0Eh) indicates that the EEPROM is currently handling a read or write request and will ignore any further commands until the current one is finished. At power up a refresh is automatically generated. The time of this first refreshment is $t_{PREFR} = \sim 66$ ms. After the refreshment is finished; EEBusy is cleared to 0 automatically. The cleared EEBusy status bit indicates that the EEPROM transfer is finished.

To prevent access collision between the internal automatic EEPROM refresh cycle (EERD = 0) and external EEPROM read/write access through interface the following procedures have to be applied.

- Set EERD = 1 Automatic EEPROM Refresh needs to be disabled before EEPROM access.
- Check for EEBusy = 0 Access EEPROM only if not busy.
- Write EEPROM For example, wait 10 ms after each written EEPROM register before checking for EEBusy = 0 to allow internal data transfer (for Read EEPROM, wait, e.g. 1 ms).
- Clear EERD = 0 It is recommended to enable Automatic EEPROM Refresh at the end of read/write access.

EEBusy bit flowcharts (examles):

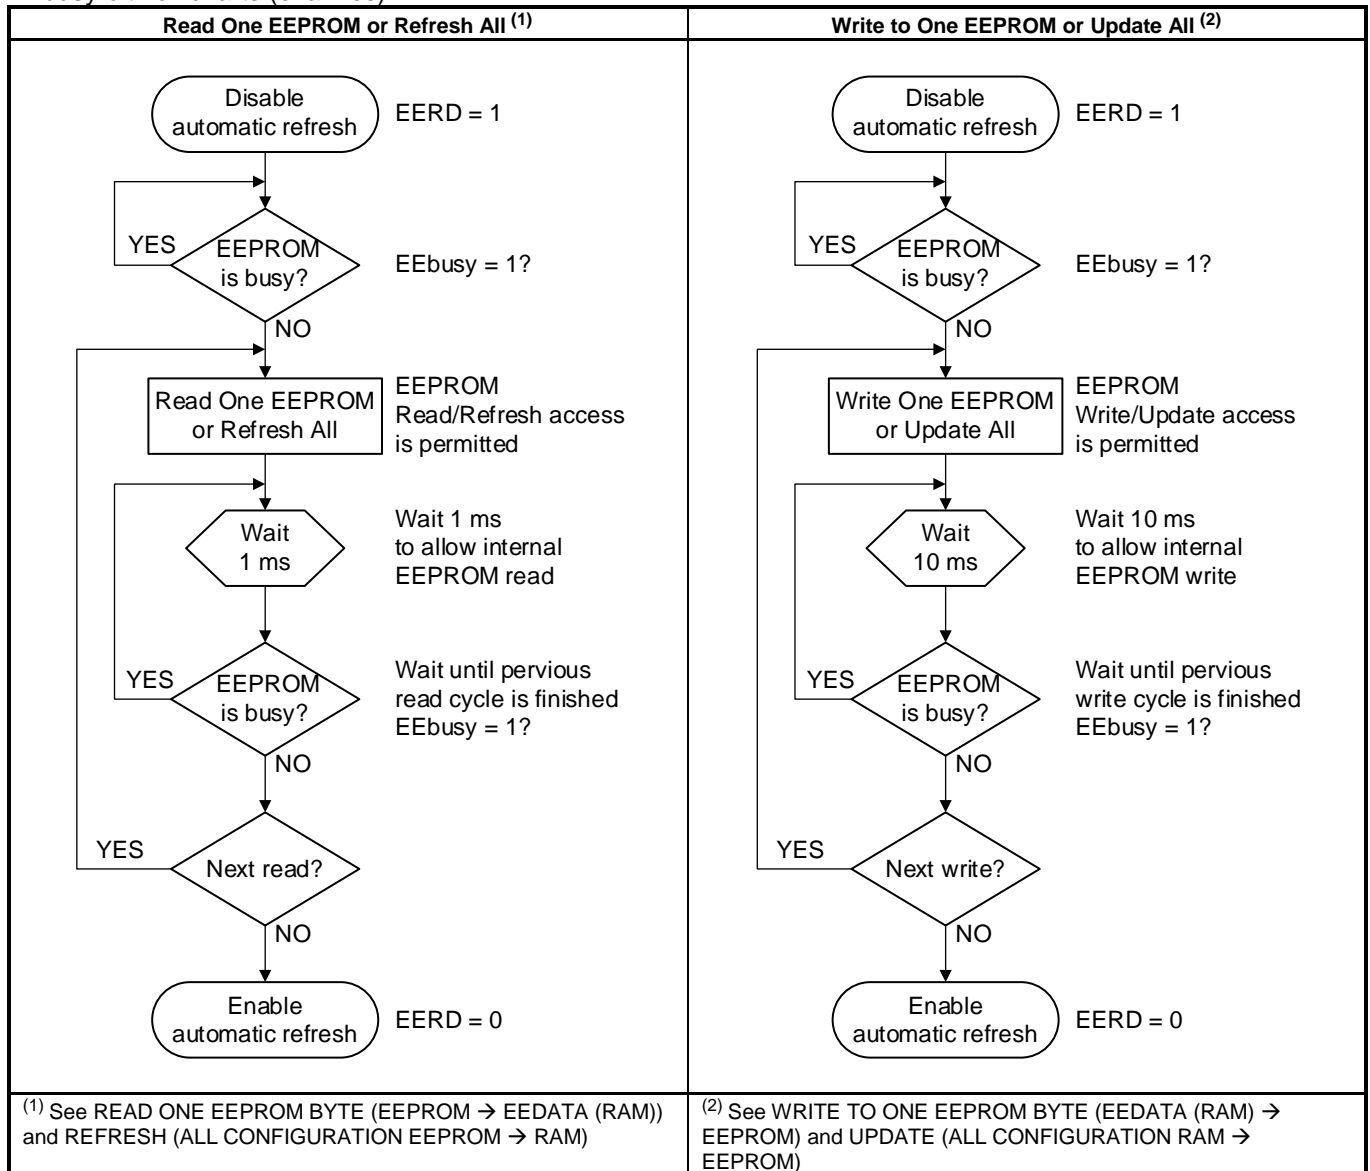

Note: A minimum power supply voltage of $V_{DD:WRITE} = 1.6$ V during the whole EEPROM write procedure is required; i.e. until EEBusy = 0.

4.6.8.EEF FLAG

The set EEF flag (bit 3 in the Temperature LSBs register, 0Eh) indicates that the EEPROM write access has failed because power supply voltage V_{DD} has dropped below $V_{DD:EEF}$. The maximum $V_{DD:EEF} = 1.5$ volts. The value 1 is retained until a 0 is written by the user.

Note that this flag does not provide information about the EEPROM read access.

4.6.9.EEPROM READ/WRITE CONDITIONS

During a read/write of the EEPROM, if the V_{DD} supply drops, the device will continue to operate and communicate until a switchover to V_{BACKUP} occurs (in DSM or LSM Mode). It is not recommended to operate during this time and all I²C communication should be halted as soon as V_{DD} failure is detected.


During the time that data is being written to the EEPROM, V_{DD} should remain above the minimum write voltage $V_{DD:WRITE} = 1.6$ V. If at any time V_{DD} drops below this voltage, the data written to the device get corrupted (EEF set when $V_{DD} < V_{DD:EEF}$).

To write to the EEPROM, the backup switchover circuit must switch back to the main power supply V_{DD} . See also AUTOMATIC BACKUP SWITCHOVER FUNCTION.

4.6.10. USE OF THE CONFIGURATION REGISTERS

The best practice method to use the Configuration EEPROM with RAM mirror registers at addresses C0h to CAh is to make all Configuration settings in the RAM mirror first and then to update all Configuration EEPROMs by the Update EEPROM command.

Update all Configuration EEPROMs:

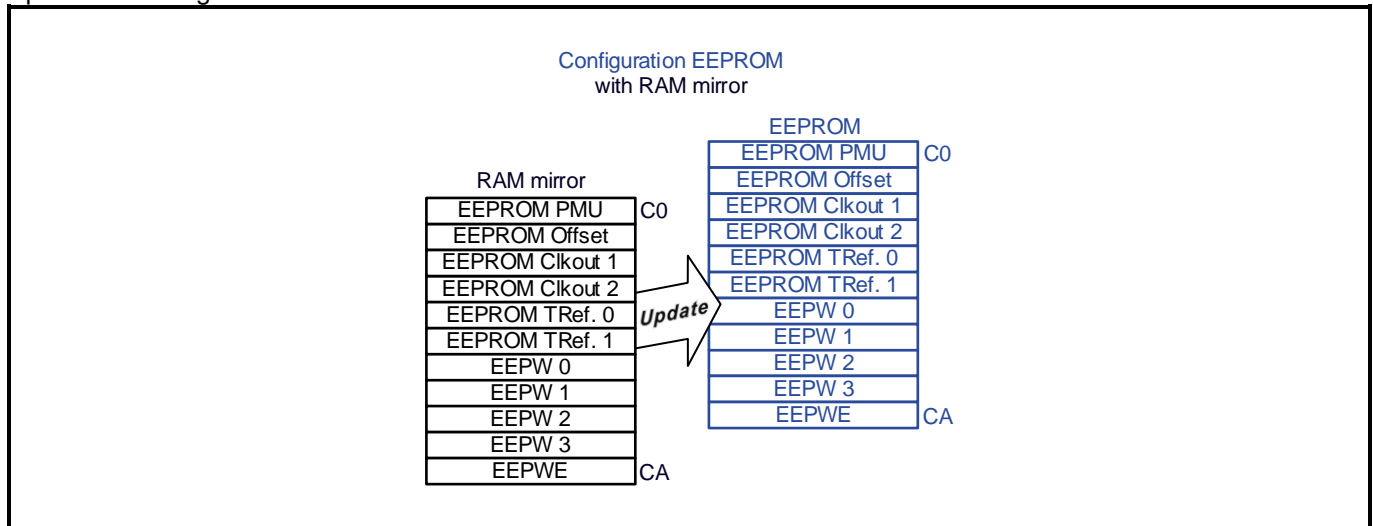

The method, how to enable/disable write protection and how to change the reference password can be found in section USER PROGRAMMABLE PASSWORD (Configuration Registers C6h to CAh).

Configuration Registers C0h to C5h:

- EEPROM PMU REGISTER, C0h – EEPROM PMU
- EEPROM OFFSET REGISTER, C1h – EEPROM Offset
- EEPROM CLKOUT REGISTERS, C2h – EEPROM Clkout 1
- EEPROM CLKOUT REGISTERS, C3h – EEPROM Clkout 2
- EEPROM TEMPERATURE REFERENCE REGISTERS, C4h – EEPROM TReference 0
- EEPROM TEMPERATURE REFERENCE REGISTERS, C5h – EEPROM TReference 1

Edit the Configuration settings (example, when write protection is enabled (EEPWE = 255)):

1. Enter the correct password PW (PW = EEPW) to unlock write protection
2. Disable automatic refresh by setting EERD = 1
3. Edit Configuration settings in registers C0h to C5h (RAM)
4. Update EEPROM (all Configuration RAM → EEPROM) by setting EECMD = 11h
5. Enable automatic refresh by setting EERD = 0
6. Enter an incorrect password PW (PW ≠ EEPW) to lock the device

Note: RAM mirror of the Configuration registers defines the active zone. By writing only to the EEPROM, the configurations are not active. The configurations are activated as soon as a refresh occurs (POR refresh, Automatic refresh or Refresh by software).

Note: To perform certain tests, it is sufficient to use only the RAM mirror. But the new, changed configurations are lost as soon as a refresh occurs (POR refresh, Automatic refresh or Refresh by software).

4.7. INTERRUPT OUTPUT

The interrupt output pin $\overline{\text{INT}}$ can be triggered by nine different functions:

- PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION
- PERIODIC TIME UPDATE INTERRUPT FUNCTION
- ALARM INTERRUPT FUNCTION
- EXTERNAL EVENT INTERRUPT FUNCTION
- TEMPERATURE LOW INTERRUPT FUNCTION
- TEMPERATURE HIGH INTERRUPT FUNCTION
- AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION
- POWER ON RESET INTERRUPT FUNCTION
- VOLTAGE LOW INTERRUPT FUNCTION

Note that the interrupt output pin $\overline{\text{INT}}$ also works in VBACKUP Power state (except for the External Event function which is disabled).


4.7.1. SERVICING INTERRUPTS

The $\overline{\text{INT}}$ pin can indicate nine types of interrupts. It outputs the logic OR operation result of these interrupt outputs. When an interrupt is detected (when $\overline{\text{INT}}$ pin produces a negative pulse or is at low level), the TF, UF, AF, TLF, THF, EVF, VLF, BSF and PORF flags can be read to determine which interrupt event has occurred.


To keep $\overline{\text{INT}}$ pin from changing to low level, clear the TIE, UIE, AIE, EIE, TLIE, THIE, BSIE, PORIE and VLIE bits. Bits PORIE and VLIE are located in the EEPROM register C1h. To check whether an event has occurred without outputting any interrupts via the $\overline{\text{INT}}$ pin, software can read the TF, UF, AF, EVF, TLF, THF, BSF, PORF and VLF interrupt flags (polling).

4.7.2. INTERRUPT SCHEME


Interrupt Scheme (part 1/3):

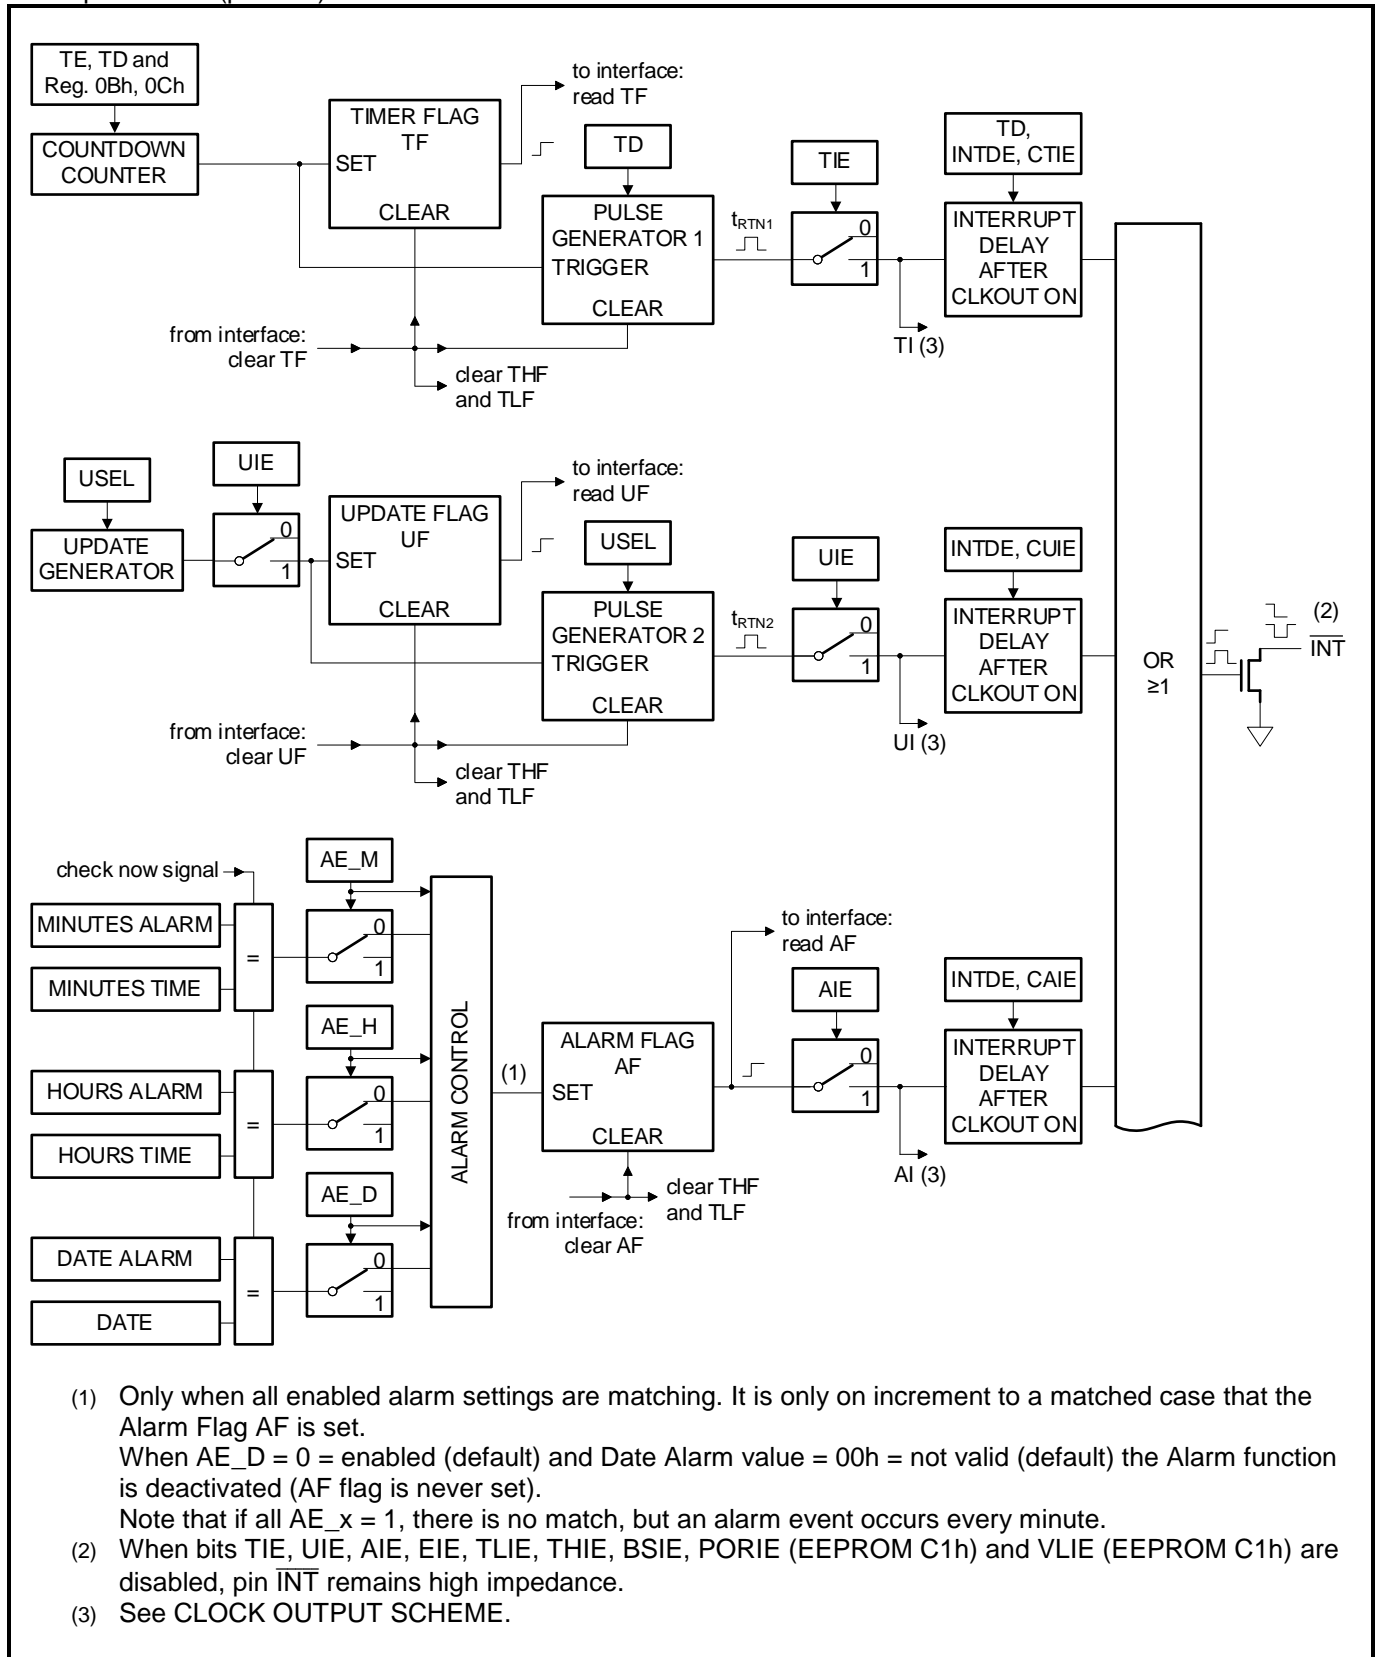

Interrupt Scheme (part 2/3):

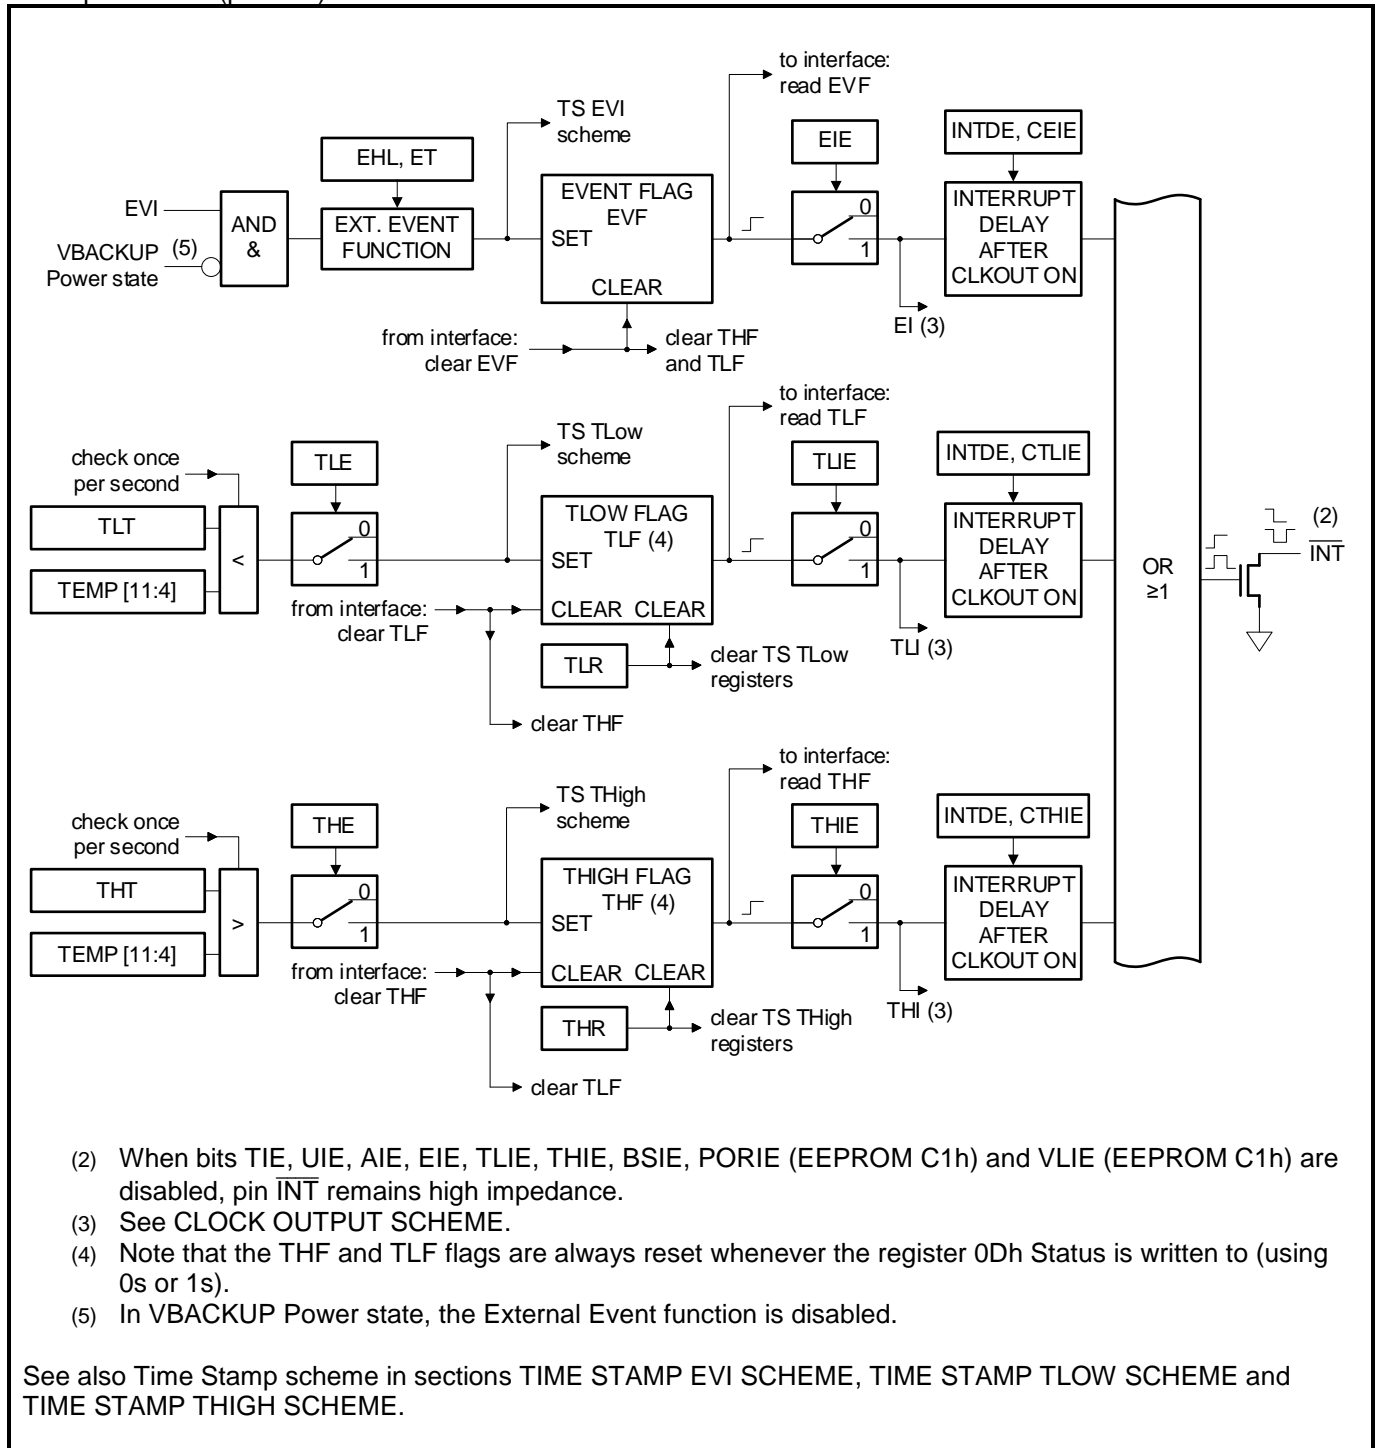

Interrupt Scheme (part 3/3):

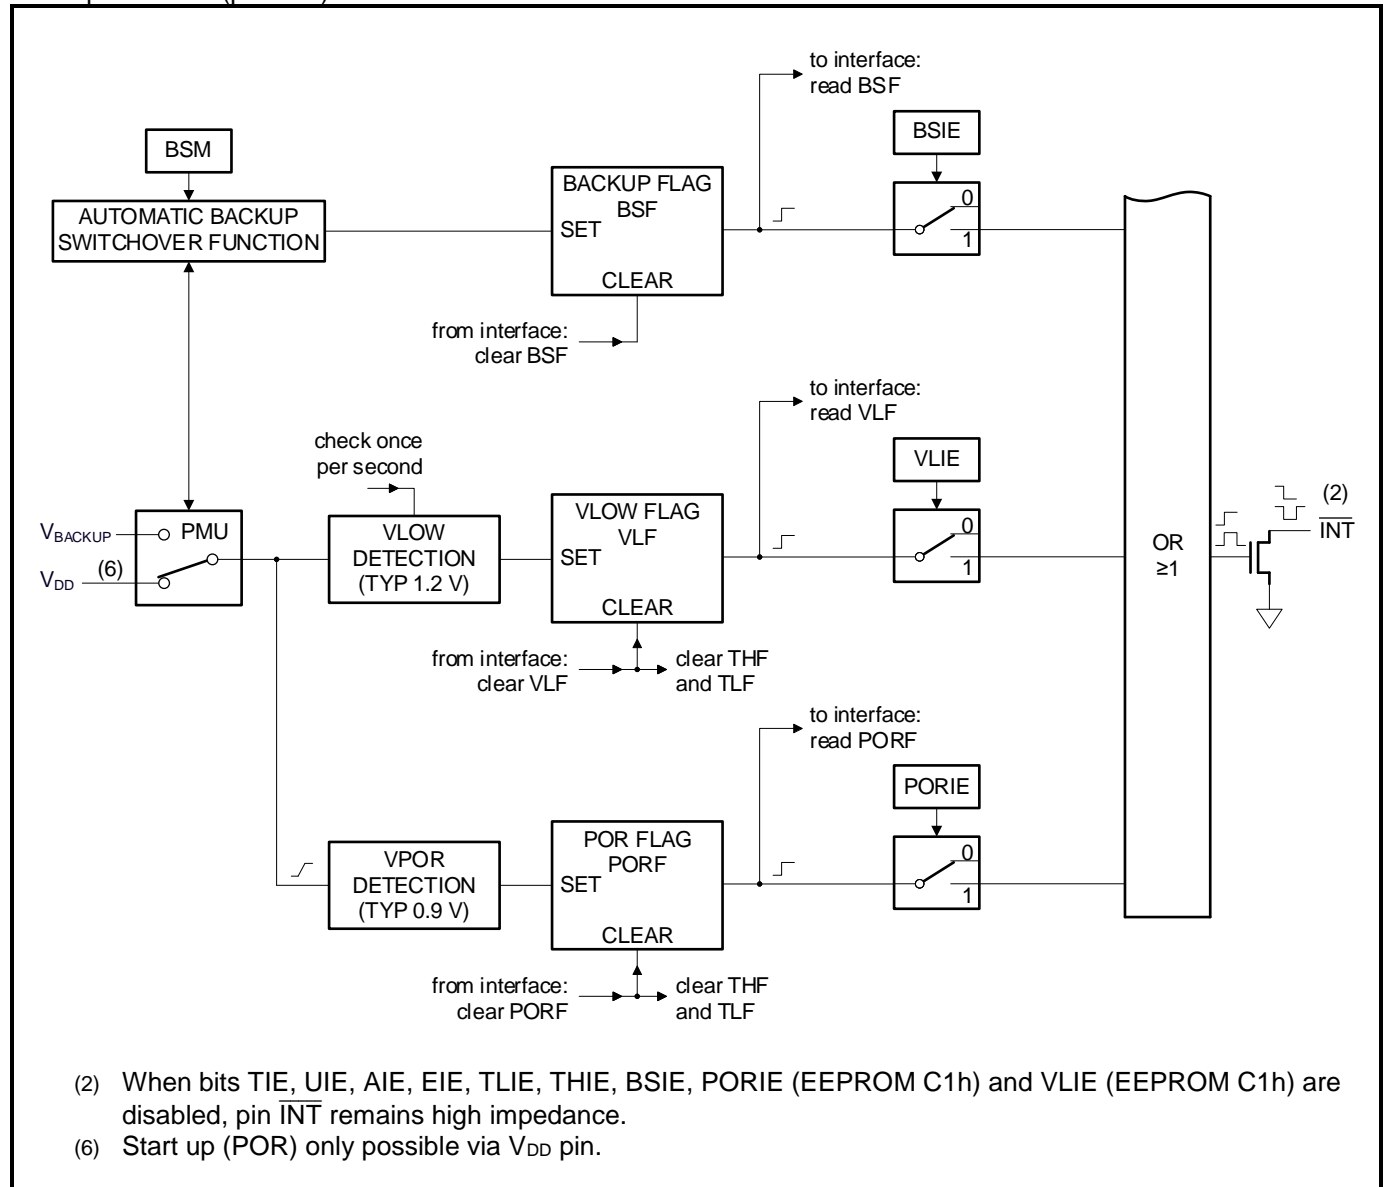

4.8. PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION

The Periodic Countdown Timer Interrupt function generates an interrupt event periodically at any period set from 244.14 μ s to 4095 minutes.


When starting the countdown timer for the first time, only the first period does not have a fixed duration. The amount of inaccuracy for the first timer period depends on the selected source clock (see FIRST PERIOD DURATION). When an interrupt event is generated, the $\overline{\text{INT}}$ pin goes to the low level and the TF flag is set to 1 to indicate that an event has occurred. The output on the $\overline{\text{INT}}$ pin is only effective if the TIE bit in the Control 2 register is set to 1. The low-level output signal on $\overline{\text{INT}}$ pin is automatically cleared after the Auto reset time t_{RTN1} or it is cancelled when TF flag is cleared to 0.

- When TD = 00, $t_{\text{RTN1}} = 122 \mu\text{s}$
- When TD = 01, 10 or 11, $t_{\text{RTN1}} = 7.813 \text{ ms}$

When bit TIE is set to 1, the internal countdown timer interrupt pulse (TI) can be used to enable the clock output on CLKOUT pin automatically. See PROGRAMMABLE CLOCK OUTPUT.

4.8.1. PERIODIC COUNTDOWN TIMER DIAGRAM

Diagram of the Periodic Countdown Timer Interrupt function: Example with interrupt on $\overline{\text{INT}}$ pin (TIE = 1).

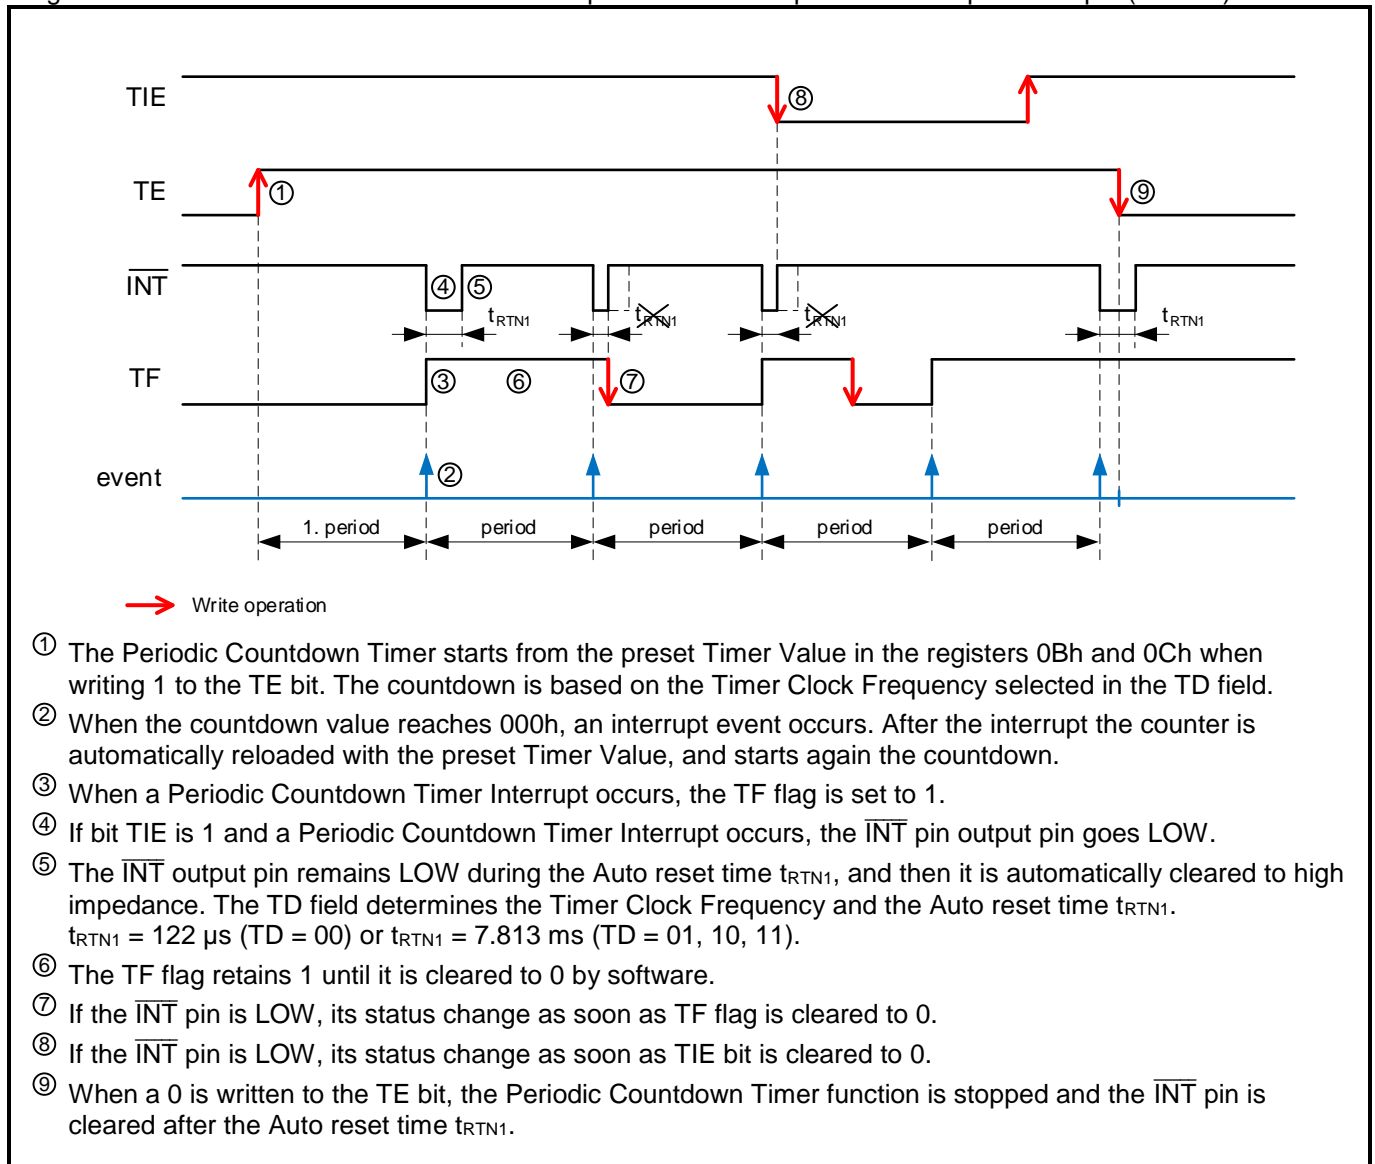

4.8.2.USE OF THE PERIODIC COUNTDOWN TIMER INTERRUPT

The following registers, fields and bits are related to the Periodic Countdown Timer Interrupt and Interrupt Controlled Clock Output functions:

- Timer Value 0 Register (0Bh) (see PERIODIC COUNTDOWN TIMER CONTROL REGISTERS)
- Timer Value 1 Register (0Ch) (see PERIODIC COUNTDOWN TIMER CONTROL REGISTERS)
- TF flag (see STATUS REGISTER, 0Dh – Status)
- TE bit and TD field (see CONTROL REGISTERS, 10h – Control 1)
- TIE bit (see CONTROL REGISTERS, 11h – Control 2)
- INTDE and CTIE bits (see CLOCK INTERRUPT MASK REGISTER, 14h – Clock Interrupt Mask)

See also INTERRUPT CONTROLLED CLOCK OUTPUT.

Prior to entering any timer settings for the Periodic Countdown Timer Interrupt, it is recommended to write a 0 to the TIE and TE bits to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin. The Timer Clock Frequency selection field TD is used to set the countdown period (source clock) for the Periodic Countdown Timer Interrupt function (four settings are possible). When STOP bit is set to 1 the interrupt function is stopped. When writing to the Seconds register or when ESYN bit is 1 in case of an External Event detection on EVI pin the length of the current countdown period is affected (see TIME SYNCHRONIZATION). When the Periodic Countdown Timer Interrupt function is not used, the Timer Value 0 register (0Bh) can be used as RAM byte.

Procedure to start the Periodic Countdown Timer Interrupt function and Interrupt Controlled Clock Output functions:

1. Initialize bits TE, TIE and TF to 0. In that order, to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin.
2. Choose the Timer Clock Frequency and write the corresponding value in the TD field.
3. Choose the Countdown Period based on the Timer Clock Frequency, and write the corresponding Timer Value to the registers Timer Value 0 (0Bh) and Timer Value 1 (0Ch). See following table.
4. Set the TIE bit to 1 if you want to get a hardware interrupt on $\overline{\text{INT}}$ pin or if you want to use the Interrupt Controlled Clock Output function.
5. Set CTIE bit to 1 if you want to enable clock output when a timer interrupt occurs.
6. Set INTDE bit to 1 if you want to enable interrupt Delay after CLKOUT On.
7. Set the TE bit from 0 to 1 to start the Periodic Countdown Timer. The countdown starts at the rising edge of the SCL signal after Bit 0 of the Address 10h is transferred. See subsequent Figure that shows the start timing.


Countdown Period in seconds:

$$\text{Countdown Period} = \frac{\text{Timer Value}}{\text{Timer Clock Frequency}}$$


Countdown Period:

Timer Value (0Bh and 0Ch)	Countdown Period			
	TD = 00 (4096 Hz)	TD = 01 (64 Hz)	TD = 10 (1 Hz)	TD = 11 (1/60 Hz)
0	-	-	-	-
1	244.14 μ s	15.625 ms	1 s	1 min
2	488.28 μ s	31.25 ms	2 s	2 min
:	:	:	:	:
41	10.010 ms	640.63 ms	41 s	41 min
205	50.049 ms	3.203 s	205 s	205 min
410	100.10 ms	6.406 s	410 s	410 min
2048	500.00 ms	32.000 s	2048 s	2048 min
:	:	:	:	:
4095 (FFFh)	0.9998 s	63.984 s	4095 s	4095 min

General countdown timer behavior:

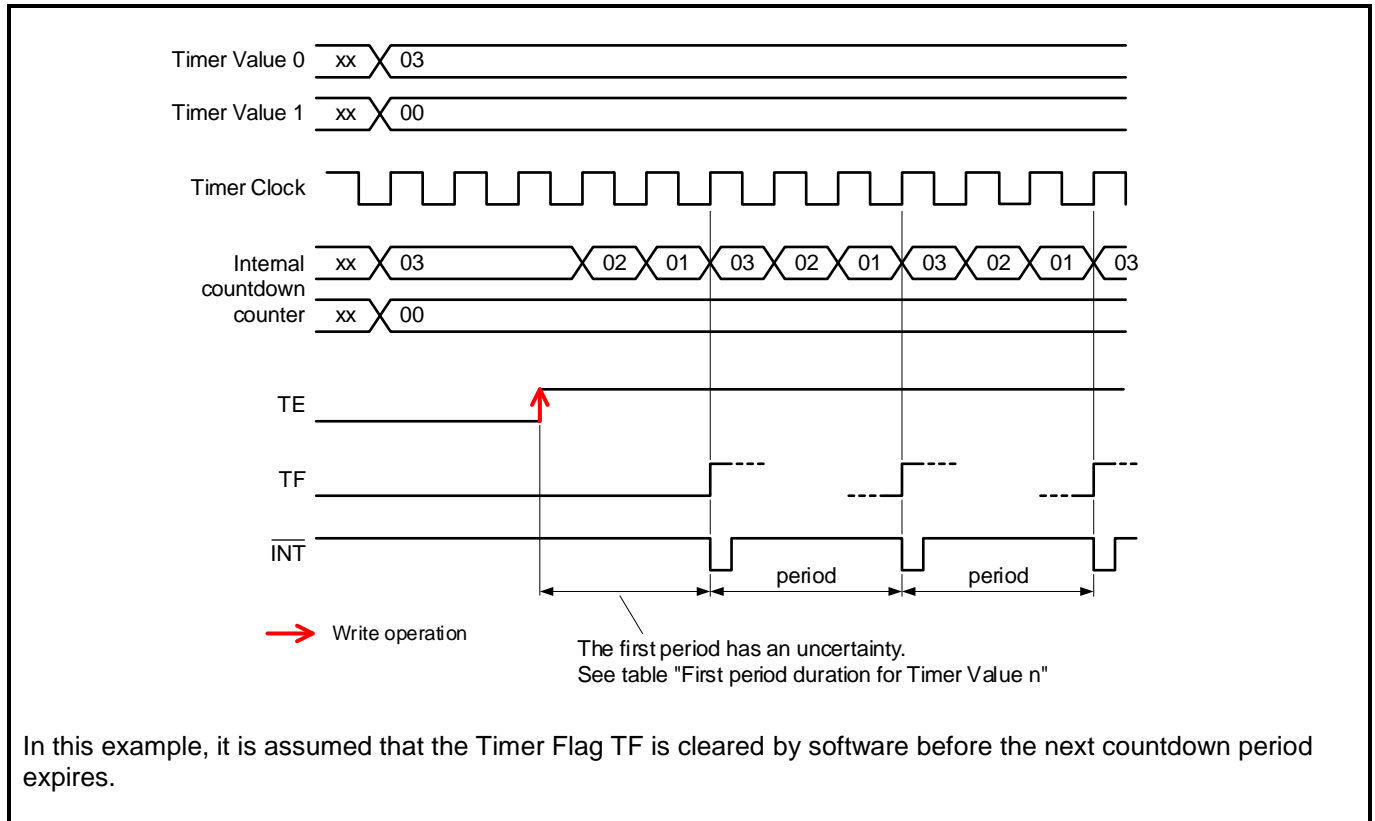

Start timing of the Periodic Countdown Timer:

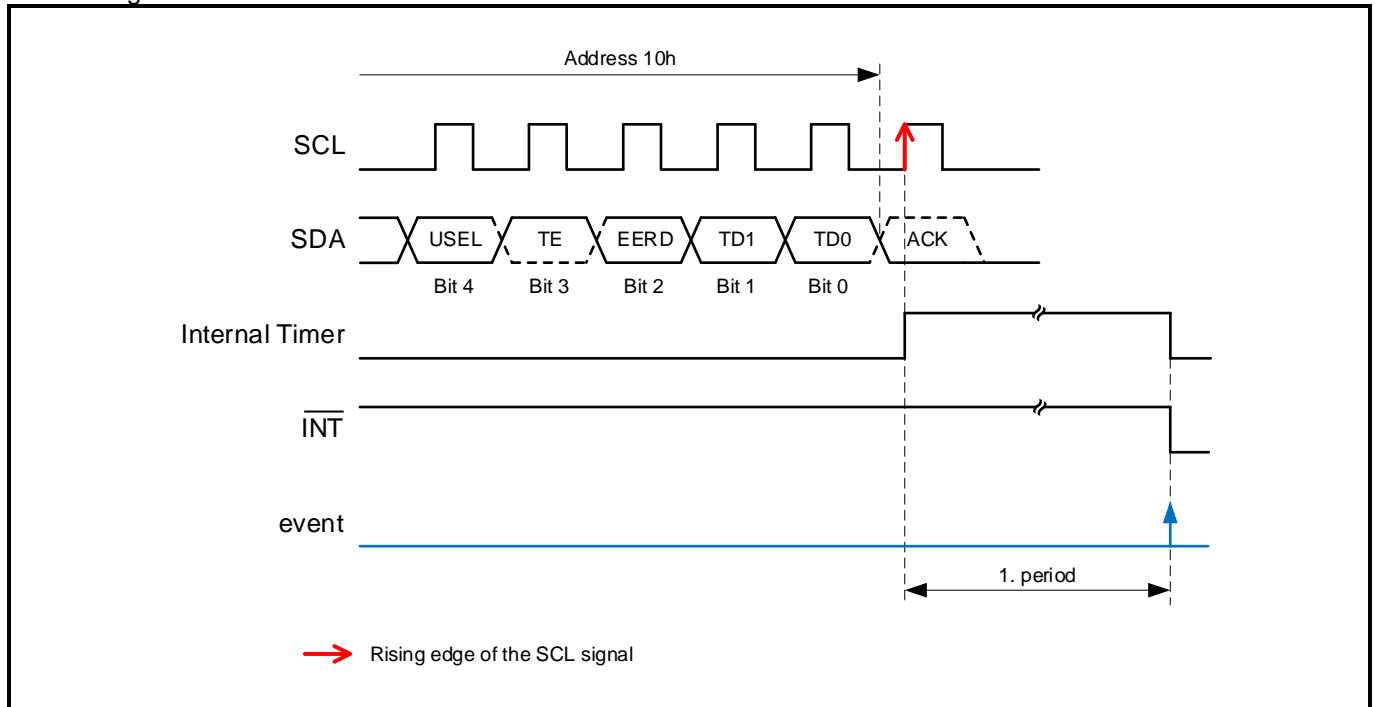

4.8.3.FIRST PERIOD DURATION

When the TF flag is set, it indicates that an interrupt signal on $\overline{\text{INT}}$ is generated if this mode is enabled. See Section INTERRUPT OUTPUT for details on how the interrupt can be controlled.

When starting the timer for the first time, the first period has an uncertainty. The uncertainty arises because of the activation instruction of the interface clock, which is not synchronous to the Timer Clock Frequency. Subsequent timer periods do not have such deviation. The amount of deviation for the first timer period depends on the chosen Timer Clock Frequency, see following Table.

First period duration for Timer Value n ⁽¹⁾:

TD value	Timer Clock Frequency	First period duration		Subsequent periods duration
		Minimum Period	Maximum Period	
00	4096 Hz	$n \times 244 \mu\text{s} + 61 \mu\text{s}$	$(n + 1) \times 244 \mu\text{s} + 61 \mu\text{s}$	$n \times 244 \mu\text{s}$
01	64 Hz	$n \times 15.625 \text{ ms}$	$(n + 1) \times 15.625 \text{ ms}$	$n \times 15.625 \text{ ms}$
10	1 Hz	$n \times 1 \text{ s}$	$(n + 1) \times 1 \text{ s}$	$n \times 1 \text{ s}$
11	1/60 Hz	$n \times 60 \text{ s}$	$(n + 1) \times 60 \text{ s}$	$n \times 60 \text{ s}$

⁽¹⁾ Timer Values n from 1 to 4095 are valid. When the Timer Value is set to 0, the countdown timer does not start.

At the end of every countdown, the timer sets the Periodic Countdown Timer Flag (bit TF in Status Register). The TF flag can only be cleared by command. When enabled, a pulse is generated at the interrupt pin $\overline{\text{INT}}$.

When reading the Timer Value (Timer Value 0 and Timer Value 1), the preset value is returned and not the current value.

4.9. PERIODIC TIME UPDATE INTERRUPT FUNCTION

The Periodic Time Update Interrupt function generates an interrupt event periodically at the One-Second or the One-Minute update time, according to the selected timer source with bit USEL.


When an interrupt event is generated, the $\overline{\text{INT}}$ pin goes to the low level and the UF flag is set to 1 to indicate that an event has occurred. The output on $\overline{\text{INT}}$ pin is only effective if UIE bit in Control 2 register is set to 1. The low-level output signal on the $\overline{\text{INT}}$ pin is automatically cleared after the Auto reset time t_{RTN2} or it is cancelled when UF flag is cleared to 0 or when UIE is cleared to 0.

- When USEL = 0 (Second update), $t_{\text{RTN2}} = 500 \text{ ms}$
- When USEL = 1 (Minute update), $t_{\text{RTN2}} = 15.6 \text{ ms}$

When bit UIE is set to 1, the internal update interrupt pulse (UI) can be used to enable the clock output on CLKOUT pin automatically. See PROGRAMMABLE CLOCK OUTPUT.

4.9.1. PERIODIC TIME UPDATE DIAGRAM

Diagram of the Periodic Time Update Interrupt function:

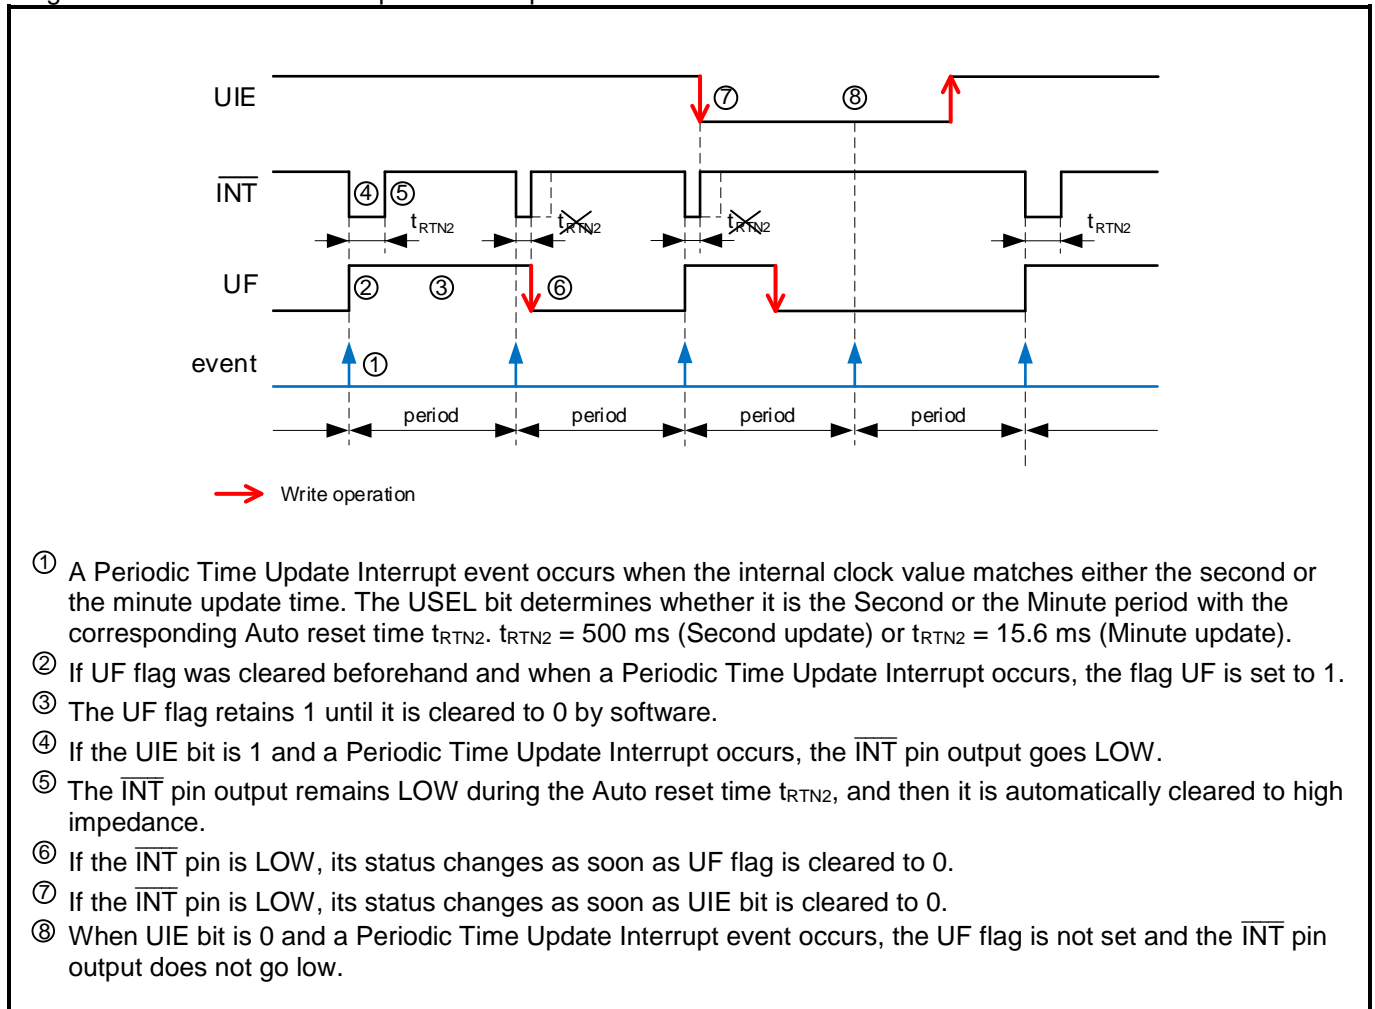

4.9.2.USE OF THE PERIODIC TIME UPDATE INTERRUPT

The following bits are related to the Periodic Time Update Interrupt and Interrupt Controlled Clock Output functions:

- UF flag (see STATUS REGISTER, 0Dh – Status)
- USEL bit (see CONTROL REGISTERS, 10h – Control 1)
- UIE bit (see CONTROL REGISTERS, 11h – Control 2)
- INTDE and CUIE bits (see CLOCK INTERRUPT MASK REGISTER, 14h – Clock Interrupt Mask)

See also INTERRUPT CONTROLLED CLOCK OUTPUT.

Prior to entering any other settings, it is recommended to write a 0 to the UIE bit to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin. When STOP bit is set to 1 the interrupt function is stopped. When writing to the Seconds register or when ESYN bit is 1 in case of an External Event detection on EVI pin the length of the current update period is affected (see TIME SYNCHRONIZATION).

Procedure to use the Periodic Time Update Interrupt and Interrupt Controlled Clock Output functions:

1. Initialize bits UIE and UF to 0.
2. Choose the timer source clock and write the corresponding value in the USEL bit.
3. Set the UIE bit to 1 to enable the Periodic Time Update Interrupt function with hardware interrupt on $\overline{\text{INT}}$ pin or if you want to use the Interrupt Controlled Clock Output function.
4. Set CUIE bit to 1 if you want to enable clock output when a time update interrupt occurs.
5. Set INTDE bit to 1 if you want to enable interrupt Delay after CLKOUT On.
6. The first interrupt will occur after the next event, either second or minute change.


4.10. ALARM INTERRUPT FUNCTION

The Alarm Interrupt function generates an interrupt for alarm settings such as date, hours and minutes settings. When an interrupt event is generated, the $\overline{\text{INT}}$ pin goes to the low level and the AF flag is set to 1 to indicate that an event has occurred. The output on the $\overline{\text{INT}}$ pin is only effective if the AIE bit in the Control 2 register is set to 1.

When bit AIE is set to 1, the internal alarm interrupt signal (AI) can be used to enable the clock output on CLKOUT pin automatically. See PROGRAMMABLE CLOCK OUTPUT.

4.10.1. ALARM DIAGRAM

Diagram of the Alarm Interrupt function:

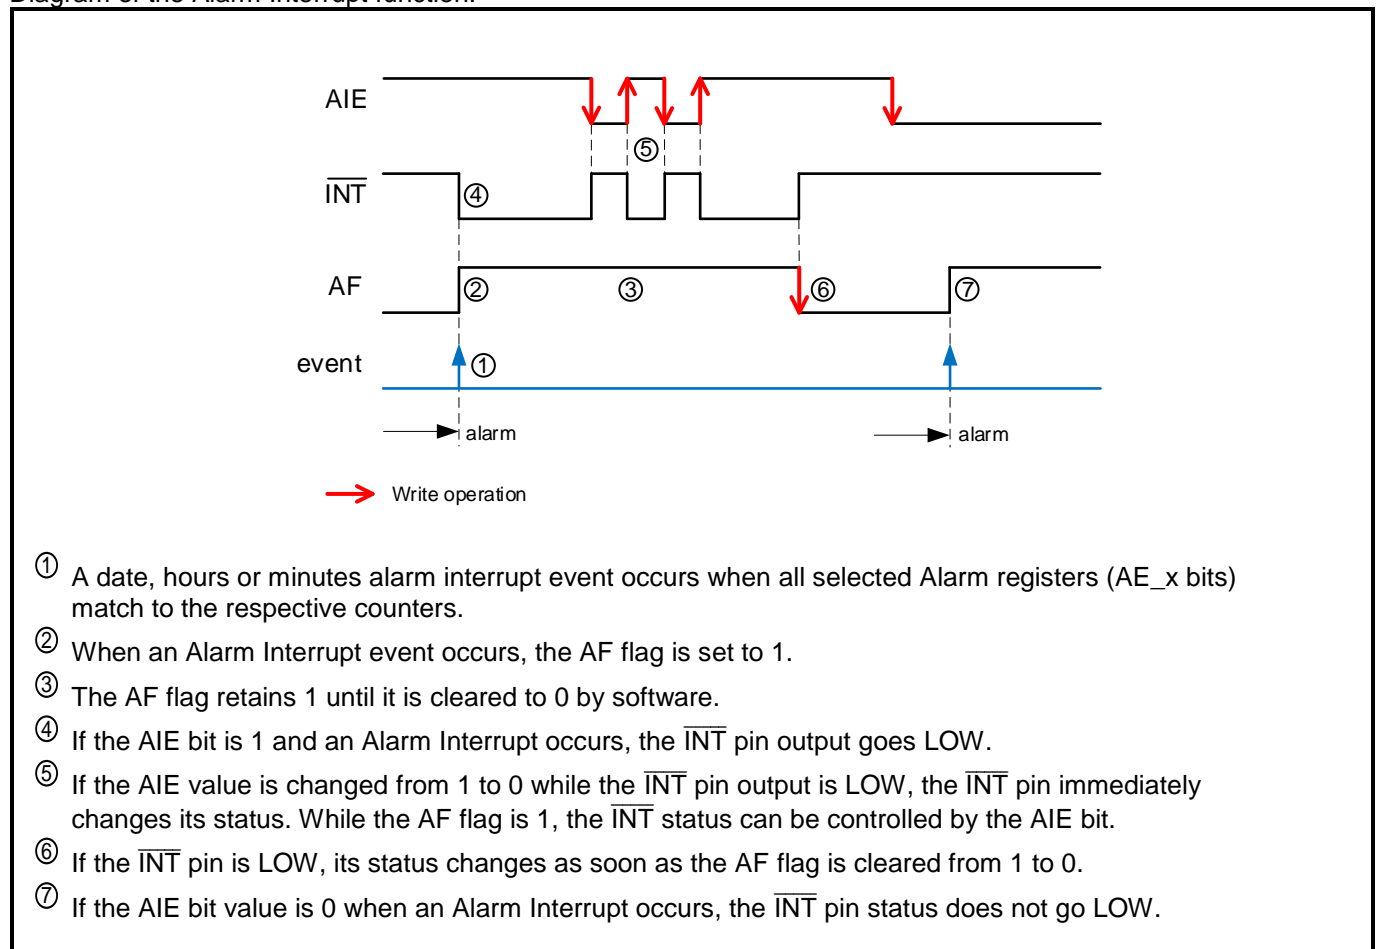

4.10.2. USE OF THE ALARM INTERRUPT

The following registers and bits are related to the Alarm Interrupt and Interrupt Controlled Clock Output functions:

- Minutes Register (02h) (see CLOCK REGISTERS)
- Hours Register (03h) (see CLOCK REGISTERS)
- Date Register (05h) (see CALENDAR REGISTERS)
- Minutes Alarm Register and AE_M bit (08h) (see ALARM REGISTERS)
- Hours Alarm Register and AE_H bit (09h) (see ALARM REGISTERS)
- Date Alarm Register and AE_D bit (0Ah) (see ALARM REGISTERS)
- AF flag (see STATUS REGISTER, 0Dh – Status)
- AIE bit (see CONTROL REGISTERS, 11h – Control 2)
- INTDE and CAIE bits (see CLOCK INTERRUPT MASK REGISTER, 14h – Clock Interrupt Mask)

See also INTERRUPT CONTROLLED CLOCK OUTPUT.

Prior to entering any timer settings for the Alarm Interrupt, it is recommended to write a 0 to the AIE bit to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin. When STOP bit is set to 1 the interrupt function is stopped. When writing to the Seconds register or when ESYN bit is 1 in case of an External Event detection on EVI pin the length of the time to the next alarm interrupt is affected (see TIME SYNCHRONIZATION). When the Alarm Interrupt function is not used, one Byte (08h) of the Alarm registers can be used as RAM byte. In such case, be sure to write a 0 to the AIE bit (if the AIE bit value is 1 and the Alarm register is used as RAM register, $\overline{\text{INT}}$ may change to low level unintentionally).

Procedure to use the Alarm Interrupt and Interrupt Controlled Clock Output functions:

1. Initialize bits AIE and AF to 0.
2. Write the desired alarm settings in registers 08h to 0Ah. The three alarm enable bits, AE_M, AE_H and AE_D, are used to select the corresponding register that has to be taken into account for match or not. See the following table.
3. Set CAIE bit to 1 if you want to enable clock output when an alarm occurs.
4. Set INTDE bit to 1 if you want to enable interrupt Delay after CLKOUT On.
5. Set the AIE bit to 1 if you want to get a hardware interrupt on $\overline{\text{INT}}$ pin or if you want to use the Interrupt Controlled Clock Output function.

Alarm Interrupt:

Alarm enable bits			Alarm event
AE_D	AE_H	AE_M	
0	0	0	When minutes, hours and date match (once per month) ⁽¹⁾ ⁽²⁾ – Default value
0	0	1	When hours and date match (once per month) ⁽¹⁾ ⁽²⁾
0	1	0	When minutes and date match (once per hour per month) ⁽¹⁾ ⁽²⁾
0	1	1	When date matches (once per month) ⁽¹⁾ ⁽²⁾
1	0	0	When minutes and hours match (once per day) ⁽¹⁾
1	0	1	When hours match (once per day) ⁽¹⁾
1	1	0	When minutes match (once per hour) ⁽¹⁾
1	1	1	Every minute ⁽³⁾

⁽¹⁾ AE_x bits (where x is D, H and M)
 AE_x = 0: Alarm is enabled
 AE_x = 1: Alarm is disabled

⁽²⁾ When AE_D = 0 = enabled (default) and Date Alarm value = 00h = not valid (default) the Alarm function is deactivated (AF flag is never set).

⁽³⁾ Note that if all AE_x = 1, there is no match, but an alarm event occurs every minute.

4.11. EXTERNAL EVENT INTERRUPT FUNCTION


The External Event Interrupt is enabled by control bit EIE. The Time Stamp EVI function is always working (except in VBACKUP Power state). With the ET field the EVI input events can be configured either for edge detection, or for edge & level detection with filtering, and with the EHL bit the active edge/level can be configured. In VBACKUP Power state, the External Event function is disabled.

If enabled (EIE = 1 and EVF flag was cleared to 0 before) and an External Event on EVI pin is detected, the clock and calendar registers are captured and copied into the Time Stamp EVI registers, the $\overline{\text{INT}}$ is issued and the EVF flag is set to 1 to indicate that an external event has occurred.

When bit EIE is set to 1, the internal signal (EI) of the external event interrupt can be used to enable the clock output on CLKOUT pin automatically. See PROGRAMMABLE CLOCK OUTPUT.

4.11.1. EXTERNAL EVENT DIAGRAM

Diagram of the External Event Interrupt function. Example with EHL = 1 for rising edge/high level detection and without time synchronization function (ESYN = 0):

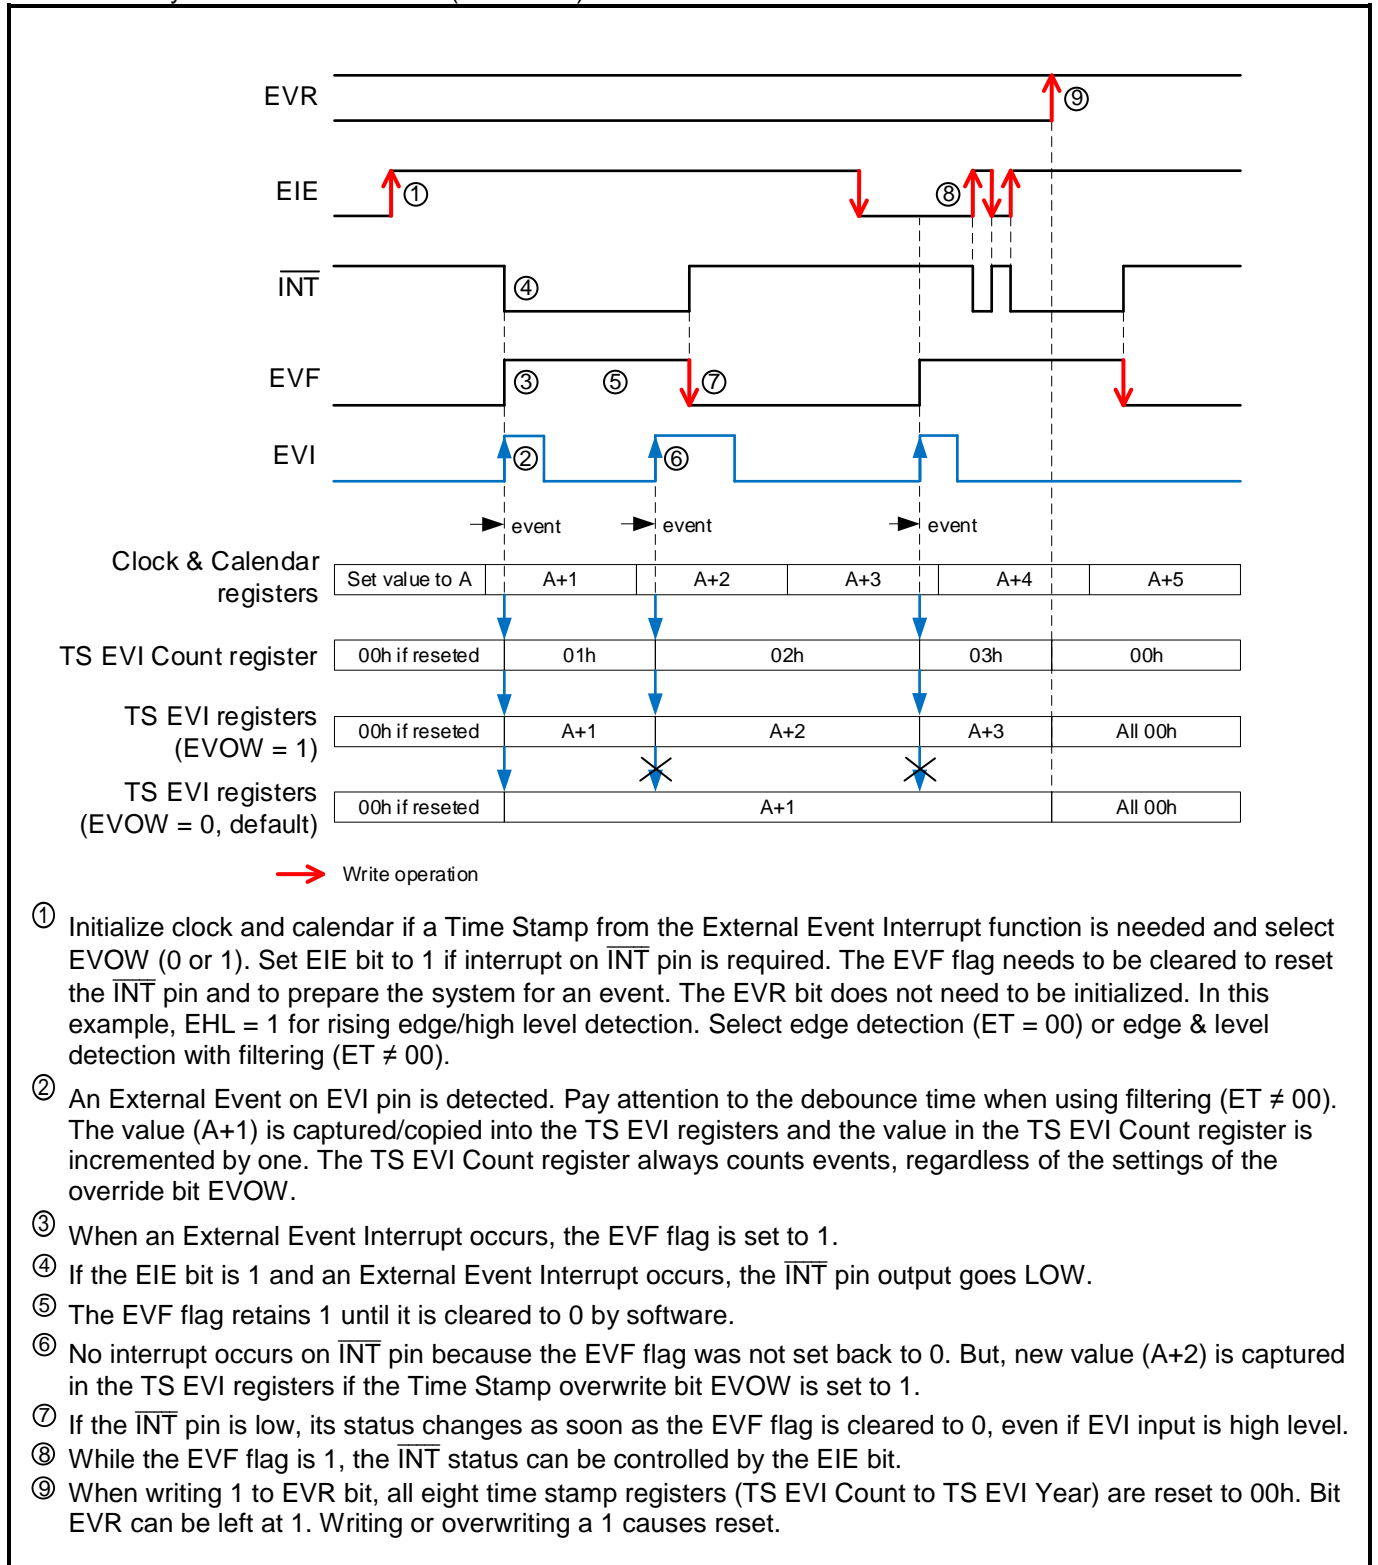

4.11.2. USE OF THE EXTERNAL EVENT INTERRUPT

The following registers and bits are related to the External Event Interrupt, EVI Time Stamp and Interrupt Controlled Clock Output functions:

- 100th Seconds Register (00h) (see CLOCK REGISTERS)
- Seconds Register (01h) (see CLOCK REGISTERS)
- Minutes Register (02h) (see CLOCK REGISTERS)
- Hours Register (03h) (see CLOCK REGISTERS)
- Date Register (05h) (see CALENDAR REGISTERS)
- Month Register (06h) (see CALENDAR REGISTERS)
- Year Register (07h) (see CALENDAR REGISTERS)
- TS EVI Count Register (26h) (see TIME STAMP EVI REGISTERS)
- TS EVI 100th Seconds Register (27h) (see TIME STAMP EVI REGISTERS)
- TS EVI Seconds (28h) (see TIME STAMP EVI REGISTERS)
- TS EVI Minutes (29h) (see TIME STAMP EVI REGISTERS)
- TS EVI Hours (2Ah) (see TIME STAMP EVI REGISTERS)
- TS EVI Date (2Bh) (see TIME STAMP EVI REGISTERS)
- TS EVI Month (2Ch) (see TIME STAMP EVI REGISTERS)
- TS EVI Year (2Dh) (see TIME STAMP EVI REGISTERS)
- EVF flag (see STATUS REGISTER, 0Dh – Status)
- EIE bit (see CONTROL REGISTERS, 11h – Control 2)
- EVR and EVOW bits (see TIME STAMP CONTROL REGISTER, 13h – Time Stamp Control)
- INTDE and CEIE bits (see CLOCK INTERRUPT MASK REGISTER, 14h – Clock Interrupt Mask)
- EHL bit, ET field and ESYN bit (see EVI CONTROL REGISTER, 15h – EVI Control)

See also INTERRUPT CONTROLLED CLOCK OUTPUT.


Prior to entering any other settings, it is recommended to write a 0 to the EIE bit to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin. When STOP bit is set to 1 the interrupt function is still working, but because the 1 Hz tick is stopped and 100th Seconds register is reset to 00, it cannot provide useful data. When writing to the Seconds register or when ESYN bit is 1 in case of an External Event detection on EVI pin the length of the time to the next alarm interrupt is affected (see TIME SYNCHRONIZATION).

Procedure to use the External Event Interrupt, EVI Time Stamp and Interrupt Controlled Clock Output functions:

1. Initialize bit EIE to 0.
2. Clear flag EVF to 0.
3. Set EHL bit to 0 or 1 to choose falling edge/low level or rising edge/high level detection on pin EVI.
4. Select EDGE DETECTION (ET = 00) or LEVEL DETECTION WITH FILTERING (ET ≠ 00).
5. Set EVOW bit to 1 if the last occurred event has to be recorded and TS EVI registers are overwritten.
Hint: The TS EVI Count register always counts events, regardless of the settings of the override bit EVOW.
6. Write 1 to EVR bit, to reset all Time Stamp EVI registers to 00h. The bit EVR does not need to be reset.
7. Set CEIE bit to 1 if you want to enable clock output when external event occurs. See also CLOCK OUTPUT SCHEME.
8. Set INTDE bit to 1 if you want to enable interrupt Delay after $\overline{\text{CLKOUT}}$ On.
9. Set EIE bit to 1 if you want to get a hardware interrupt on $\overline{\text{INT}}$ pin or if you want to use the Interrupt Controlled Clock Output function.

4.11.3. EDGE DETECTION (ET = 00)

Example with rising edge detection and interrupt output:

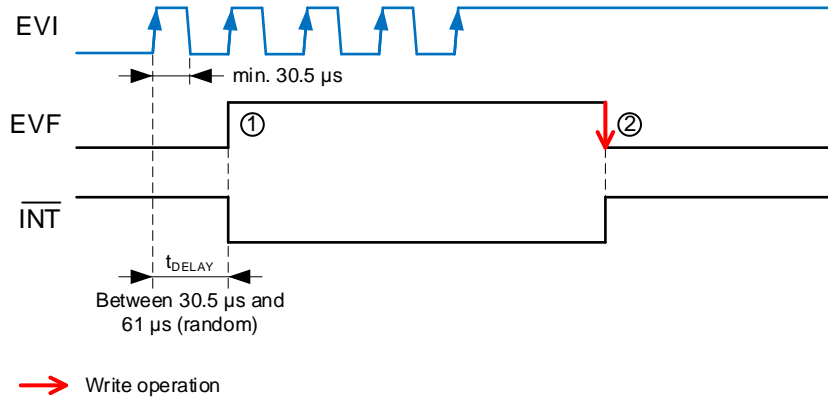


Settings: EHL = 1, ET = 00, EIE = 1.

- ① When a rising edge on EVI pin is detected, the EVF flag is set to 1 and the $\overline{\text{INT}}$ output pin goes LOW.
- ② If the $\overline{\text{INT}}$ pin is LOW, its status changes as soon as the EVF flag is cleared to 0, even if EVI input is high level.

4.11.4. LEVEL DETECTION WITH FILTERING (ET ≠ 00)

Example with high level detection (rising edge & high level) and interrupt output:

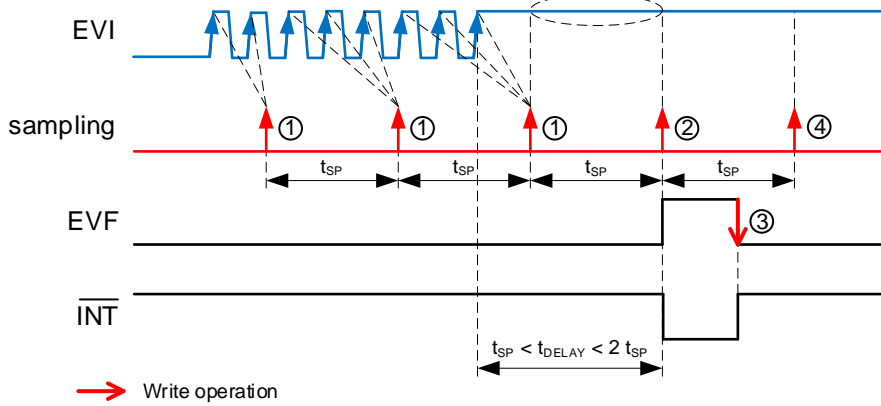

Settings: EHL = 1, ET ≠ 00, EIE = 1.

Available sampling periods for the digital debounce filtering:

- ET = 01, $t_{SP} = 3.9 \text{ ms}$
- ET = 10, $t_{SP} = 15.6 \text{ ms}$
- ET = 11, $t_{SP} = 125.0 \text{ ms}$

- ① From the previous sampling pulse to this sampling pulse a positive edge was detected.
- ② If a positive edge was detected in the previous period and a stable high level on EVI pin was detected in the following sampling period, the EVF flag is set to 1 and the $\overline{\text{INT}}$ output pin goes LOW. The delay time t_{DELAY} is between t_{SP} and $2 t_{SP}$.
- ③ If the $\overline{\text{INT}}$ pin is LOW, its status changes as soon as the EVF flag is cleared to 0.
- ④ In subsequent stable high level periods, the interrupt is not triggered.

4.12. TEMPERATURE LOW INTERRUPT FUNCTION

The Temperature Low Interrupt and the Time Stamp TLow function are enabled by the control bits TLE and TLIE. The Temperature Low Threshold value TLT which is compared with the TEMP [11:4] value can be defined in register 16h.


If enabled (TLE = 1 and TLIE = 1 and TLF flag was cleared to 0 before) and TEMP [11:4] < TLT is detected (automatic temperature measurement is carried out once per second), the clock and calendar registers are captured and copied into the Time Stamp TLow registers, the $\overline{\text{INT}}$ is issued and the TLF flag is set to 1 to indicate that a temperature low event has occurred.

Note that the THF and TLF flags are always reset whenever the register 0Dh Status is written to (using 0s or 1s).

When bit TLIE is set to 1, the internal signal (TLI) of the temperature low event interrupt can be used to enable the clock output on CLKOUT pin automatically. See PROGRAMMABLE CLOCK OUTPUT.

4.12.1. TEMPERATURE LOW DIAGRAM

Diagram of the Temperature Low Interrupt function. Example with Temperature Low detection enabled (TLE = 1):

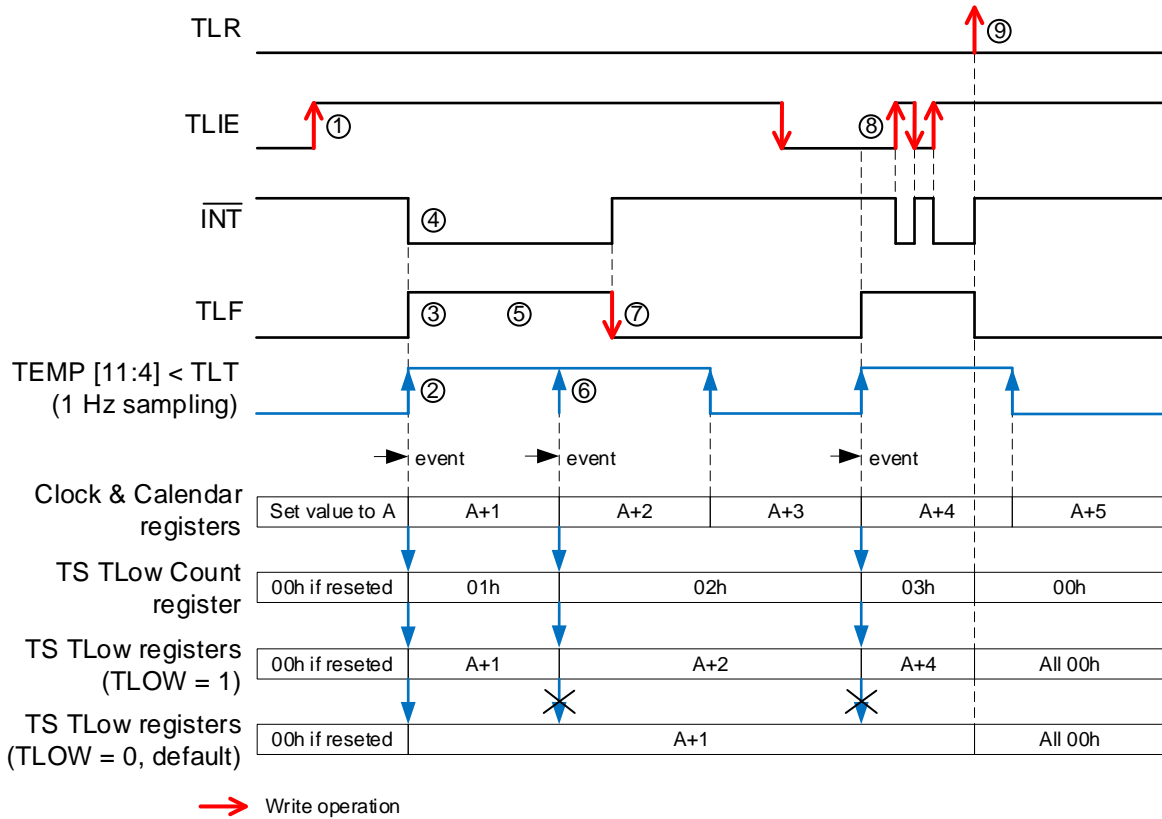

- ① Initialize clock and calendar if a Time Stamp from the TLow Interrupt function is needed and select TLOW (0 or 1). Enter the desired Temperature Low Threshold value TLT. Set TLIE bit to 1 if interrupt on $\overline{\text{INT}}$ pin is required. The TLF flag needs to be cleared to reset the $\overline{\text{INT}}$ pin and to prepare the system for an event.
- ② A TLow event is detected. The value (A+1) is captured/copied into the TS TLow registers and the value in the TS TLow Count register is incremented by one. The TS TLow Count register always counts events, regardless of the settings of the override bit TLOW.
- ③ When a TLow Interrupt occurs, the TLF flag is set to 1.
- ④ If the TLIE bit is 1 and a TLow Interrupt occurs, the $\overline{\text{INT}}$ pin output goes LOW.
- ⑤ The TLF flag retains 1 until it is cleared to 0 by software.
- ⑥ No interrupt occurs on $\overline{\text{INT}}$ pin because the TLF flag was not set back to 0. But, new value (A+2) is captured in the TS TLow registers if the Time Stamp overwrite bit TLOW is set to 1.
- ⑦ If the $\overline{\text{INT}}$ pin is low, its status changes as soon as the TLF flag is cleared to 0, even if $\text{TEMP} [11:4] < \text{TLT}$.
- ⑧ While the TLF flag is 1, the $\overline{\text{INT}}$ status can be controlled by the TLIE bit.
- ⑨ When writing 1 to TLR bit, all seven time stamp registers (TS TLow Count to TS TLow Year) are reset to 00h. The TLF flag is also cleared to 0 when writing 1 to the TLR bit and $\overline{\text{INT}}$ pin goes high impedance. Bit TLR always returns 0 when read.

Note that the THF and TLF flags are always reset whenever the register 0Dh Status is written to (using 0s or 1s).

4.12.2. USE OF THE TEMPERATURE LOW INTERRUPT

The following registers and bits are related to the Temperature Low Interrupt, TLow Time Stamp and Interrupt Controlled Clock Output functions:

- Seconds Register (01h) (see CLOCK REGISTERS)
- Minutes Register (02h) (see CLOCK REGISTERS)
- Hours Register (03h) (see CLOCK REGISTERS)
- Date Register (05h) (see CALENDAR REGISTERS)
- Month Register (06h) (see CALENDAR REGISTERS)
- Year Register (07h) (see CALENDAR REGISTERS)
- TLow Threshold Register (16h) (see TEMPERATURE THRESHOLDS REGISTERS)
- TS TLow Count Register (18h) (see TIME STAMP TLOW REGISTERS)
- TS TLow Seconds (19h) (see TIME STAMP TLOW REGISTERS)
- TS TLow Minutes (1Ah) (see TIME STAMP TLOW REGISTERS)
- TS TLow Hours (1Bh) (see TIME STAMP TLOW REGISTERS)
- TS TLow Date (1Ch) (see TIME STAMP TLOW REGISTERS)
- TS TLow Month (1Dh) (see TIME STAMP TLOW REGISTERS)
- TS TLow Year (1Eh) (see TIME STAMP TLOW REGISTERS)
- TLF flag (see STATUS REGISTER, 0Dh – Status)
- TLE and TLIE bits (see CONTROL REGISTERS, 12h – Control 3)
- TLR and TLOW bits (see TIME STAMP CONTROL REGISTER, 13h – Time Stamp Control)
- INTDE and CTLIE bits (see CLOCK INTERRUPT MASK REGISTER, 14h – Clock Interrupt Mask)

See also INTERRUPT CONTROLLED CLOCK OUTPUT.

Prior to entering any timer settings for the Temperature Low Interrupt, it is recommended to write a 0 to the TLE and TLIE bits to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin. When the STOP bit value is 1, the Temperature Low Interrupt function cannot provide new data because the 1 Hz tick is stopped and because temperature measurement, temperature compensation and temperature comparison with the TLT value is stopped. When writing to the Seconds register or when the ESYN bit is 1 in case of an External Event detection on EVI pin the time is synchronized and the 100th Seconds register is reset to 00 (see TIME SYNCHRONIZATION).

When the Temperature Low Interrupt function is not used, the TLow Threshold register (16h) can be used as RAM byte. In such case, be sure to write a 0 to the TLE and TLIE bits (if the TLE and TLIE bit values are 1 and the TLow Threshold register is used as RAM register, $\overline{\text{INT}}$ may change to low level unintentionally).

Procedure to use the Temperature Low Interrupt, TLow Time Stamp and Interrupt Controlled Clock Output functions:

1. Initialize bits TLE and TLIE to 0.
2. Clear flag TLF to 0.
3. Enter the desired Temperature Low Threshold value TLT.
4. Set TLOW bit to 1 if the last occurred event has to be recorded and TS TLow registers are overwritten.
Hint: The TS TLow Count register always counts events, regardless of the settings of the override bit TLOW.
5. Write 1 to TLR bit, to reset all Time Stamp TLow registers to 00h. With this reset, the TLF flag is also automatically reset to 0. The TLR bit always returns 0 when read.
6. Set CTLIE bit to 1 if you want to enable clock output when temperature low interrupt occurs. See also CLOCK OUTPUT SCHEME.
7. Set INTDE bit to 1 if you want to enable interrupt Delay after CLKOUT On.
8. Set TLIE bit to 1 if you want to get a hardware interrupt on $\overline{\text{INT}}$ pin or if you want to use the Interrupt Controlled Clock Output function.
9. Set the TLE bit from 0 to 1 to start the Temperature Low detection.

Note that the THF and TLF flags are always reset whenever the register 0Dh Status is written to (using 0s or 1s).

4.13. TEMPERATURE HIGH INTERRUPT FUNCTION

The Temperature High Interrupt and the Time Stamp THigh function are enabled by the control bits THE and THIE. The Temperature High Threshold value THT which is compared with the TEMP [11:4] value can be defined in register 17h.


If enabled (THE = 1 and THIE = 1 and THF flag was cleared to 0 before) and TEMP [11:4] > THT is detected (automatic temperature measurement is carried out once per second), the clock and calendar registers are captured and copied into the Time Stamp THigh registers, the INT is issued and the THF flag is set to 1 to indicate that a temperature high event has occurred.

Note that the THF and TLF flags are always reset whenever the register 0Dh Status is written to (using 0s or 1s).

When bit THIE is set to 1, the internal signal (THI) of the temperature high event interrupt can be used to enable the clock output on CLKOUT pin automatically. See PROGRAMMABLE CLOCK OUTPUT.

4.13.1. TEMPERATURE HIGH DIAGRAM

Diagram of the Temperature High Interrupt function. Example with Temperature High detection enabled (THE = 1):

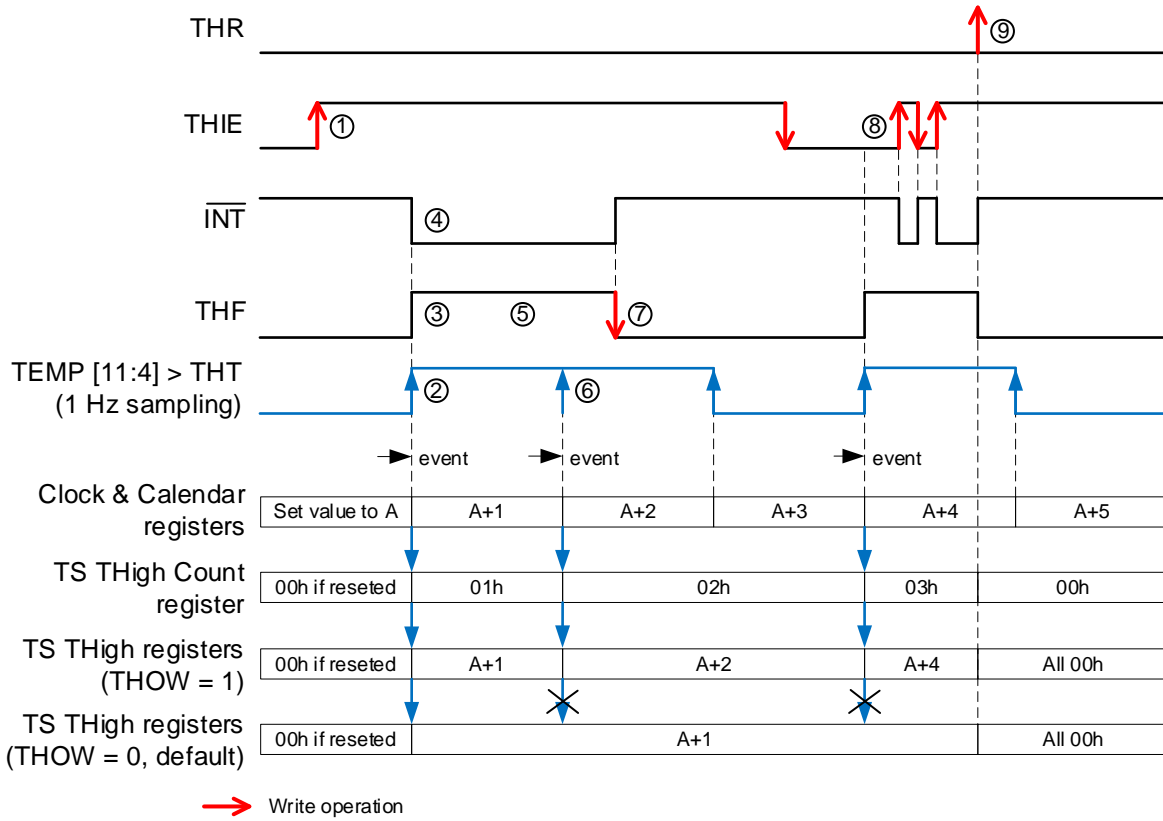

- ① Initialize clock and calendar if a Time Stamp from the THigh Interrupt function is needed and select THOW (0 or 1). Enter the desired Temperature High Threshold value THT. Set THIE bit to 1 if interrupt on $\overline{\text{INT}}$ pin is required. The THF flag needs to be cleared to reset the $\overline{\text{INT}}$ pin and to prepare the system for an event.
- ② A THigh event is detected. The value (A+1) is captured/copied into the TS THigh registers and the value in the TS THigh Count register is incremented by one. The TS THigh Count register always counts events, regardless of the settings of the override bit THOW.
- ③ When a THigh Interrupt occurs, the THF flag is set to 1.
- ④ If the THIE bit is 1 and a THigh Interrupt occurs, the $\overline{\text{INT}}$ pin output goes LOW.
- ⑤ The THF flag retains 1 until it is cleared to 0 by software.
- ⑥ No interrupt occurs on $\overline{\text{INT}}$ pin because the THF flag was not set back to 0. But, new value (A+2) is captured in the TS THigh registers if the Time Stamp overwrite bit THOW is set to 1.
- ⑦ If the $\overline{\text{INT}}$ pin is low, its status changes as soon as the THF flag is cleared to 0, even if $\text{TEMP [11:4]} > \text{THT}$.
- ⑧ While the THF flag is 1, the $\overline{\text{INT}}$ status can be controlled by the THIE bit.
- ⑨ When writing 1 to THR bit, all seven time stamp registers (TS THigh Count to TS THigh Year) are reset to 00h. The THF flag is also cleared to 0 when writing 1 to the THR bit and $\overline{\text{INT}}$ pin goes high impedance. Bit THR always returns 0 when read.

Note that the THF and TLF flags are always reset whenever the register 0Dh Status is written to (using 0s or 1s).

4.13.2. USE OF THE TEMPERATURE HIGH INTERRUPT

The following registers and bits are related to the Temperature LHigh Interrupt, THigh Time Stamp and Interrupt Controlled Clock Output functions:

- Seconds Register (01h) (see CLOCK REGISTERS)
- Minutes Register (02h) (see CLOCK REGISTERS)
- Hours Register (03h) (see CLOCK REGISTERS)
- Date Register (05h) (see CALENDAR REGISTERS)
- Month Register (06h) (see CALENDAR REGISTERS)
- Year Register (07h) (see CALENDAR REGISTERS)
- THigh Threshold Register (17h) (see TEMPERATURE THRESHOLDS REGISTERS)
- TS THigh Count Register (1Fh) (see TIME STAMP THIGH REGISTERS)
- TS THigh Seconds (20h) (see TIME STAMP THIGH REGISTERS)
- TS THigh Minutes (21h) (see TIME STAMP THIGH REGISTERS)
- TS THigh Hours (22h) (see TIME STAMP THIGH REGISTERS)
- TS THigh Date (23h) (see TIME STAMP THIGH REGISTERS)
- TS THigh Month (24h) (see TIME STAMP THIGH REGISTERS)
- TS THigh Year (25h) (see TIME STAMP THIGH REGISTERS)
- THF flag (see STATUS REGISTER, 0Dh – Status)
- THE and THIE bits (see CONTROL REGISTERS, 12h – Control 3)
- THR and THOW bits (see TIME STAMP CONTROL REGISTER, 13h – Time Stamp Control)
- INTDE and CTHIE bits (see CLOCK INTERRUPT MASK REGISTER, 14h – Clock Interrupt Mask)

See also INTERRUPT CONTROLLED CLOCK OUTPUT.

Prior to entering any timer settings for the Temperature High Interrupt, it is recommended to write a 0 to the THE and THIE bits to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin. When the STOP bit value is 1, the Temperature High Interrupt function cannot provide new data because the 1 Hz tick is stopped and because temperature measurement, temperature compensation and temperature comparison with the THT value is stopped. When writing to the Seconds register or when the ESYN bit is 1 in case of an External Event detection on EVI pin the time is synchronized and the 100th Seconds register is reset to 00 (see TIME SYNCHRONIZATION).

When the Temperature High Interrupt function is not used, the THigh Threshold register (17h) can be used as RAM byte. In such case, be sure to write a 0 to the THE and THIE bits (if the THE and THIE bit values are 1 and the THigh Threshold register is used as RAM register, $\overline{\text{INT}}$ may change to low level unintentionally).

Procedure to use the Temperature High Interrupt, THigh Time Stamp and Interrupt Controlled Clock Output functions:

1. Initialize bits THE and THIE to 0.
2. Clear flag THF to 0.
3. Enter the desired Temperature High Threshold value THT.
4. Set THOW bit to 1 if the last occurred event has to be recorded and TS THigh registers are overwritten.
Hint: The TS THigh Count register always counts events, regardless of the settings of the override bit THOW.
5. Write 1 to THR bit, to reset all Time Stamp THigh registers to 00h. With this reset, the THF flag is also automatically reset to 0. The THR bit always returns 0 when read.
6. Set CTHIE bit to 1 if you want to enable clock output when temperature high interrupt occurs. See also CLOCK OUTPUT SCHEME.
7. Set INTDE bit to 1 if you want to enable interrupt Delay after CLKOUT On.
8. Set THIE bit to 1 if you want to get a hardware interrupt on $\overline{\text{INT}}$ pin or if you want to use the Interrupt Controlled Clock Output function.
9. Set the THE bit from 0 to 1 to start the Temperature High detection.

Note that the THF and TLF flags are always reset whenever the register 0Dh Status is written to (using 0s or 1s).

4.14. AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION

The Automatic Backup Switchover Interrupt function generates an interrupt event when the BSM field (EEPROM C0h) is set to 01 (DSM) or 10 (LSM) and a switchover from VDD Power state to VBACKUP Power state occurs.


If enabled (BSIE = 1 and BSF flag was cleared to 0 before) and a Backup Switchover is detected, the $\overline{\text{INT}}$ is issued and the BSF flag is set to 1 to indicate that a Backup Switchover has occurred.

A debounce logic provides a debounce time t_{DEB} which will filter V_{DD} oscillation when switchover function will switch back from V_{BACKUP} to V_{DD} . I²C access is again possible in VDD Power state (and if $V_{\text{DD}} \geq 1.4 \text{ V}$) after the debounce time t_{DEB} .

- $t_{\text{DEB MAX}} = 1 \text{ ms}$, when internal voltage was always above V_{LOW} (typical 1.2 V). VLF = 0.
- $t_{\text{DEB MAX}} = 1000 \text{ ms}$, when internal voltage was between V_{LOW} (typical 1.2 V) and V_{POR} (maximum 1.05 V). VLF = 1. See also BACKUP AND RECOVERY AC ELECTRICAL CHARACTERISTICS.

4.14.1. AUTOMATIC BACKUP SWITCHOVER DIAGRAM

Diagram of the Automatic Backup Switchover Interrupt function:

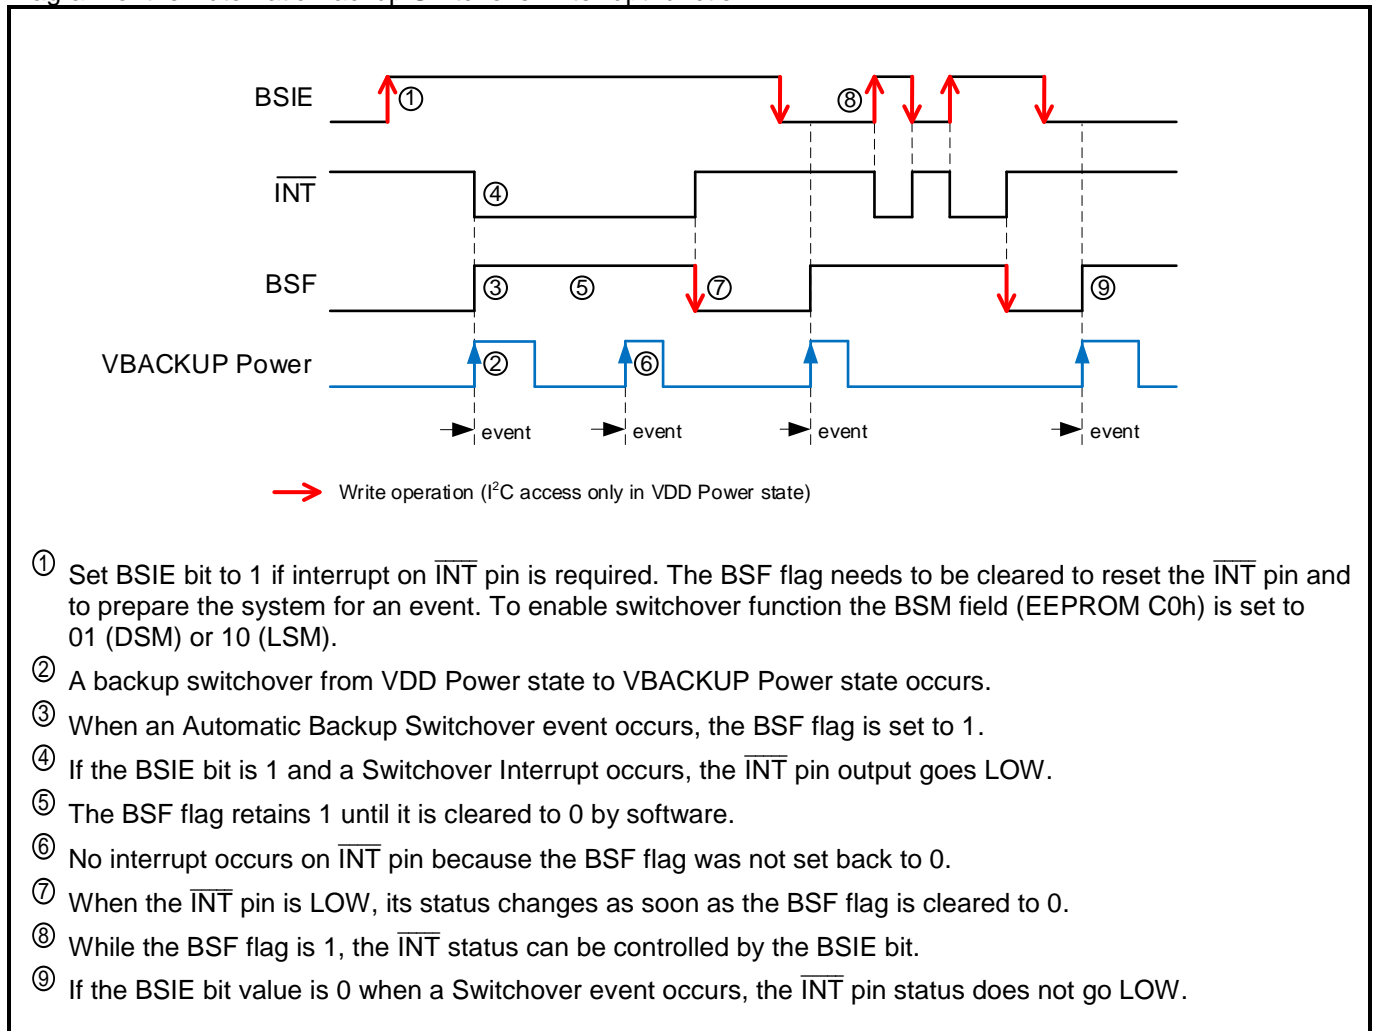

4.14.2. USE OF THE AUTOMATIC BACKUP SWITCHOVER INTERRUPT

The following field and bits are related to the Automatic Backup Switchover Interrupt function:

- BSF flag (see TEMPERATURE REGISTERS, 0Eh – Temperature LSBs)
- BSIE bit (see CONTROL REGISTERS, 12h – Control 3)
- BSM field (see EEPROM PMU REGISTER, C0h – EEPROM PMU)

See also EEPROM READ/WRITE.

Prior to entering any other settings, it is recommended to write a 0 to the BSIE bit to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin.

Procedure to use the Automatic Backup Switchover Interrupt function:


1. Initialize bit BSIE to 0.
2. Clear flag BSF to 0.
3. Choose the Backup Switchover Mode (DSM or LSM) and write the corresponding value in the BSM field.
4. Set the BSIE bit to 1 if you want to get a hardware interrupt on $\overline{\text{INT}}$ pin.

4.15. POWER ON RESET INTERRUPT FUNCTION

The Power On Reset Interrupt function is enabled by the PORIE control bit (EEPROM C1h). The PORIE bit has to be set beforehand in the EEPROM, not only in the RAM (see EEPROM READ/WRITE). When a V_{DD} startup from below V_{POR} (TYP 0.95 V) in VDD Power state is detected, the PORF flag is set to 1 to indicate that a Power On Reset has occurred and when the PORIE bit is 1 the \overline{INT} pin goes to low level. The data in the device are no longer valid and all registers must be initialized. The value 1 is retained until a 0 is written by the user. See also POWER ON AC ELECTRICAL CHARACTERISTICS.

4.15.1. POWER ON RESET DIAGRAM

Diagram of the Power On Reset Interrupt function: Example with Power On Reset Interrupt and CLKOUT enabled.

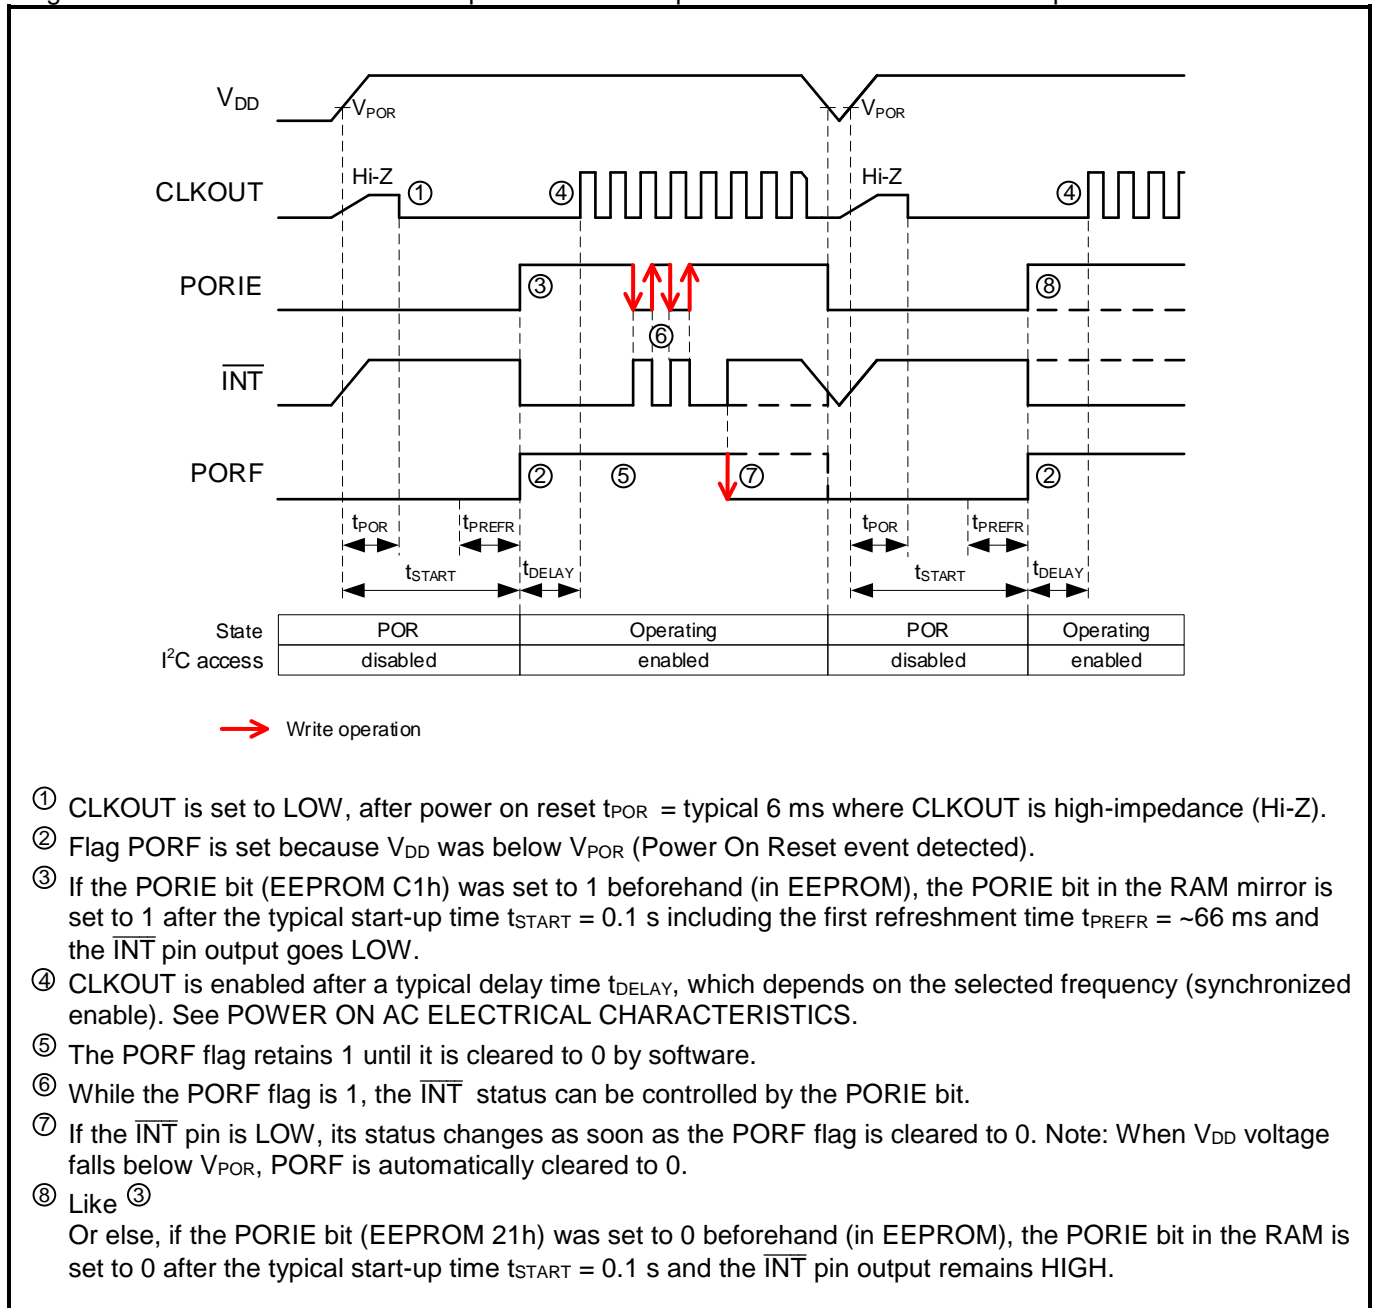

4.15.2. USE OF THE POWER ON RESET INTERRUPT

The following registers and bits are related to the Power On Reset Interrupt function:

- PORF flag (see STATUS REGISTER, 0Dh – Status)
- PORIE bit (see EEPROM OFFSET REGISTER, C1h – EEPROM Offset)

See also EEPROM READ/WRITE.

The PORIE bit has to be set beforehand in the EEPROM, not in the RAM.

Procedure to use the Power On Reset Interrupt function:

1. In the EEPROM, set the PORIE bit to 1 if you want to get a hardware interrupt on $\overline{\text{INT}}$ pin at the next Power On Reset event. Procedure according to EEPROM READ/WRITE.
2. The first interrupt will occur after the next POR event.


4.16. VOLTAGE LOW INTERRUPT FUNCTION

The Voltage Low Interrupt function generates an interrupt event when a voltage drop of the internal power supply voltage below V_{LOW} (typical 1.2 V) is detected. The sampling frequency is 1 Hz. If the internal voltage (V_{DD} or V_{BACKUP}) is below V_{LOW} , the temperature compensation is stopped, CLKOUT is LOW and the I²C interface is disabled ($V_{DD} < 1.4$ V). The interrupt enable bit VLIE is located in the EEPROM Register C1h.

If enabled (VLIE = 1 and VLF flag was cleared to 0 before) and a voltage drop below V_{LOW} is detected, the \overline{INT} is issued and the VLF flag is set to 1 to indicate that a Voltage Low event has occurred. The VLF value of 1 indicates that the data in the device may no longer be valid and all registers should be reinitialized. The value 1 is retained until a 0 is written by the user (no automatic cancellation). If the internal voltage is below V_{LOW} , the temperature compensation is stopped, CLKOUT is LOW and the I²C interface is disabled ($V_{DD} < 1.4$ V).

4.16.1. VOLTAGE LOW DIAGRAM

Diagram of the Voltage Low Interrupt function: Example with CLKOUT enabled.

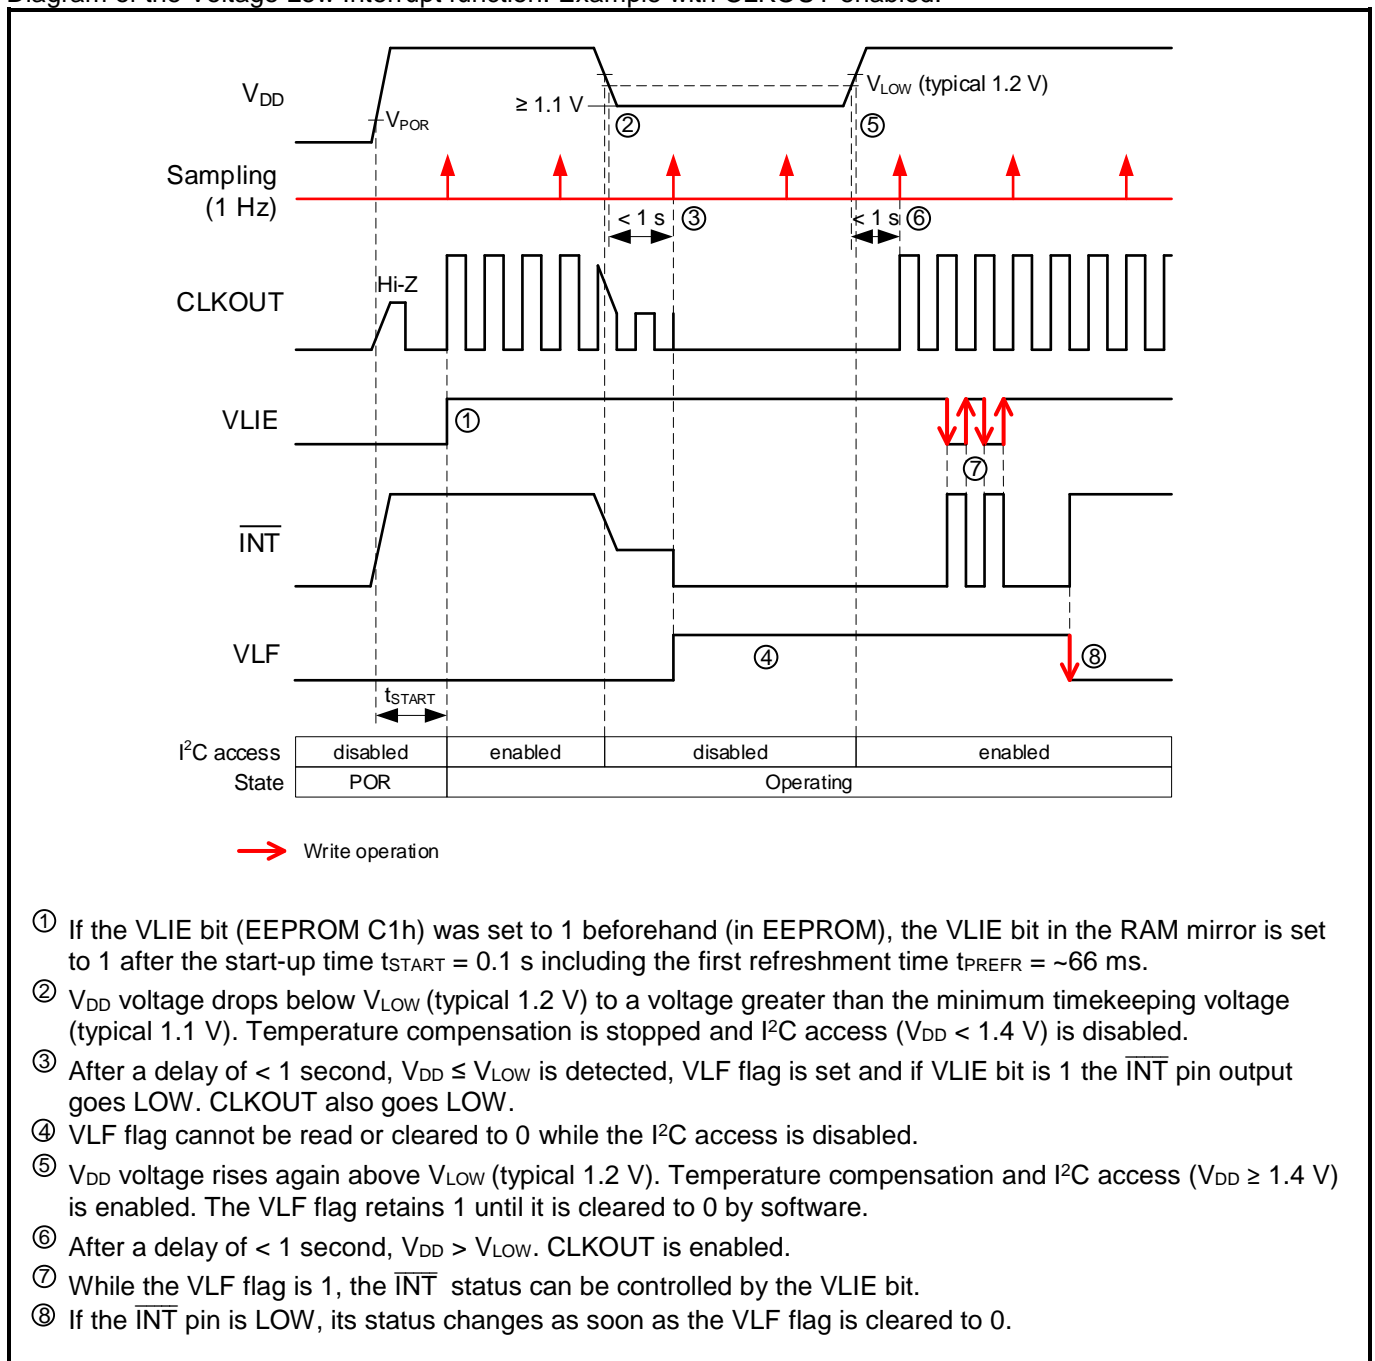

4.16.2. USE OF THE VOLTAGE LOW INTERRUPT

The following bits are related to the Voltage Low Interrupt function:

- VLF flag (see STATUS REGISTER, 0Dh – Status)
- VLIE bit (see EEPROM OFFSET REGISTER, C1h – EEPROM Offset)

See also EEPROM READ/WRITE.

Prior to entering any other settings, it is recommended to write a 0 to the VLIE bit to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin.

Procedure to use the Voltage Low Interrupt function:

1. Initialize bit VLIE to 0.
2. Clear flag VLF to 0.
3. Set the VLIE bit to 1 if you want to get a hardware interrupt on $\overline{\text{INT}}$ pin.

Application note: Since the Voltage Low Interrupt function can only detect a slow voltage sink rate (e.g. $< 0.1 \text{ V/s}$), it is used as a low battery or an end-of-life (EOL) indicator. The Voltage Low signal can be output via the $\overline{\text{INT}}$ pin.

- Note that the POR generated at startup has the VLF flag automatically cleared to 0. Should the power-up time erroneously exceed to long, a low voltage can be detected between V_{POR} and V_{LOW} (VLF flag is set).
- Note that the sampling frequency of the internal voltage (V_{DD} or V_{BACKUP}) is 1 Hz.
- Note that the Voltage Low Interrupt function cannot be used for a fast voltage drop detection.

Example of rapid voltage changes (in the VDD Power state to show CLKOUT behavior):

- If the voltage drops rapidly from $V_{\text{DD}} > V_{\text{LOW}}$ to $V_{\text{DD}} \leq V_{\text{POR}}$, sampling is missed and no interrupt is generated (VLF flag not set). CLKOUT turns off immediately.
- When V_{DD} rises again rapidly from $V_{\text{DD}} \leq V_{\text{POR}}$ to $V_{\text{DD}} > V_{\text{LOW}}$, sampling is missed and no interrupt is generated (VLF flag not set). But as an exception, CLKOUT turns on immediately and not with the usual latency due to the 1 Hz sampling.

4.17. TIME STAMP EVI FUNCTION

The Time Stamp EVI function is always working (except in VBACKUP Power state).

When an External Event on EVI pin is detected, the clock and calendar registers are captured and copied into the Time Stamp EVI registers. When the EVOW bit is set to 0 and if the Time Stamp EVI registers were previously initialized to zero by writing 1 to the EVR bit, only one (the first) event is recorded. When the EVOW bit is set to 1, the last occurred event is recorded and TS EVI registers (TS EVI 100th Seconds to TS EVI Year) are overwritten. The TS EVI Count register always counts events, regardless of the settings of the override bit EVOW.

When writing 1 to EVR bit, all eight time stamp registers (TS EVI Count to TS EVI Year) are reset to 00h. Bit EVR can be left at 1. Writing or overwriting a 1 causes reset. Hint: When EVI pin = HIGH, all Time Stamp EVI registers are also reset to 00h at POR. Before using the Time Stamp EVI function, it is recommended to write 1 to EVR bit.

When STOP bit is set to 1 the interrupt function is still working, but because the 1 Hz tick is stopped and 100th Seconds register is reset to 00, it cannot provide useful data. When writing to the Seconds register or when the ESYN bit is 1 in case of an External Event detection on EVI pin the time is synchronized and the 100th Seconds register is reset to 00 (the ESYN bit function does first the Time Stamp EVI, then clears 100th Seconds register) (see TIME SYNCHRONIZATION).

Procedure for using the Time Stamp EVI function:


1. Initialize bit EIE to 0.
2. Select EVOW (0 or 1) and clear EVF flag.
3. Write 1 to EVR bit, to reset all Time Stamp EVI registers to 00h. EVR may remain set. No further reset occurs.
Hint: EVF flag is not reset by the EVR bit function.
4. Initialize the EXTERNAL EVENT INTERRUPT FUNCTION.

Hint: The $\overline{\text{INT}}$ signal is issued when EIE bit is set to 1. The EVF flag is set to 1 to indicate that an external event has occurred.

Caution: For the Time Stamp EVI function, only the TS EVI Count register is responsible for detecting first or last event (EVOW), and therefore, always after an overflow of the TS EVI Count register from 255 to 0, a new First Event is allowed by the function (see also TIME STAMP EVI SCHEME).

4.17.1. TIME STAMP EVI SCHEME

Time Stamp EVI scheme:

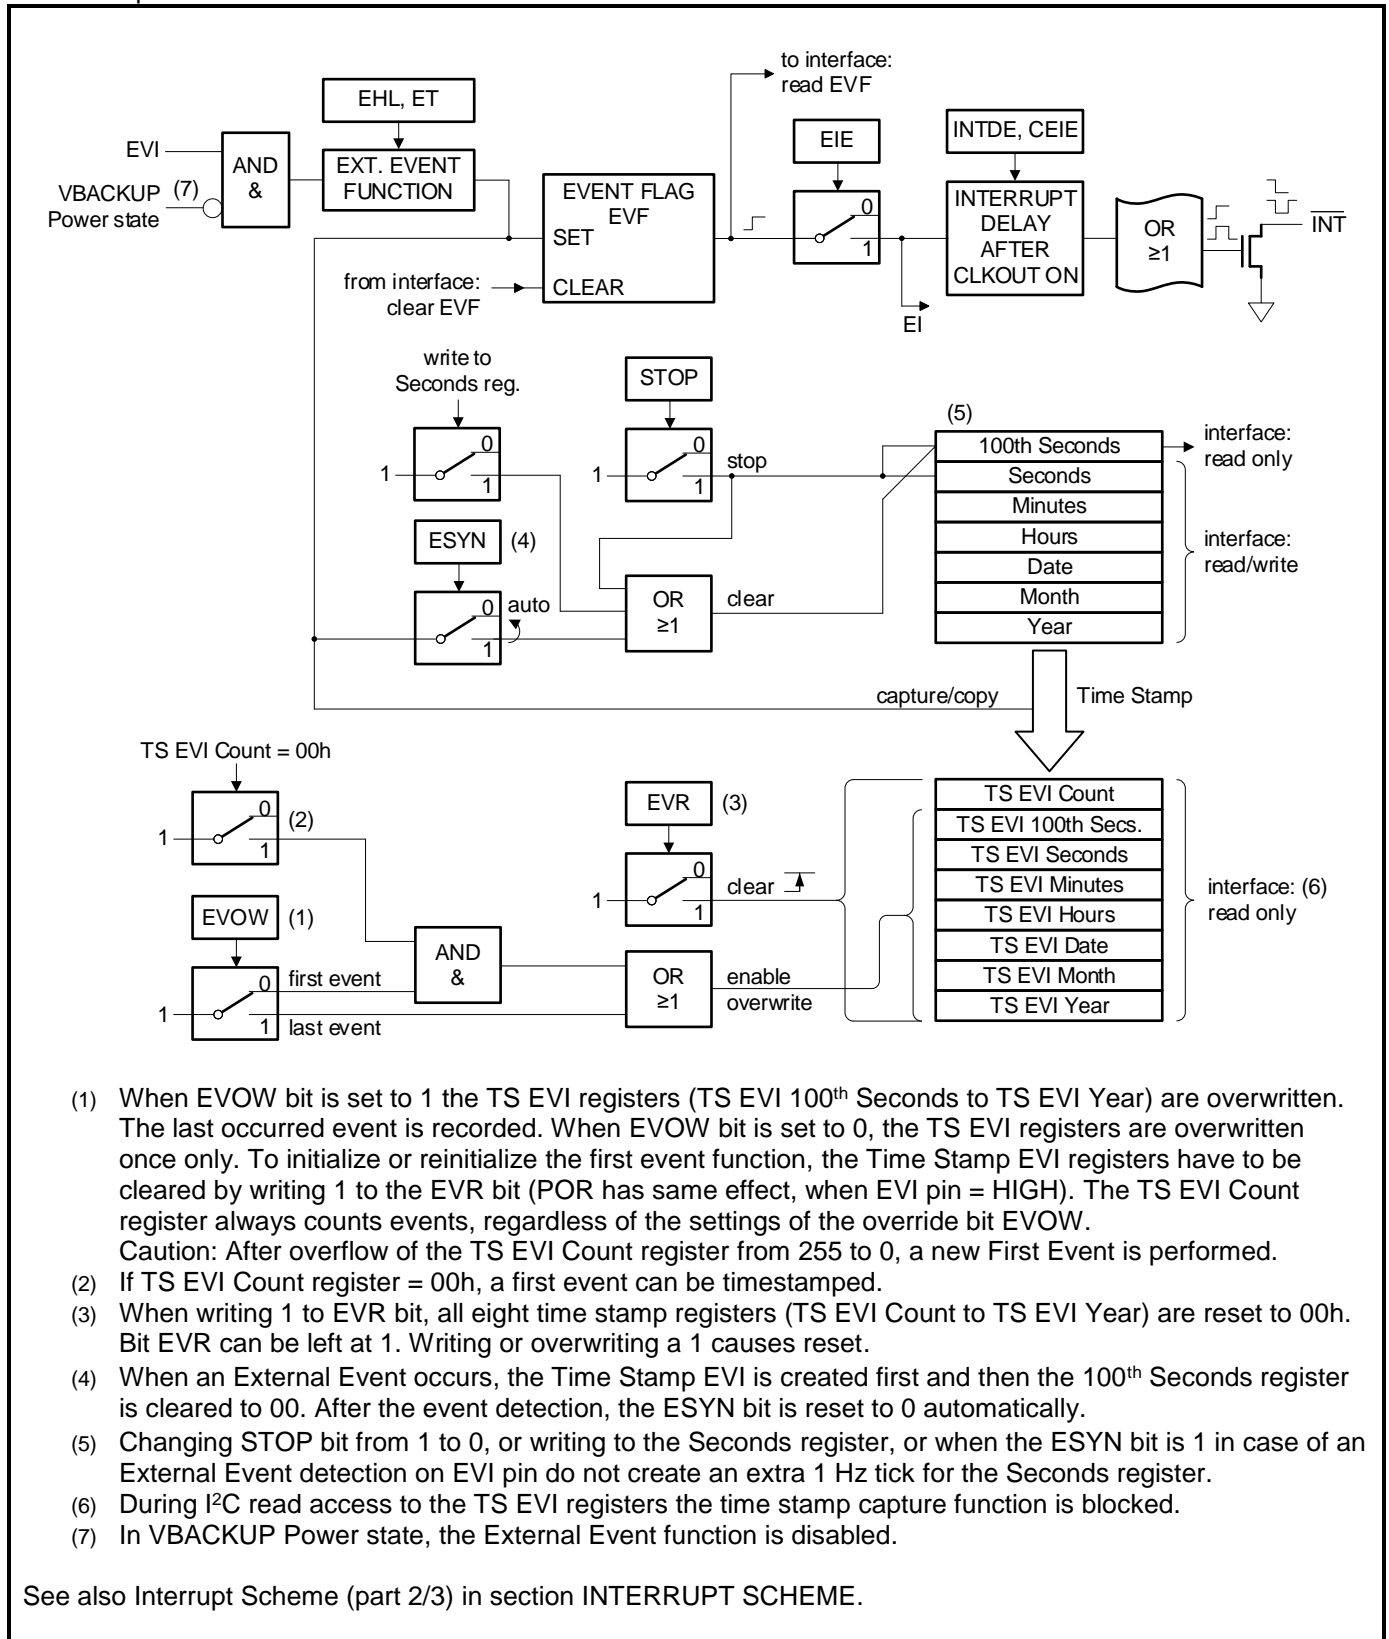

4.18. TIME STAMP TLOW FUNCTION

The Time Stamp TLow function is enabled by the control bit TLE.

If $TEMP[11:4] < TLT$ is detected (automatic temperature measurement is carried out once per second), the clock and calendar registers are captured and copied into the Time Stamp TLow registers. When the TLOW bit is set to 0 and if the Time Stamp TLow registers were previously initialized to zero by writing 1 to the TLR bit, only one (the first) event is recorded. When the TLOW bit is set to 1, the last occurred event is recorded and TS TLow registers (TS TLow Seconds to TS TLow Year) are overwritten. The TS TLow Count register always counts events, regardless of the settings of the override bit TLOW.

When writing 1 to TLR bit, all seven time stamp registers (TS TLow Count to TS TLow Year) are reset to 00h and the TLF flag is automatically cleared to 0. The TLR bit always returns 0 when read. Hint: All Time Stamp TLow registers are also reset to 00h at POR. Before using the Time Stamp TLow function, it is recommended to write 1 to TLR bit.

When the STOP bit value is 1, the Temperature Low Interrupt function cannot provide new data because the 1 Hz tick is stopped and because temperature measurement, temperature compensation and temperature comparison with the TLT value is stopped. When writing to the Seconds register or when the ESYN bit is 1 in case of an External Event detection on EVI pin the time is synchronized and the 100th Seconds register is reset to 00 (see TIME SYNCHRONIZATION).

Procedure for using the Time Stamp TLow function:

1. Initialize bits TLE and TLIE to 0.
2. Select TLOW (0 or 1) and clear TLF flag (or automatically done in the following step).
3. Write 1 to TLR bit, to reset all Time Stamp TLow registers to 00h. The TLF flag is automatically cleared to 0 when writing 1 to the TLR bit. Bit TLR always returns 0 when read.
4. Initialize the TEMPERATURE LOW INTERRUPT FUNCTION.
5. Set the TLE bit to 1 to enable the Time Stamp TLow function.


Hint: The \overline{INT} signal is issued when TLIE bit is set to 1. The TLF flag is set to 1 to indicate that a temperature low event has occurred.

Hint: For the Time Stamp TLow function, all TS TLow registers are responsible for detecting first or last event (TLOW). When all TS TLow registers are 00h a First Event is allowed by the function. See also the following scheme:

Note that the THF and TLF flags are always reset whenever the register 0Dh Status is written to (using 0s or 1s).

4.18.1. TIME STAMP TLOW SCHEME

Time Stamp TLow scheme:

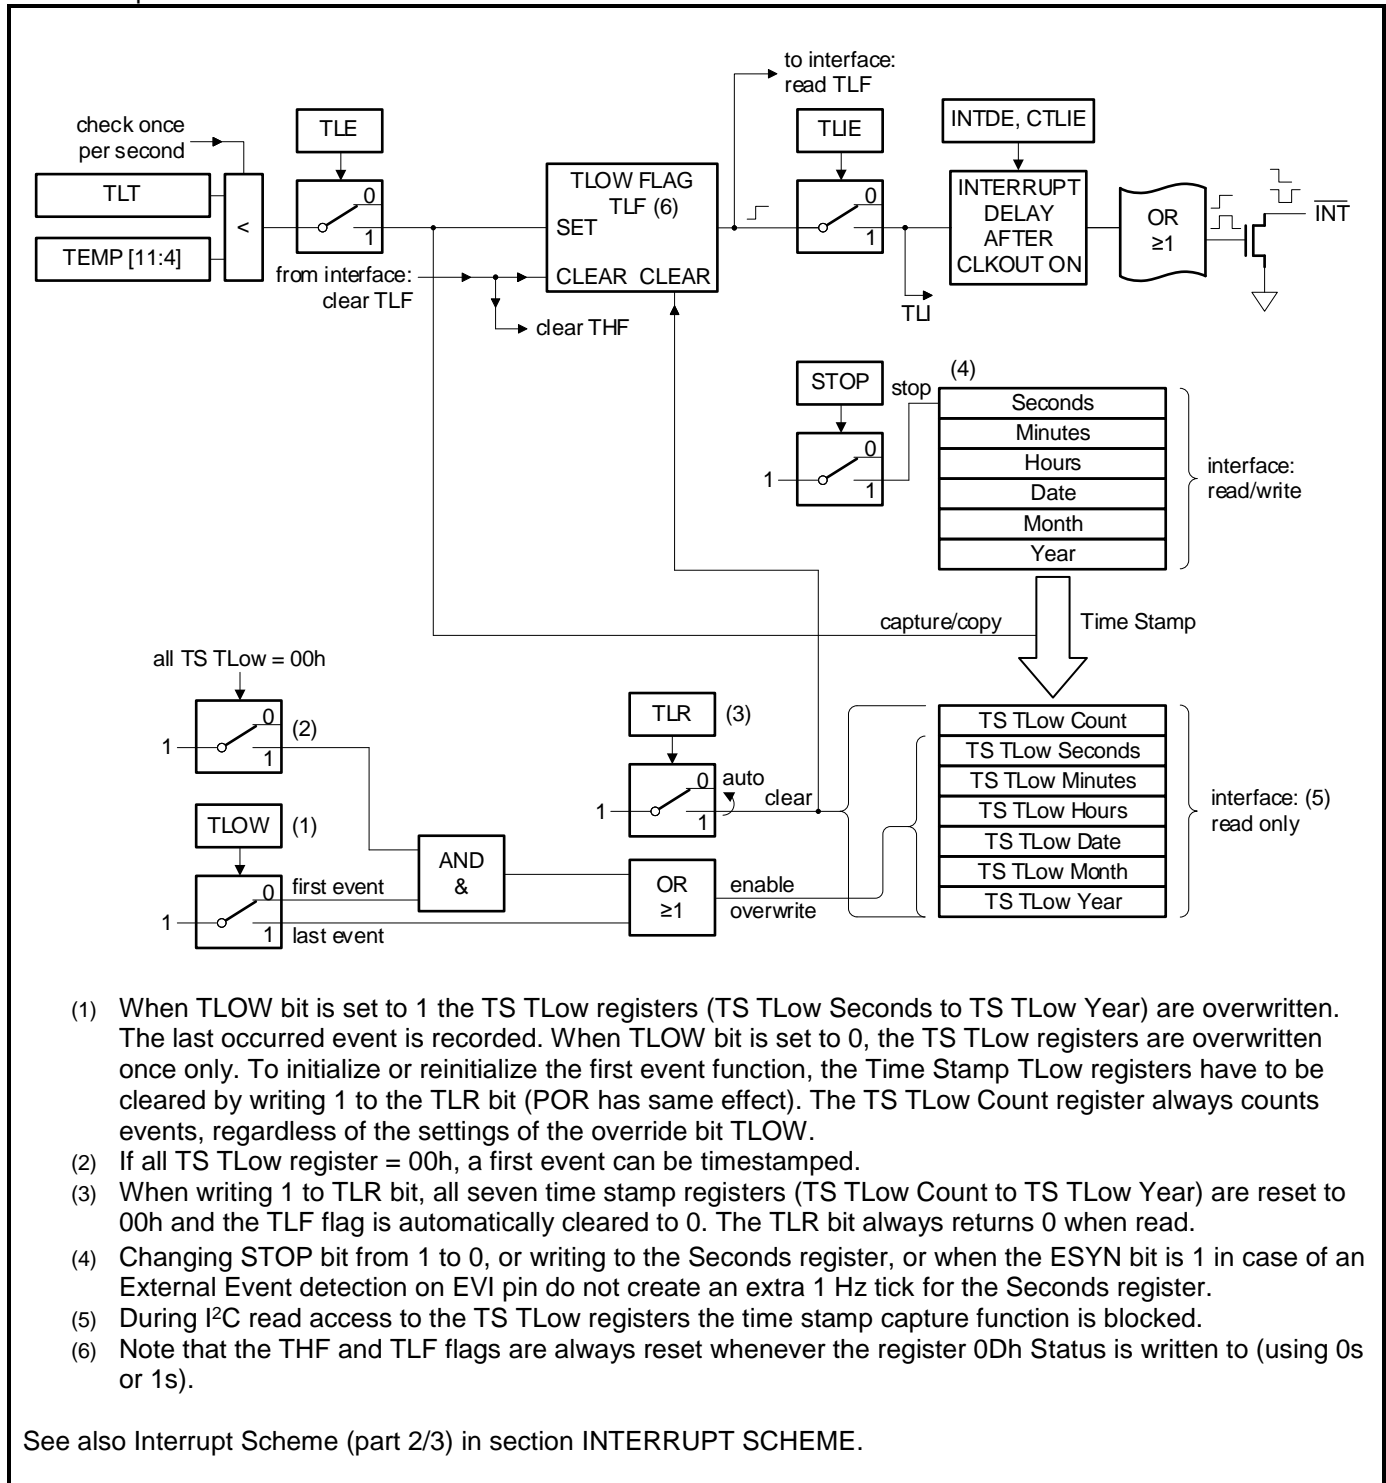

- (1) When TLOW bit is set to 1 the TS TLow registers (TS TLow Seconds to TS TLow Year) are overwritten. The last occurred event is recorded. When TLOW bit is set to 0, the TS TLow registers are overwritten once only. To initialize or reinitialize the first event function, the Time Stamp TLow registers have to be cleared by writing 1 to the TLR bit (POR has same effect). The TS TLow Count register always counts events, regardless of the settings of the override bit TLOW.
- (2) If all TS TLow register = 00h, a first event can be timestamped.
- (3) When writing 1 to TLR bit, all seven time stamp registers (TS TLow Count to TS TLow Year) are reset to 00h and the TLF flag is automatically cleared to 0. The TLR bit always returns 0 when read.
- (4) Changing STOP bit from 1 to 0, or writing to the Seconds register, or when the ESYN bit is 1 in case of an External Event detection on EVI pin do not create an extra 1 Hz tick for the Seconds register.
- (5) During I²C read access to the TS TLow registers the time stamp capture function is blocked.
- (6) Note that the THF and TLF flags are always reset whenever the register 0Dh Status is written to (using 0s or 1s).

See also Interrupt Scheme (part 2/3) in section INTERRUPT SCHEME.

4.19. TIME STAMP THIGH FUNCTION

The Time Stamp THigh function is enabled by the control bit THE.

If $TEMP[11:4] > THT$ is detected (automatic temperature measurement is carried out once per second), the clock and calendar registers are captured and copied into the Time Stamp THigh registers. When the THOW bit is set to 0 and if the Time Stamp THigh registers were previously initialized to zero by writing 1 to the THR bit, only one (the first) event is recorded. When the THOW bit is set to 1, the last occurred event is recorded and TS THigh registers (TS THigh Seconds to TS THigh Year) are overwritten. The TS THigh Count register always counts events, regardless of the settings of the override bit THOW.

When writing 1 to THR bit, all seven time stamp registers (TS THigh Count to TS THigh Year) are reset to 00h and the THF flag is automatically cleared to 0. The THR bit always returns 0 when read. Hint: All Time Stamp THigh registers are also reset to 00h at POR. Before using the Time Stamp THigh function, it is recommended to write 1 to THR bit.

When the STOP bit value is 1, the Temperature High Interrupt function cannot provide new data because the 1 Hz tick is stopped and because temperature measurement, temperature compensation and temperature comparison with the THT value is stopped. When writing to the Seconds register or when the ESYN bit is 1 in case of an External Event detection on EVI pin the time is synchronized and the 100th Seconds register is reset to 00 (see TIME SYNCHRONIZATION).

Procedure for using the Time Stamp THigh function:

1. Initialize bits THE and THIE to 0.
2. Select THOW (0 or 1) and clear THF flag (or automatically done in the following step).
3. Write 1 to THR bit, to reset all Time Stamp THigh registers to 00h. The THF flag is automatically cleared to 0 when writing 1 to the THR bit. Bit THR always returns 0 when read.
4. Initialize the TEMPERATURE HIGH INTERRUPT FUNCTION.
5. Set the THE bit to 1 to enable the Time Stamp THigh function.


Hint: The \overline{INT} signal is issued when THIE bit is set to 1. The THF flag is set to 1 to indicate that a temperature high event has occurred.

Hint: For the Time Stamp THigh function, all TS THigh registers are responsible for detecting first or last event (THOW). When all TS THigh registers are 00h a First Event is allowed by the function. See also the following scheme:

Note that the THF and TLF flags are always reset whenever the register 0Dh Status is written to (using 0s or 1s).

4.19.1. TIME STAMP THIGH SCHEME

Time Stamp THigh scheme:

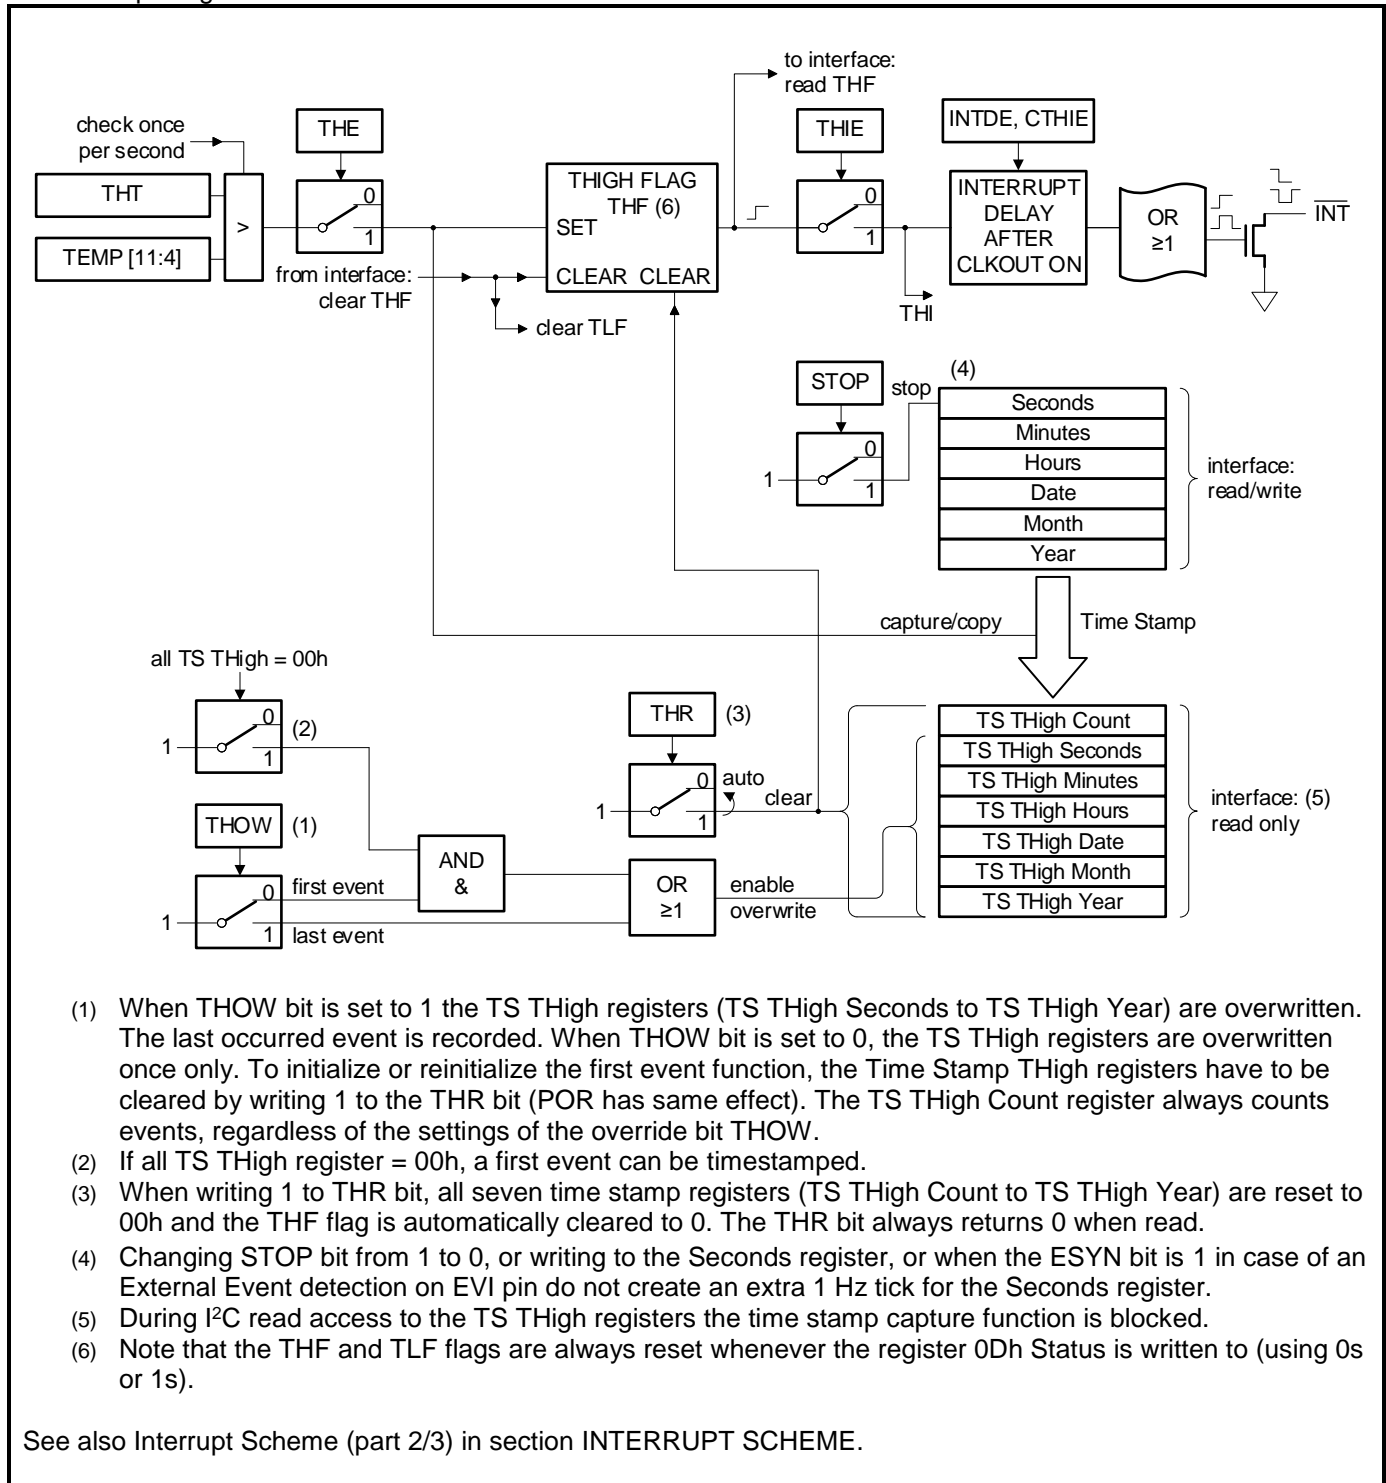

- (1) When THOW bit is set to 1 the TS THigh registers (TS THigh Seconds to TS THigh Year) are overwritten. The last occurred event is recorded. When THOW bit is set to 0, the TS THigh registers are overwritten once only. To initialize or reinitialize the first event function, the Time Stamp THigh registers have to be cleared by writing 1 to the THR bit (POR has same effect). The TS THigh Count register always counts events, regardless of the settings of the override bit THOW.
- (2) If all TS THigh register = 00h, a first event can be timestamped.
- (3) When writing 1 to THR bit, all seven time stamp registers (TS THigh Count to TS THigh Year) are reset to 00h and the THF flag is automatically cleared to 0. The THR bit always returns 0 when read.
- (4) Changing STOP bit from 1 to 0, or writing to the Seconds register, or when the ESYN bit is 1 in case of an External Event detection on EVI pin do not create an extra 1 Hz tick for the Seconds register.
- (5) During I²C read access to the TS THigh registers the time stamp capture function is blocked.
- (6) Note that the THF and TLF flags are always reset whenever the register 0Dh Status is written to (using 0s or 1s).

See also Interrupt Scheme (part 2/3) in section INTERRUPT SCHEME.

4.20. TEMPERATURE REFERENCE ADJUSTMENT

The Temperature Reference 16-bit value TREF can be used to calibrate the Temperature value TEMP of the Digital Thermometer. The adjustment of TREF is purely digital and has only the effect of shifting the linear curve of the thermometer vertically up or down. This is a one-point setting and is usually made at room temperature for post PCB soldering temperature variation compensation. The change in TREF has no effect on the temperature compensation of the RTC.

The TREF value contains a two's complement number with a minimum adjustment step (one LSB) of $\pm 1/128 = \pm 0.0078125^\circ\text{C}$. The preconfigured (Factory Calibrated) TREF value may be changed by the user (see EEPROM TEMPERATURE REFERENCE REGISTERS). Note the following special formulas for conversion to $^\circ\text{C}$ and back.

4.20.1. TREF VALUE DETERMINATION

The following registers and fields are related to the Temperature Reference value TREF:

- TEMP [3:0] field (see TEMPERATURE REGISTERS, 0Eh – Temperature LSBs)
- TEMP [11:4] field (see TEMPERATURE REGISTERS, 0Fh – Temperature MSBs)
- TREF [7:0] field (see EEPROM TEMPERATURE REFERENCE REGISTERS, C4h – EEPROM TReference 0)
- TREF [15:8] field (see EEPROM TEMPERATURE REFERENCE REGISTERS, C5h – EEPROM TReference 1)

See also EEPROM READ/WRITE.

Formulas for conversion from 16-bit TREF value to TREF value in $^\circ\text{C}$ and back (see also table below):

$$\text{TREF in } ^\circ\text{C} = \left(\frac{\text{TREF}}{128} - 0.5 \right) ^\circ\text{C}$$

$$\text{TREF} = (\text{TREF in } ^\circ\text{C} + 0.5^\circ\text{C}) \times \frac{128}{^\circ\text{C}}$$

A new 16-bit reference value TREF is determined by the following process:

1. Make an exact temperature measurement Ttarget in $^\circ\text{C}$ with an external temperature measurement device at room temperature and read out the 12-bit TEMP value of the temperature registers at the same time. The measurement sensor for Ttarget must be as close as possible to the RTC.
2. Convert the 12-bit TEMP value into the TEMP value in $^\circ\text{C}$ (see TEMPERATURE REGISTERS).
3. Calculate the temperature difference $\Delta T = T_{\text{target}} - \text{TEMP}$, all in $^\circ\text{C}$.
4. Read the 16-bit TREF value.
5. Convert the TREF value in $^\circ\text{C}$ (see formula above).
6. Calculate the new TREF = TREF + ΔT , all in $^\circ\text{C}$.
7. Convert the new TREF value in $^\circ\text{C}$ into the 16-bit TREF value (see formula above).
8. Write the new TREF value to the registers.

Example:

1. Ttarget = 26°C , TEMP = 384d
2. TEMP = $384/16 = 24^\circ\text{C}$
3. $\Delta T = T_{\text{target}} - \text{TEMP} = 26^\circ\text{C} - 24^\circ\text{C} = +2^\circ\text{C}$
4. TREF = 3059d
5. TREF = $(3059/128 - 0.5)^\circ\text{C} = 23.3984375^\circ\text{C}$
6. New TREF = TREF + $\Delta T = 23.3984375^\circ\text{C} + 2^\circ\text{C} = 25.3984375^\circ\text{C}$
7. New TREF = $(\text{new TREF in } ^\circ\text{C} + 0.5^\circ\text{C}) \times 128/^\circ\text{C} = (25.3984375^\circ\text{C} + 0.5^\circ\text{C}) \times 128/^\circ\text{C} = 3315\text{d}$
8. New TREF = 3315d

TREF (16 bits) examples:

TREF [15:0] value	Hexadecimal	Decimal	(Signed decimal)	TREF in °C(*)
0001'0001'1100'0000	11C0	4544	4544	35
0001'0001'1011'1111	11BF	4543	4543	34.9921875
:	:	:	:	:
0000'1100'1100'0001	0CC1	3265	3265	25.0078125
0000'1100'1100'0000	0CC0	3264	3264	25
0000'1100'1011'1111	0CBF	3263	3263	24.9921875
:	:	:	:	:
0000'0111'1100'0001	07C1	1985	1985	15.0078125
0000'0111'1100'0000	07C0	1984	1984	15

(*) TREF value in °C = (Signed decimal / 128) - 0.5 = (Signed decimal × 0.0078125) - 0.5.

Note that the TREF value (a two's complement value) is used for the calibration of the room temperature value, and not to create a special temperature offset. Therefore, the range of examples is only in the positive range, and only from +15°C to +35°C.

4.21. TIME SYNCHRONIZATION

The time of the RV-3032-C7 can be synchronized in three ways: With the STOP bit, where the 1 Hz tick can be stopped completely, or by writing to the Seconds register, or by the ESYN bit, where the time is synchronized to an external signal.


4.21.1. STOP BIT FUNCTION

The STOP bit function is used for a software-based accurate and safe starting of the time circuits.

The STOP bit is set to 1, the clock prescaler frequencies from 4096 Hz to 1 Hz are stopped and reset and thus no 1 Hz ticks are generated and a possible currently memorized 1 Hz update is also reset. The 100th Seconds register (100 Hz) is reset to 0 also. Because the upper stage of the prescaler is not reset and not stopped (8192 Hz) and the I²C interface is asynchronous, the first 1 Hz period after reset (after setting STOP bit from 1 to 0) will be 0 to 244 μ s shorter than 1 second. Stopping and resetting the prescaler will stop all subsequent peripherals (clock and calendar with alarm, XTAL CLKOUT, timer clock, update timer clock, EVI input filter and temperature measurement, temperature compensation and temperature comparison with THT and TLT values. The External Event Interrupt function is still working but cannot provide useful data.

The STOP bit function will not affect the CLKOUT of 32.768 kHz (see also XTAL CLKOUT FREQUENCY SELECTION).

Scheme of the STOP bit function:

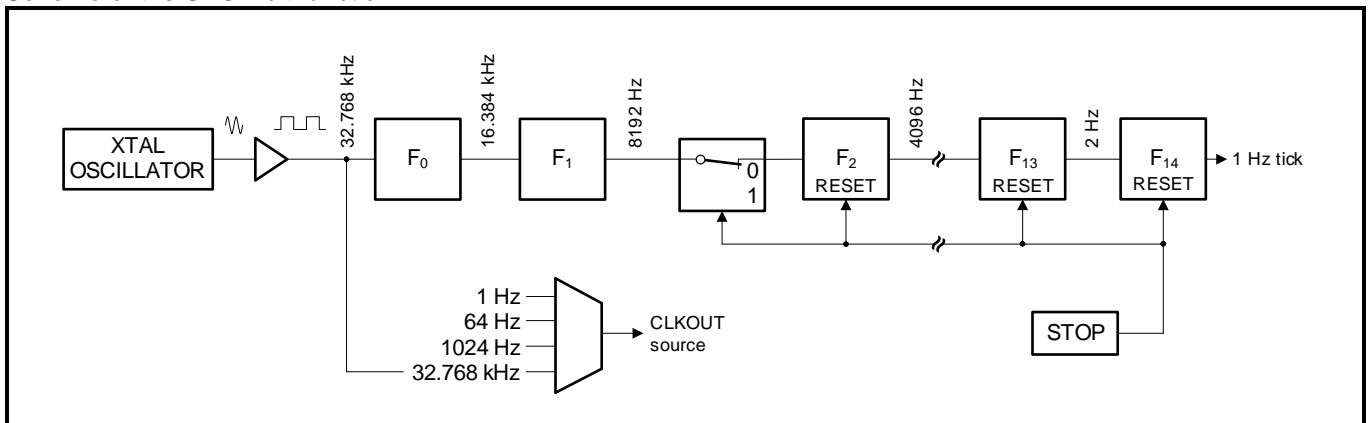


When STOP bit is set, the time registers can be set and do not increment until the STOP bit is released.

Setting the clock and calendar values using the STOP bit function:

1. Set STOP bit to 1 to prevent a timer update while setting the time.
2. Write the desired clock and calendar values to the registers (year, month, date, weekday, hours, minutes and seconds). The 100th Seconds register is automatically cleared to 00 when setting the STOP bit to 1.
3. Release STOP bit to 0 to start the time circuits.
4. The first 1 Hz period is started at the I²C Acknowledge from RV-3032-C7 after writing to the Control 2 register.

Timing of the STOP bit function:

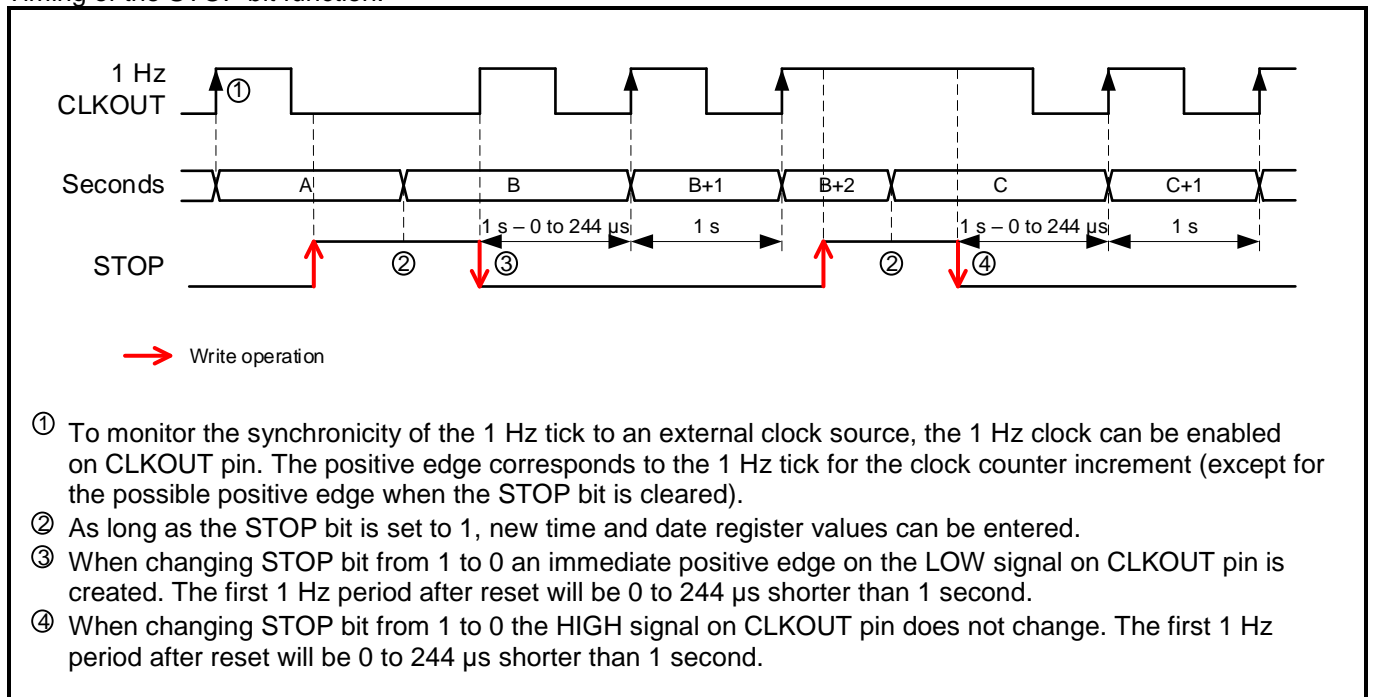


4.21.2. WRITING TO SECONDS REGISTER

Writing to the Seconds register is used for a software-based accurate and safe starting of the time circuits (synchronization).

When writing to the Seconds register, the clock prescaler frequencies from 4096 Hz to 1 Hz are reset and a possible currently memorized 1 Hz update is also reset. The 100th Seconds register (100 Hz) is reset to 0 also. Because the upper stage of the prescaler is not reset (8192 Hz) and the I²C interface is asynchronous, the first 1 Hz period after reset will be 0 to 244 μ s shorter than 1 second. Resetting the prescaler affects the length of the current clock period of all subsequent peripherals (clock and calendar, XTAL CLKOUT, timer clock, update timer clock, temperature sensing and EVI input filter).

Writing to the Seconds register will not affect the CLKOUT of the 32.768 kHz (see also XTAL CLKOUT FREQUENCY SELECTION).


Scheme of the reset function when writing to the Seconds register:

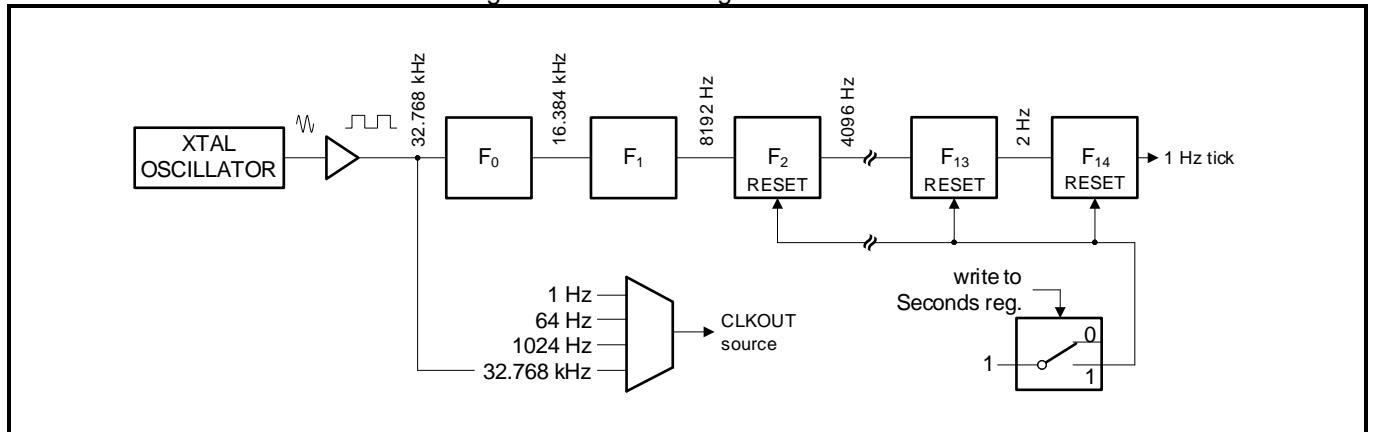

Setting the clock and calendar values using the reset function when writing to the Seconds register:

1. Write the desired clock and calendar values (within 950 ms) to the registers (seconds, minutes, hours, weekday, date, month and year).
2. The first 1 Hz period is started at the I²C Acknowledge from RV-3032-C7 after writing to the Seconds register.

Timing of the reset function when writing to the Seconds register:

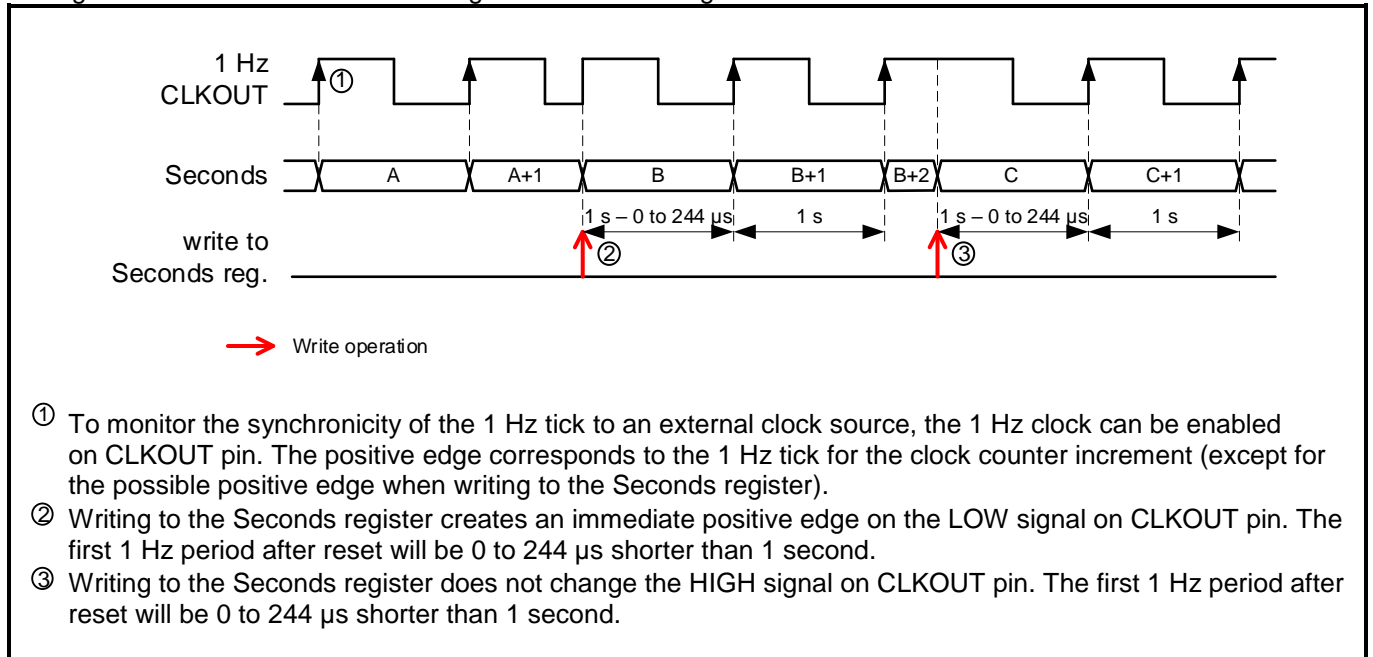


4.21.3. ESYN BIT FUNCTION

The External Event (EVI) Synchronization bit ESYN is used for an external event triggered highly accurate time adjustment (synchronizing).

If the ESYN bit is 1 and in case of an External Event detection on the EVI pin, the clock prescaler frequencies from 4096 Hz to 1 Hz are reset and a possible currently memorized 1 Hz update is also reset. The 100th Seconds register (100 Hz) is reset to 0 also. Because the upper stage of the prescaler is not reset (8192 Hz) and the I²C interface is asynchronous, the first 1 Hz period after reset will be 0 to 244 μs shorter than 1 second. Resetting the prescaler affects the length of the current clock period of all subsequent peripherals (clock and calendar, XTAL CLKOUT, timer clock, update timer clock, temperature sensing and EVI input filter). After the event detection, the ESYN bit is reset to 0 automatically.

The external triggered time adjustment will not affect the CLKOUT of the 32.768 kHz (see also XTAL CLKOUT FREQUENCY SELECTION).

Scheme of the ESYN bit function:

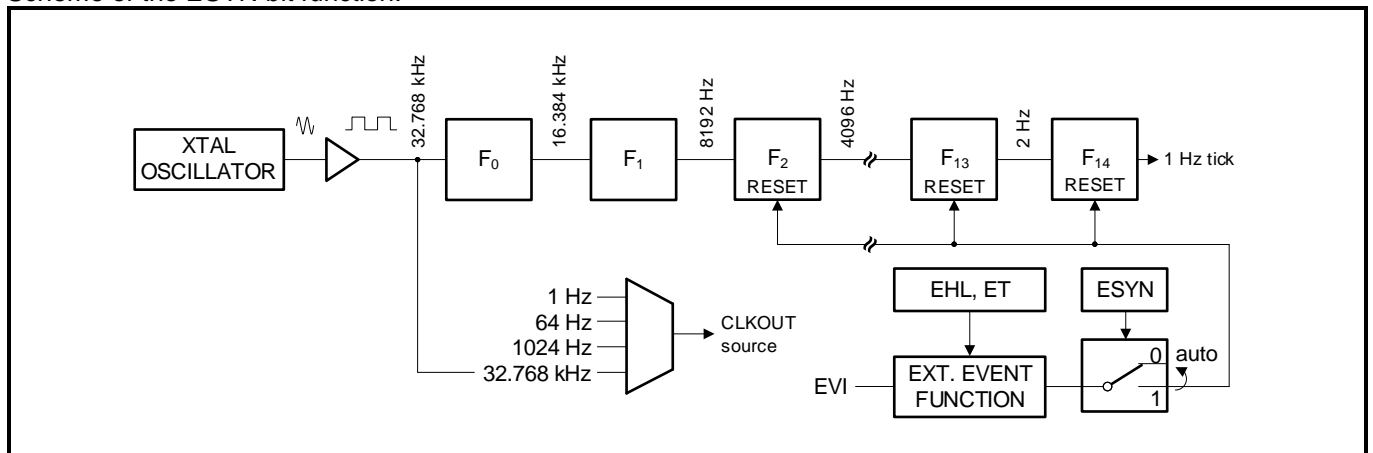

Setting the clock and calendar values synchronous to an External Event detection on EVI pin:


1. Initialize the External Event Function according to USE OF THE EXTERNAL EVENT INTERRUPT with bit ESYN set to 1.
2. When interrupt pin \overline{INT} is triggered by the External Event Function, write the desired clock and calendar values to the registers (year, month, date, weekday, hours, minutes and seconds). The 100th Seconds register is cleared to 00 automatically.
Note that when you write to the Seconds register, the time is synchronized again.
3. After the event detection, the ESYN bit is reset to 0 automatically.

See also EXTERNAL EVENT INTERRUPT FUNCTION.

Hint: The ESYN bit function does first the Time Stamp EVI, then clears 100th Seconds register.

Hint: If ESYN is 1, the synchronization function can be cancelled at any time by resetting the ESYN bit to 0.

Timing of the ESYN bit function:

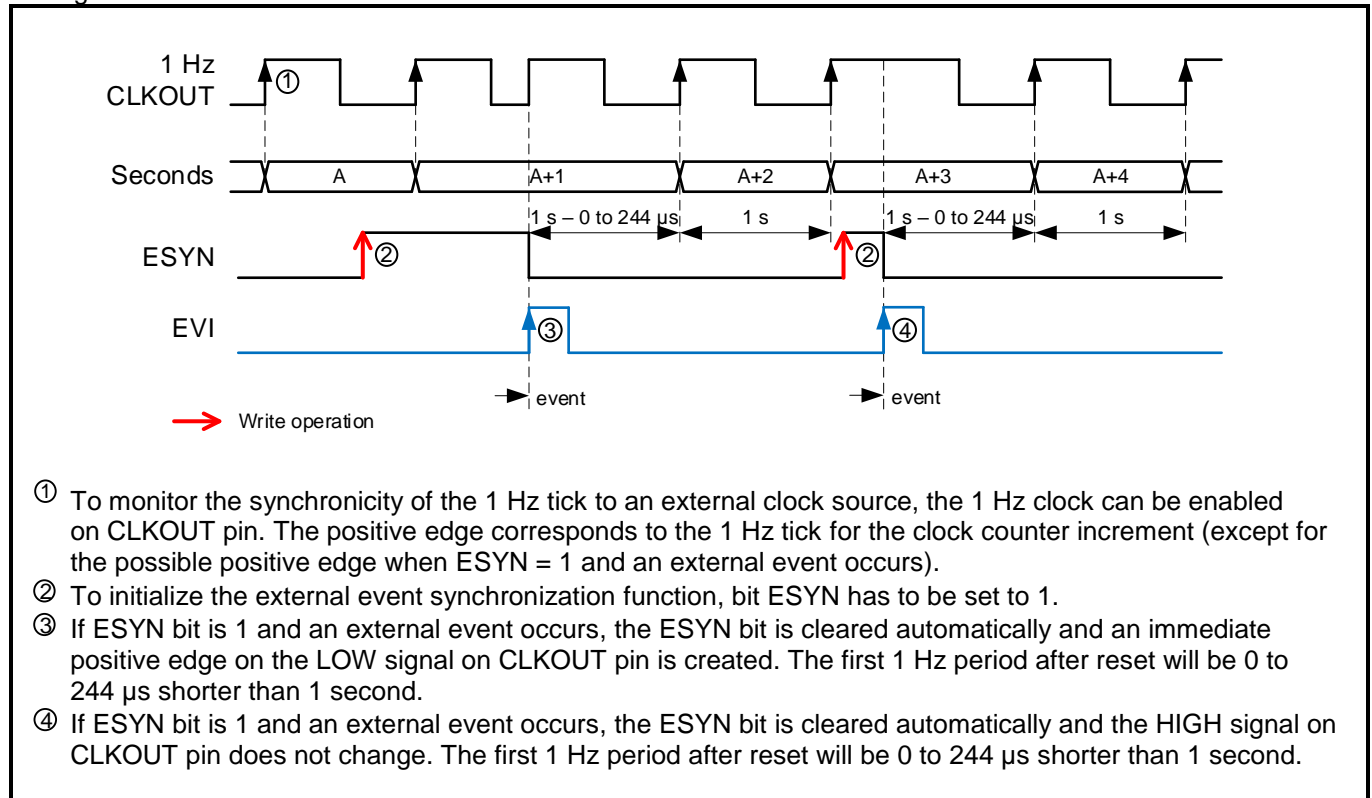

4.22. USER PROGRAMMABLE PASSWORD

After a Power up and the first refreshment of $t_{PREFR} = \sim 66$ ms, the Password PW registers (RAM 39h to 3Ch) are reset to 00h and the value in EEPWE (EEPROM CAh) and the values in the EEPROM Password EEPW registers (EEPROM C6h to C9h) are copied from EEPROM to the corresponding RAM mirror.

The first four Password registers (PW), in case of the use of the function (enabled by writing 255 into the EEPROM Password Enable register EEPWE), are necessary to be able to write in all writable registers that have the convention WP (time, control, user RAM, configuration EEPROM and user EEPROM registers). The 32-Bit Password PW is compared with the 32 bits stored in the RAM mirror of the EEPW registers (see PASSWORD REGISTERS, EEPROM PASSWORD REGISTERS and EEPROM PASSWORD ENABLE REGISTER).

Caution: The number of possible passwords is $2^{32} \approx 4.3 \times 10^9 = 4.3$ billion.

4.22.1. ENABLE/DISABLE WRITE PROTECTION

If the write protection function is enabled by writing 255 in register EEPWE (EEPROM CAh), it remains possible to read all the registers except the EEPROM registers. The EEPROM registers cannot be read because it cannot be written to the EE Address and EE Command registers. If the function is not enabled, read and write are possible for all corresponding registers.

If the write protection function is enabled, it is necessary to first write the correct 32-Bit Password PW (PW = EEPW) (Unlock), before any attempt to write in the RAM registers and to read and write in the EEPROM registers.

Once the user is finished with the write access and subsequently the write protection is still enabled or enabled again (by writing 255 in EEPROM register EEPWE), it is necessary to write an incorrect password (PW \neq EEPW) into the Password PW registers in order to write-protect (Lock) the registers. See program sequences below and FLOWCHART.

Enable write protection:

1. Initial state (POR): WP-Registers are Not write-protected (EEPWE \neq 255)
Reference password is stored in the RAM mirror of EEPW (**addrs C6h to C9h**)
2. Disable automatic refresh by setting EERD = 1
3. Enable password function by entering EEPWE = 255 (**RAM mirror address CAh**)
4. Enter the correct password PW (PW = EEPW) to unlock write protection (**RAM addresses 39h to 3Ch**)
5. Update EEPROM (all Configuration RAM \rightarrow EEPROM) by writing 11h to EECMD
6. Enable automatic refresh by setting EERD = 0
7. Enter an incorrect password PW (PW \neq EEPW) to lock the device (**RAM addresses 39h to 3Ch**)
8. Final state: WP-Registers are Write-protected by password (EEPWE = 255)

Disable write protection:

1. Initial state (POR): WP-Registers are Write-protected by password (EEPWE = 255)
Reference password is stored in the RAM mirror of EEPW (**addrs C6h to C9h**)
2. Enter the correct password PW (PW = EEPW) to unlock write protection (**RAM addresses 39h to 3Ch**)
3. Disable automatic refresh by setting EERD = 1
4. Disable password function by entering EEPWE \neq 255 (**RAM mirror address CAh**)
5. Update EEPROM (all Configuration RAM \rightarrow EEPROM) by writing 11h to EECMD
6. Enable automatic refresh by setting EERD = 0
7. Final state: WP-Registers are Not write-protected (EEPWE \neq 255)

Hint: The EEPROM values of the reference password in the EEPROM Password EEPW registers can be READ with the Read one EEPROM byte command (writing 22h to EECMD) when in unlocked state (registers not write-protected). This option is useful if it is not certain which password is written in the EEPW before the write protection function is enabled. The RAM mirror from the EEPW registers can never be read.

4.22.2. CHANGING PASSWORD

To code a new password, the user has to first enter the current (correct) Password PW (PW = EEPW) into the registers 39h to 3Ch, if the WP-Registers are write protected, and then write a value not equal to all 1 (value \neq 255) in the EEPWE register (EEPROM CAh) to unlock write protection, and then write the new reference password EEPW into the EEPROM registers C6h to C9h and writing all 1 (value = 255) in the EEPWE register to enable password function. See program sequences below and FLOWCHART.

Change password if password function is enabled (EEPWE = 255):

1. Initial state (POR): WP-Registers are Write-protected by old reference Password EEPW
Reference password is stored in the RAM mirror of EEPW (**addrs C6h to C9h**)
2. Enter old, correct password PW (PW = EEPW) to unlock write protection (**RAM addresses 39h to 3Ch**)
3. Disable automatic refresh by setting EERD = 1
4. Disable password function by entering EEPWE \neq 255 (**RAM mirror address CAh**)
5. Define a new reference password in the EEPW registers (**RAM mirror addresses C6h to C9h**)
6. Enable the password function by entering EEPWE = 255 (**RAM mirror address CAh**)
7. Enter new, correct password PW (PW = EEPW) to unlock write protection (**RAM addresses 39h to 3Ch**)
8. Update EEPROM (all Configuration RAM \rightarrow EEPROM) by writing 11h to EECMD
9. Enable automatic refresh by setting EERD = 0
10. Enter an incorrect password PW (PW \neq EEPW) to lock the device (**RAM addresses 39h to 3Ch**)
11. Final state: WP-Registers are Write-protected by new reference EEPROM Password EEPW

Change password if password function is disabled (EEPWE \neq 255):


1. Initial state (POR): Old reference password is stored in the EEPROM Password EEPW
Reference password is stored in the RAM mirror of the EEPROM Password EEPW (**addrs C6h to C9h**)
2. Disable automatic refresh by setting EERD = 1
3. Define a new reference password in the EEPW registers (**RAM mirror addresses C6h to C9h**)
4. Update EEPROM (all Configuration RAM \rightarrow EEPROM) by writing 11h to EECMD
5. Enable automatic refresh by setting EERD = 0
6. Final state: New reference password is stored in the EEPROM Password EEPW

Note that the EEPROM password EEPW = 00000000h is not a real password, because after POR the password PW is also 00000000h (PW = EEPW) and although the password function is enabled after POR refresh (EEPWE = 255) the PW-Registers are unlocked.

4.22.3. FLOWCHART

The following flowchart describes the programming of the enabling and disabling of the register write protection by user password and the changing of the user password and the other Configuration EEPROM registers (C0h to C5h) if write protection is enabled or disabled. In this example the Update EEPROM command (writing 11h to EECMD) is applied to write (store) data from all Configuration RAM mirror bytes (addresses C0h to CAh) into the corresponding Configuration EEPROM bytes. See also USE OF THE CONFIGURATION REGISTERS.

User programmable password flowchart:

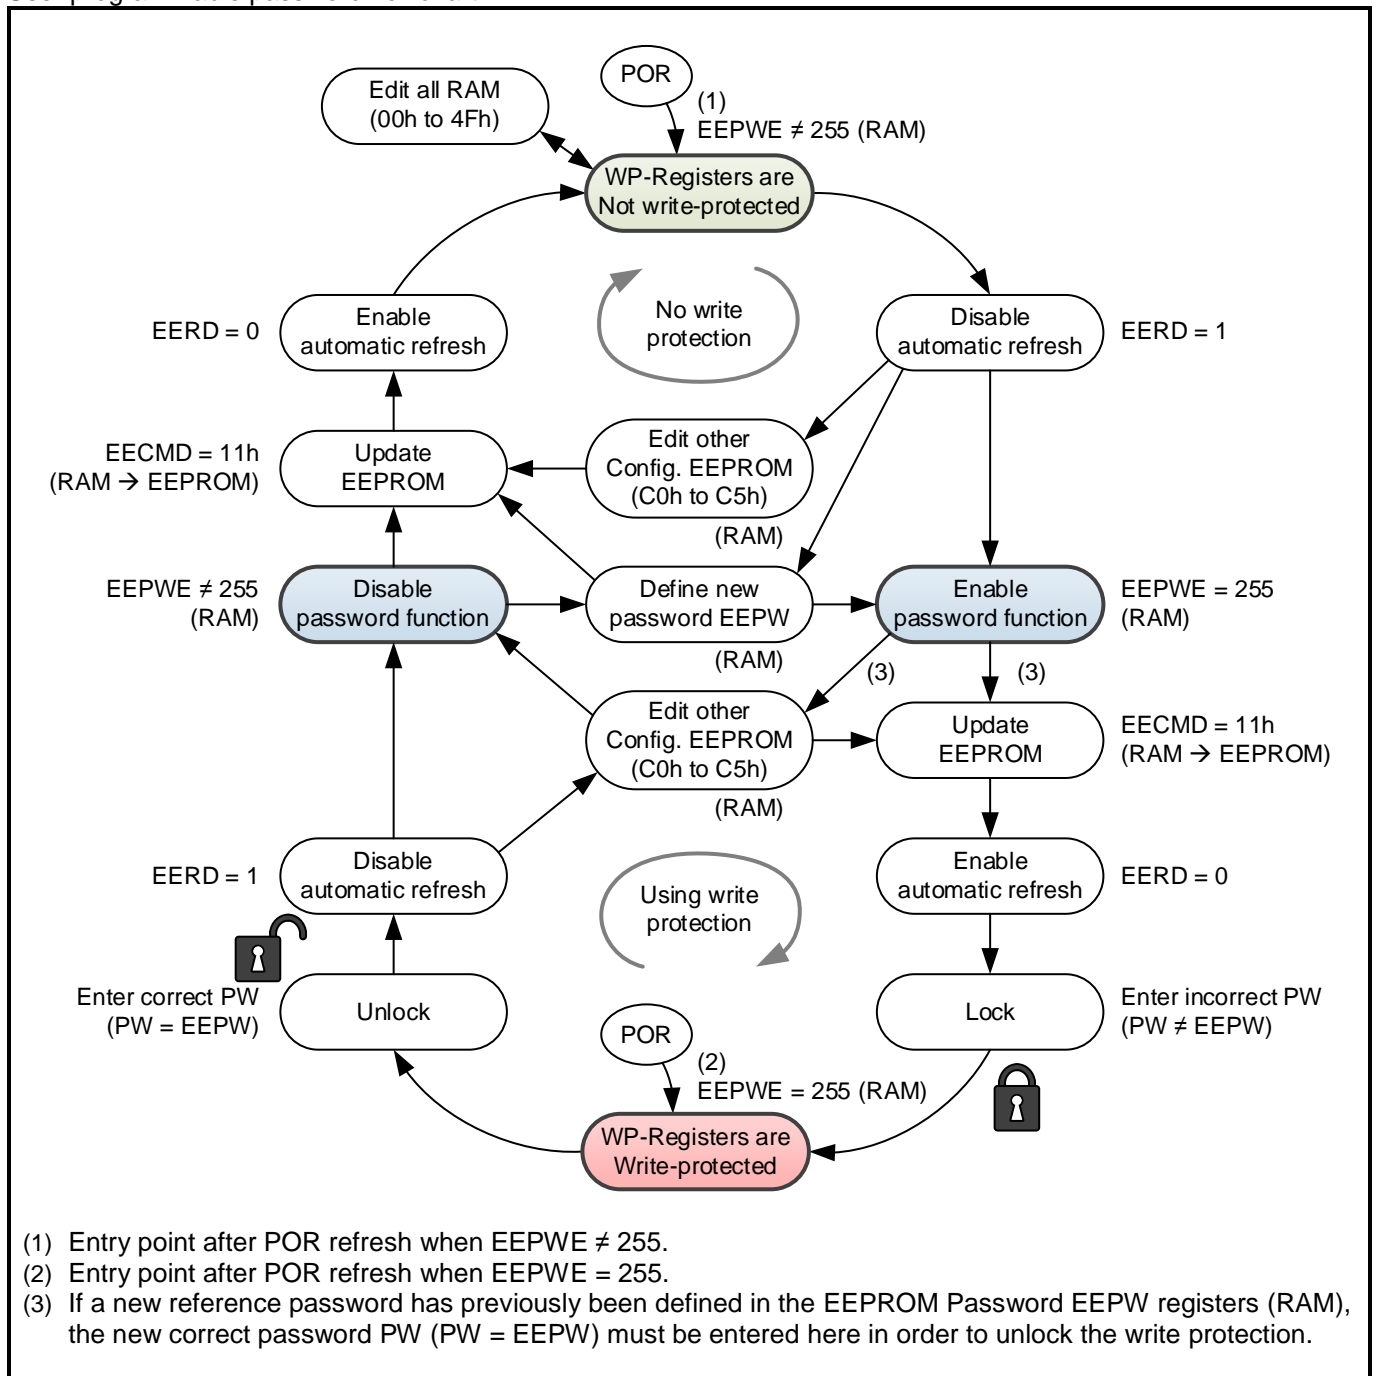

5. TEMPERATURE COMPENSATION

5.1. XTAL MODE FREQUENCIES

Xtal 32.768 kHz

The Xtal 32.768 kHz clock is not temperature compensated. Due to its negative temperature coefficient with a parabolic frequency deviation, a change of up to -150 ppm across the standard operating temperature range from -40°C to +85°C can result (for the extended operating range of -40°C to +105°C a frequency change of -225 ppm can result). The 32.768 kHz oscillator frequency on all devices is tested not to exceed a frequency deviation of ± 50 ppm (parts per million) at 25°C.

Frequencies from 4096 Hz to 64 Hz

These frequencies are digitally temperature compensated with a Time Accuracy of ± 2.5 ppm over the standard temperature range from -40°C to +85°C and of ± 20 ppm for the extended temperature range from +85°C to +105°C. The clock at the 16.384 kHz level of the divider chain is modified by adding or subtracting 32.768 kHz level pulses. The pulses are added or subtracted according to the expected frequency deviation computed by the temperature compensation algorithm. The digital compensation method (adding and subtracting clock pulses) is affecting the cycle-to-cycle jitter of the digitally compensated frequencies shown below.

- 4096 Hz (Periodic Countdown Timer Interrupt)
- 1024 Hz (CLKOUT)
- 100 Hz (External Event Interrupt)
- 64 Hz (CLKOUT and Periodic Countdown Timer Interrupt)

Aging compensation can be done with the OFFSET value (see AGING CORRECTION).

1 Hz and Clock / Calendar

The 1 Hz clock is temperature compensated and using both, digital coarse compensation and digital fine adjustment. The Time Accuracy and the Frequency Accuracy is ± 2.5 ppm for every 1 Hz period over the standard temperature range from -40°C to +85°C and ± 20 ppm for the extended temperature range from +85°C to +105°C. The temperature compensation algorithm adjusts every 1 Hz period with a resolution of about 0.1 ppm. This precise and accurate 1 Hz clock is used to increment all subsequent clock and calendar registers (see TIME ACCURACY VS. TEMPERATURE CHARACTERISTICS).

Aging compensation can be done with the OFFSET value (see AGING CORRECTION).

5.2. COMPENSATION VALUES

Each device is factory calibrated over the full temperature range, and the individual compensation values are stored in the EEPROM of the Digital Temperature Compensation Unit (DTCU). This EEPROM is not accessible for the user.

5.3. AGING CORRECTION

An aging adjustment or accuracy tuning can be done with the OFFSET value. The correction is purely digital and has only the effect of shifting the time vs. temperature curve vertically up or down. It has no effect on the time vs. temperature characteristics of the final frequency. The OFFSET value contains a two's complement number with a range of -32 to +31 adjustment steps. The minimal correction step (one LSB) is $\pm 1 / (32768 \times 128) = \pm 0.2384$ ppm. The maximum correction range is roughly ± 7.4 ppm. Note that the signed offset value OFFSET corresponds to the actual offset value of the measured frequency. The user has access to this field (see EEPROM OFFSET REGISTER).

5.3.1. OFFSET VALUE DETERMINATION

The OFFSET value is determined by the following process:

1. Set the OFFSET field to 0 to ensure correction is not occurring.
2. Select the 1 Hz frequency on the CLKOUT pin.
3. Measure the frequency F_{meas} at the output pin in Hz. See MEASURING TIME ACCURACY AT CLKOUT PIN.
4. Compute the offset value required in ppm: $P_{offset} = (F_{meas} - 1) \times 1'000'000$
5. Compute the offset value in steps: $Offset = P_{offset} / (1 / (32768 \times 128)) = P_{offset} / (0.2384)$
6. If $Offset > 31$, the frequency is too high to be corrected.
7. Else if $0 \leq Offset \leq 31$, set $OFFSET = Offset$
8. Else if $-32 \leq Offset \leq -1$, set $OFFSET = Offset + 64$
9. Else the frequency is too low to be corrected.

Examples:


- If 1.0000012 Hz is measured when the 1 Hz clock is selected, the offset is +0.0000012 Hz, which is $+0.0000012 \text{ Hz} / 10^{-6} \text{ Hz} = +1.2$ ppm. The positive offset value is then calculated as follows: $+1.2 \text{ ppm} / 0.2384 \text{ ppm} = +5.03$, the rounded integral part is +5. In binary, $OFFSET = 000101$.
- If 0.9999949 Hz is measured when the 1 Hz clock is selected, the offset is -0.0000051 Hz, which is $-0.0000051 \text{ Hz} / 10^{-6} \text{ Hz} = -5.1$ ppm. The negative offset value is then calculated as follows: $-5.1 \text{ ppm} / 0.2384 \text{ ppm} = -21.39$, the rounded integral part is -21. The unsigned value is then: $-21 + 64 = +43$. In binary, $OFFSET = 101011$.

5.3.2.MEASURING TIME ACCURACY AT CLKOUT PIN

The simplest method to verify the time accuracy of the Digital Temperature Compensation Unit (DTCU) is to measure the compensated 1 Hz frequency at the CLKOUT pin. The 1 Hz clock frequency contains digitally temperature compensated clocks with digital fine adjustment and represents the overall time accuracy of the device.

1. Select the 1 Hz frequency at CLKOUT pin:
 - a. Set OS bit to 0 to select XTAL mode (EEPROM C3h).
 - b. Set FD field to 11 to select 1 Hz (EEPROM C3h).
 - c. Set NCLKE bit to 0 to directly enable square wave output on CLKOUT pin.
2. Measuring equipment and setup:
 - a. Use a high-precision universal counter to observe the 1 Hz time accuracy on CLKOUT pin.
 - b. Trigger on the rising edge of the hybrid signal (gate time \geq 1 second). Each 1 Hz clock measured at the rising edge fully representing the accuracy of the DTCU.

1 Hz time accuracy at CLKOUT pin (hybrid signal):

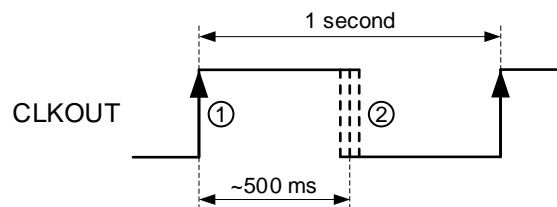


- ① CLKOUT Output is active HIGH.
When measuring the time accuracy it is mandatory to trigger on the rising edge of the CLKOUT signal. The temperature compensation algorithm adjusts every 1 Hz period with a resolution of about 0.1 ppm.
- ② The falling edge of the CLKOUT signal is generated when the RV-3032-C7 clears the signal after ~500 ms. The negative edge is created by the 32.768 kHz Xtal and must not be used to test the time accuracy.

Note that the Periodic Time Update Interrupt function (1 Second or 1 Minute Update) as well as the other interrupt functions cannot be used for short-term time accuracy measurement as rising and falling edges of the \overline{INT} signal are generated by the 32.768 kHz Xtal signal.

5.4. CLOCKING SCHEME

Clocking Scheme with CLKOUT and Interrupts:

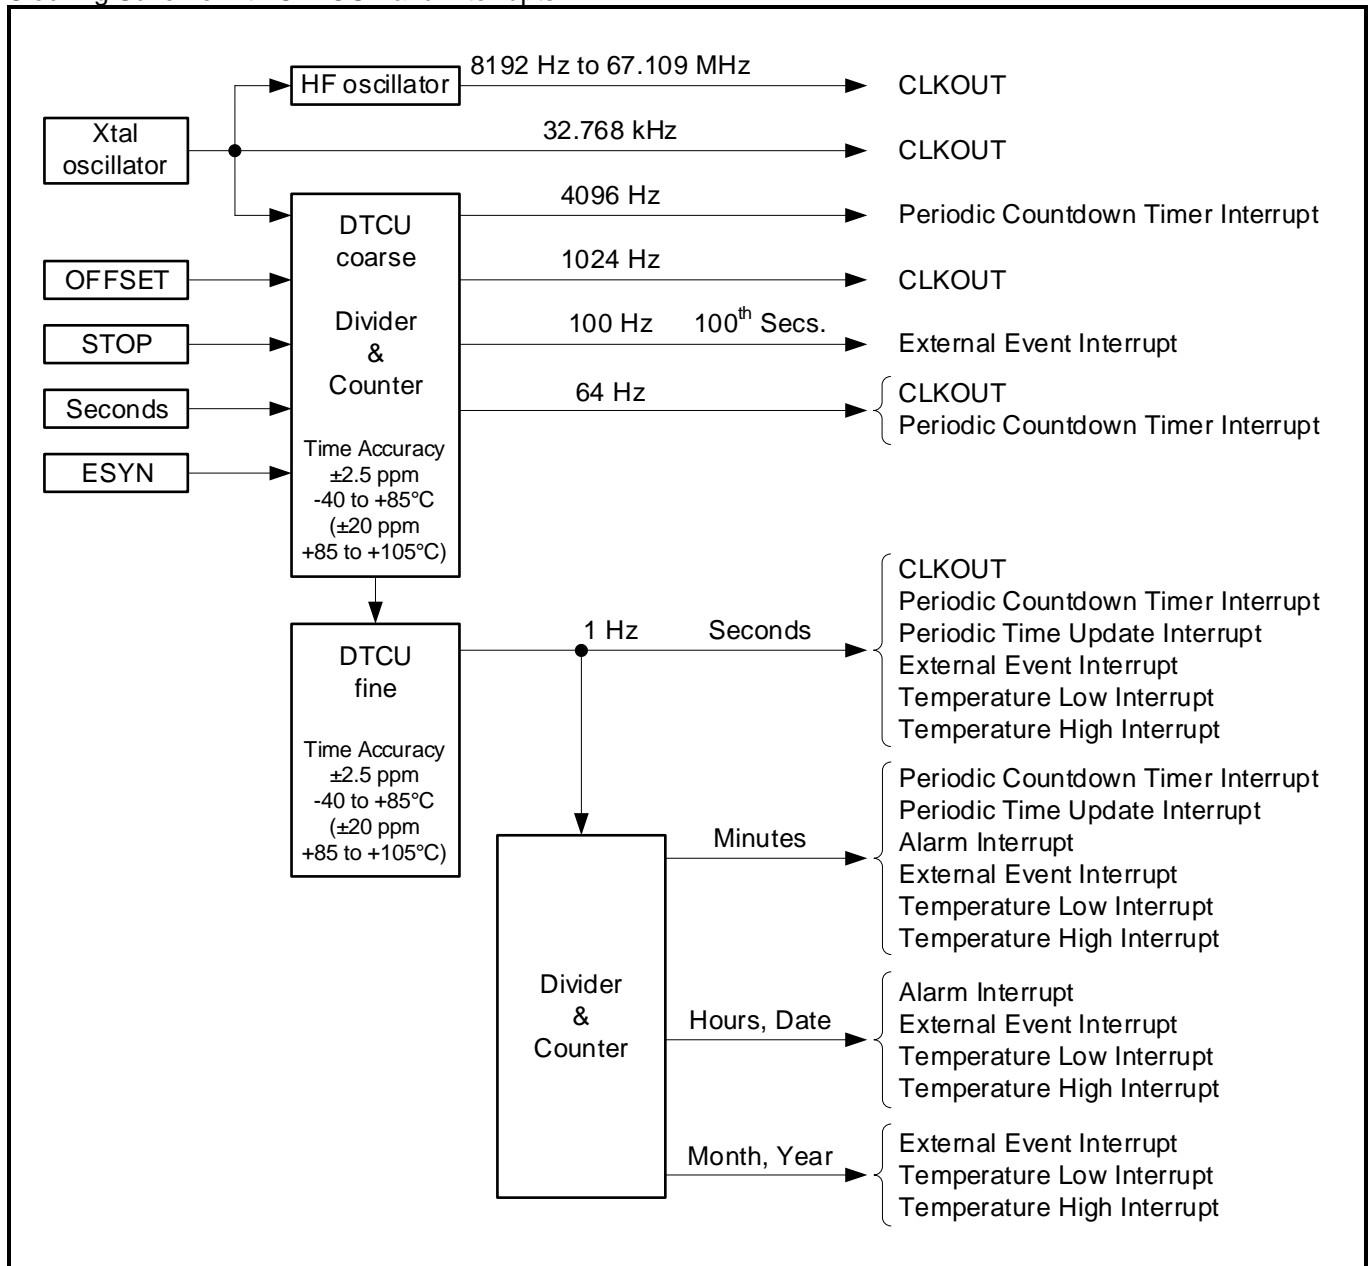


6. I²C INTERFACE

The I²C interface is for bidirectional, two-line communication between different ICs or modules. The RV-3032-C7 is accessed at addresses A2h/A3h, and supports Fast Mode (up to 400 kHz). The I²C interface consists of two lines: one bi-directional data line (SDA) and one clock line (SCL). Both lines are connected to a positive supply via pull-up resistors. Data transfer is initiated only when the interface is not busy.

6.1. BIT TRANSFER

One data bit is transferred during each clock pulse. The data on the SDA line remains stable during the HIGH period of the clock pulse, as changes in the data line at this time are interpreted as a control signals. Data changes should be executed during the LOW period of the clock pulse (see Figure below).


Bit transfer:

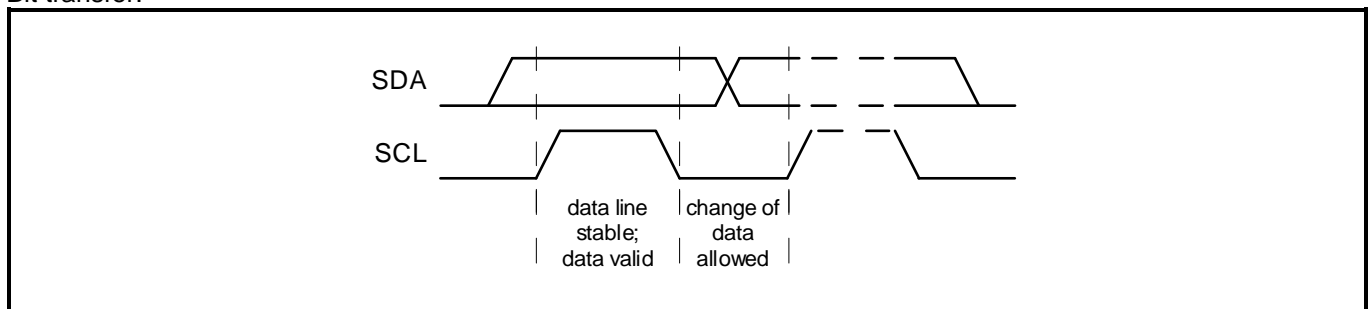

6.2. START AND STOP CONDITIONS

Both data and clock lines remain HIGH when the bus is not busy. A HIGH-to-LOW transition of the data line, while the clock is HIGH, is defined as the START condition (S). A LOW-to-HIGH transition of the data line, while the clock is HIGH, is defined as the STOP condition (P) (see Figure below).

Definition of START and STOP conditions:

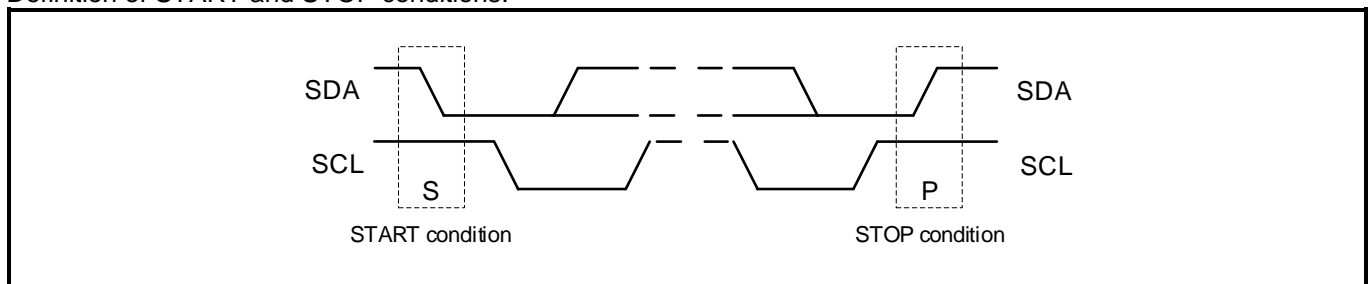

A START condition which occurs after a previous START but before a STOP is called a Repeated START condition, and functions exactly like a normal STOP followed by a normal START.

Caution:

When communicating with the RV-3032-C7 module, the series of operations from transmitting the START condition to transmitting the STOP condition should occur within **950 ms**.

If this series of operations requires **950 ms or longer**, the I²C-bus interface will be automatically cleared and set to standby mode by the bus timeout function of the RV-3032-C7. Note with caution that both write and read operations are invalid for communications that occur during or after this auto clearing operation. When writing: no acknowledge will occur. When reading: FFh will be read.

Restarting of communications begins with transfer of the START condition again.

The I²C auto increment Address Pointer is neither reset by the I²C STOP condition nor by the internal stop forced after timeout.

6.3. DATA VALID

After a START condition, SDA is stable for the duration of the high period of SCL. The data on SDA may be changed during the low period of SCL. There is one clock pulse per bit of data. Each data transfer is initiated with a START condition and terminated with a STOP condition. The number of data bytes transferred between the START and STOP conditions is not limited (however, the transfer time must be no longer than 950 ms). The information is transmitted byte-wise and each receiver acknowledges with a ninth bit.


6.4. SYSTEM CONFIGURATION

Since multiple devices can be connected with the I²C-bus, all I²C-bus devices have a fixed and unique device address built-in to allow individual addressing of each device.

The device that controls the I²C-bus is the Master; the devices which are controlled by the Master are the Slaves. A device generating a message is a Transmitter; a device receiving a message is the Receiver. The RV-3032-C7 acts as a Slave-Receiver or Slave-Transmitter.

Before any data is transmitted on the I²C-bus, the device which should respond is addressed first. The addressing is always carried out with the first byte transmitted after the START procedure. The clock signal SCL is only an input signal, but the data signal SDA is a bidirectional line.

System configuration:

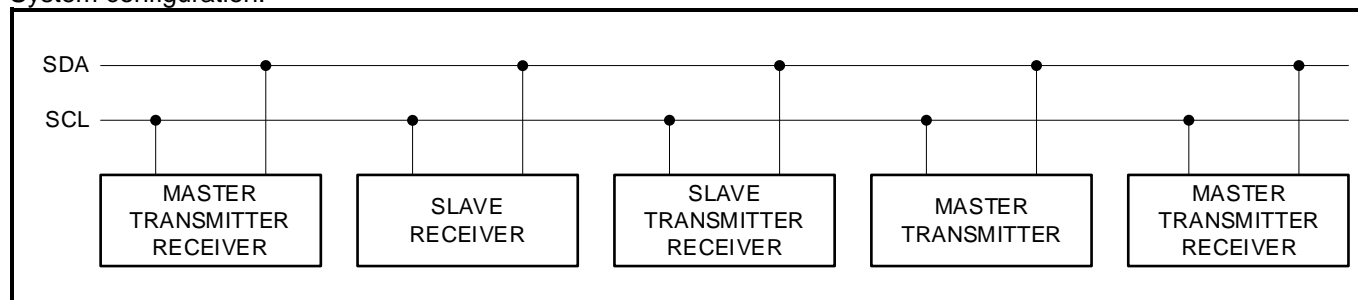


6.5. ACKNOWLEDGE

The number of data bytes transferred between the START and STOP conditions from transmitter to receiver is unlimited (however, the transfer time must be no longer than 950 ms). Each byte of eight bits is followed by an acknowledge cycle.

- A slave receiver, which is addressed, must generate an acknowledge cycle after the reception of each byte.
- Also a master receiver must generate an acknowledge cycle after the reception of each byte that has been clocked out of the slave transmitter.
- The device that acknowledges must pull-down the SDA line during the acknowledge clock pulse (set-up and hold times must be taken into consideration).
- A master receiver must signal an end of data to the transmitter by generating a not-acknowledge cycle on the last byte that has been clocked out of the slave. In this event the transmitter must leave the data line HIGH to enable the master to generate a STOP condition.

Data transfer and acknowledge on the I²C-bus:

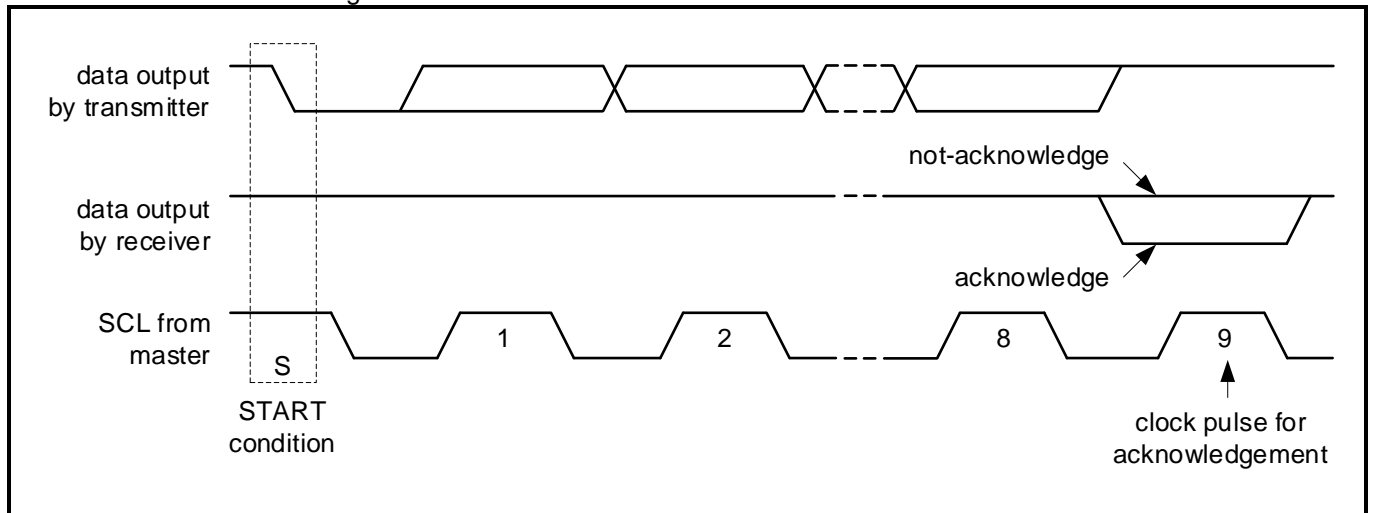

6.6. SLAVE ADDRESS

On the I²C-bus the 7-bit slave address 1010001b (51h) is reserved for the RV-3032-C7. The entire I²C-bus slave address byte is shown in the following table.

Slave address							R/ \bar{W}	Transfer data
Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
1	0	1	0	0	0	1	1 (R)	A3h (read)
							0 (\bar{W})	A2h (write)


After a START condition, the I²C slave address has to be sent to the RV-3032-C7 device. The R/ \bar{W} bit defines the direction of the following single or multiple byte data transfer. The 7-bit address is transmitted MSB first. If this address is 1010001b (51h), the RV-3032-C7 is selected, the eighth bit indicates a read (R/ \bar{W} = 1) or a write (R/ \bar{W} = 0) operation (results in A3h or A2h) and the RV-3032-C7 supplies the ACK. The RV-3032-C7 ignores all other address values and does not respond with an ACK.

In the write operation, a data transfer is terminated by sending either the STOP condition or the START condition of the next data transfer.

6.7. WRITE OPERATION

Master transmits to Slave-Receiver at specified address. The Register Address is an 8-bit value that defines which register is to be accessed next. After writing one byte, the Register Address is automatically incremented by 1.


Master writes to slave RV-3032-C7 at specific address:

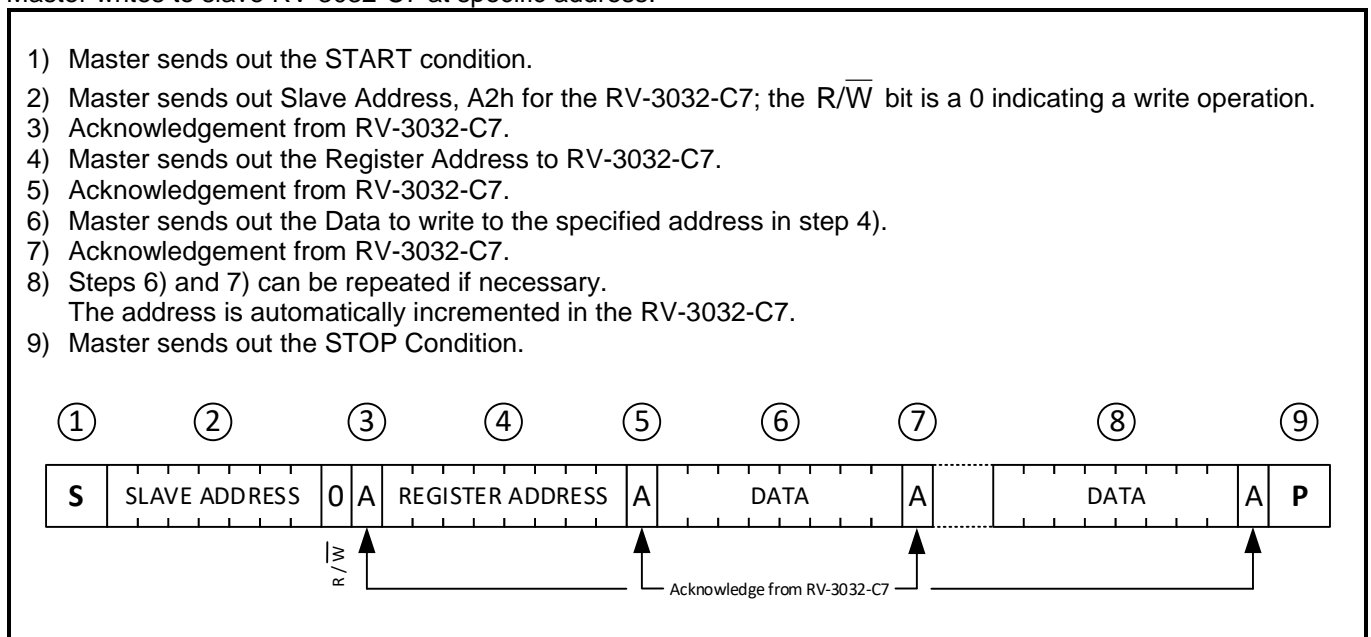

6.8. READ OPERATION AT SPECIFIC ADDRESS

Master reads data from slave RV-3032-C7 at specific address:


- 1) Master sends out the START condition.
- 2) Master sends out Slave Address, A2h for the RV-3032-C7; the $\overline{R/\overline{W}}$ bit is a 0 indicating a write operation.
- 3) Acknowledgement from RV-3032-C7.
- 4) Master sends out the Register Address to RV-3032-C7.
- 5) Acknowledgement from RV-3032-C7.
- 6) Master sends out the Repeated START condition (or STOP condition followed by START condition)
- 7) Master sends out Slave Address, A3h for the RV-3032-C7; the $\overline{R/\overline{W}}$ bit is a 1 indicating a read operation.
- 8) Acknowledgement from RV-3032-C7.
At this point, the Master becomes a Receiver and the Slave becomes the Transmitter.
- 9) The Slave sends out the Data from the Register Address specified in step 4).
- 10) Acknowledgement from Master.
- 11) Steps 9) and 10) can be repeated if necessary.
The address is automatically incremented in the RV-3032-C7.
- 12) The Master, addressed as Receiver, can stop data transmission by generating a not-acknowledge on the last byte that has been sent from the Slave-Transmitter. In this event, the Slave-Transmitter must leave the data line HIGH to enable the Master to generate a STOP condition.
- 13) Master sends out the STOP condition.

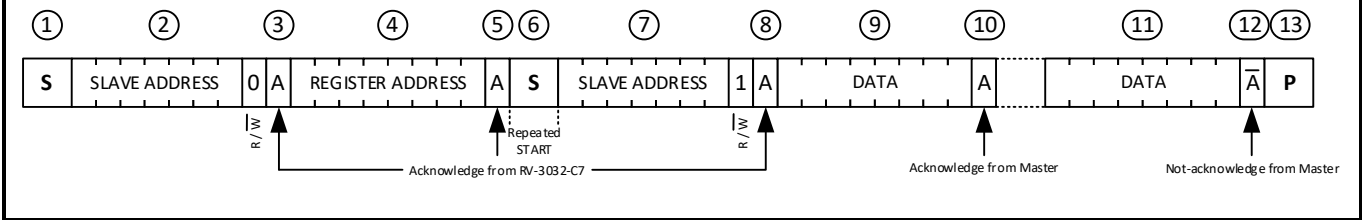

6.9. READ OPERATION

Master reads data from slave RV-3032-C7 immediately after first byte:

- 1) Master sends out the START condition.
- 2) Master sends out Slave Address, A3h for the RV-3032-C7; the $\overline{R/\overline{W}}$ bit is a 1 indicating a read operation.
- 3) Acknowledgement from RV-3032-C7.
At this point, the Master becomes a Receiver and the Slave becomes the Transmitter.
- 4) The RV-3032-C7 sends out the Data from the last accessed Register Address incremented by 1.
- 5) Acknowledgement from Master.
- 6) Steps 4) and 5) can be repeated if necessary.
The address is automatically incremented in the RV-3032-C7.
- 7) The Master, addressed as Receiver, can stop data transmission by generating a not-acknowledge on the last byte that has been sent from the Slave-Transmitter. In this event, the Slave-Transmitter must leave the data line HIGH to enable the Master to generate a STOP condition.
- 8) Master sends out the STOP condition.

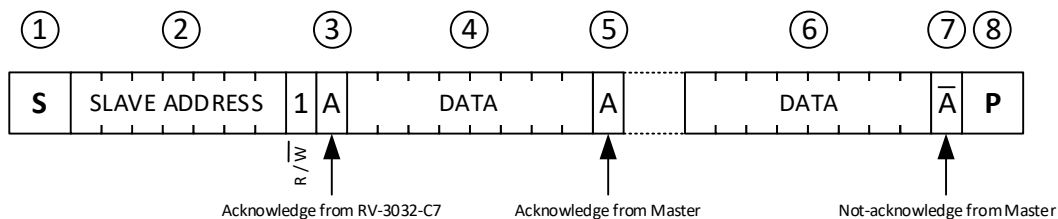

6.10. I²C-BUS IN SWITCHOVER CONDITION

To save power when the RV-3032-C7 is in VBACKUP Power state the bus I²C-bus interface is automatically disabled (high impedance) and reset. Therefore the communication via I²C interface should be terminated before the supply is switched from V_{DD} to V_{BACKUP}. If the bus communication could not be completed properly, the I²C read/write data integrity is no longer guaranteed.

If the I²C communication has ended in an uncontrolled manner, the I²C-bus interface has to be re-initialized by sending a STOP followed by a START after the device switched back from VBACKUP Power state to VDD Power state.

Note, that a debounce logic provides a debounce time t_{DEB} which will filter V_{DD} oscillation when switchover function will switch back from V_{BACKUP} to V_{DD}. I²C access is again possible in VDD Power state (and if V_{DD} ≥ 1.4 V) after the debounce time t_{DEB} .

- $t_{DEB} \text{ MAX} = 1 \text{ ms}$, when internal voltage was always above V_{LOW} (typical 1.2 V). VLF = 0.
- $t_{DEB} \text{ MAX} = 1000 \text{ ms}$, when internal voltage was between V_{LOW} (typical 1.2 V) and V_{POR} (maximum 1.05 V). VLF = 1. See also BACKUP AND RECOVERY AC ELECTRICAL CHARACTERISTICS.

7. ELECTRICAL SPECIFICATIONS

7.1. ABSOLUTE MAXIMUM RATINGS

The following Table lists the absolute maximum ratings.

Absolute Maximum Ratings according to IEC 60134:

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
V _{DD}	Power Supply Voltage		-0.3		6.0	V
V _I	Input voltage	Input Pin	-0.3		V _{DD} +0.3	V
V _O	Output voltage	Output Pin	-0.3		V _{DD} +0.3	V
I _I	Input current		-10		10	mA
I _O	Output current		-10		10	mA
V _{ESD}	ESD Voltage	HBM ⁽¹⁾			±2000	V
		CDM ⁽²⁾			±500	V
I _{LU}	Latch-up Current	Jedec ⁽³⁾			±100	mA
T _{OPR}	Operating Temperature		-40		+85 ⁽⁴⁾	°C
T _{STO}	Storage Temperature		-55		+125	°C
T _{PEAK}	Maximum reflow condition	JEDEC J-STD-020C			+265	°C

⁽¹⁾ HBM: Human Body Model, according to JEDEC JS-001.

⁽²⁾ CDM: Charged-Device Model, according to JEDEC JS-002.

⁽³⁾ Latch-up testing, according to JESD78, Class I (room temperature), level A (100 mA).

⁽⁴⁾ Supports extended operating temperature range from +85°C to +105°C with limitations.

7.2. OPERATING PARAMETERS

For this Table, $T_A = -40$ to $+85^\circ\text{C}$ unless otherwise indicated. $V_{DD} = 1.4$ to 5.5 V, TYP values at 25°C and 3.0 V.

Operating Parameters:

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
Supplies						
V_{DD}	Power Supply Voltage $T_{OPR} = -40$ to $+105^\circ\text{C}$	Timekeeping mode ⁽¹⁾	1.3		5.5	V
		Minimum timekeeping voltage ⁽²⁾	1.0		1.3	
		Oscillator start-up voltage V_{START}	1.3			
		I ² C-bus (100 kHz)	1.4		5.5	
		I ² C-bus (400 kHz)	2.0		5.5	
V_{BACKUP}	Backup Supply Voltage $T_{OPR} = -40$ to $+105^\circ\text{C}$	Timekeeping mode ⁽¹⁾	1.3		5.5	V
		Minimum timekeeping voltage ⁽²⁾	1.0		1.3	
V_{LOW}	Voltage low detection (VLF flag) ⁽³⁾	Internal voltage (V_{DD} or V_{BACKUP}), (1 Hz sampling)	1.1	1.2	1.3	V
I_{DD}	V_{DD} supply current timekeeping I ² C-bus inactive, CLKOUT disabled, average current ⁽⁴⁾	$V_{DD} = 1.3$ V, $T_A = 25^\circ\text{C}$		160	210	nA
		$V_{DD} = 3.0$ V, $T_A = 25^\circ\text{C}$		160	210	
		$V_{DD} = 5.0$ V, $T_A = 25^\circ\text{C}$		165	220	
		$V_{DD} = 1.3$ V, -40 to $+85^\circ\text{C}$			700	
		$V_{DD} = 3.0$ V, -40 to $+85^\circ\text{C}$			750	
		$V_{DD} = 5.0$ V, -40 to $+85^\circ\text{C}$			900	
$I_{DD:EXT}$	V_{DD} supply current timekeeping I ² C-bus inactive, CLKOUT disabled, average current ⁽⁴⁾ for extended temperature range	$V_{DD} = 1.3$ V, $+85$ to $+105^\circ\text{C}$			1300	nA
		$V_{DD} = 3.0$ V, $+85$ to $+105^\circ\text{C}$			1400	
		$V_{DD} = 5.0$ V, $+85$ to $+105^\circ\text{C}$			1800	
$I_{DD:I2C}$	V_{DD} supply current during I ² C burst read/write, CLKOUT disabled ⁽⁵⁾	$V_{DD} = 1.4$ V, SCL = 100 kHz		2	15	μA
		$V_{DD} = 3.0$ V, SCL = 400 kHz		5	40	
		$V_{DD} = 5.0$ V, SCL = 400 kHz		7	60	
I_{TSP}	Supply current temperature sensing peak (I_{DD} or I_{BACKUP})	Typical duration: $t_{TSP} = 1.3$ ms		14	60	μA
$I_{DD:DSM}$	V_{DD} supply current in Direct Switching Mode, I ² C-bus inactive, CLKOUT disabled	$V_{DD} = 3.0$ V, $T_A = 25^\circ\text{C}$, $V_{BACKUP} < V_{DD}$		165	260	nA
$I_{DD:L5M}$	V_{DD} supply current in Level Switching Mode, I ² C-bus inactive, CLKOUT disabled	$V_{DD} = 3.0$ V, $T_A = 25^\circ\text{C}$		190	300	
$I_{BACKUP:DSM}$	V_{BACKUP} supply current in Direct Switching Mode	$V_{BACKUP} = 3.0$ V, $T_A = 25^\circ\text{C}$, $V_{DD} < V_{BACKUP}$		165	260	
$I_{BACKUP:L5M}$	V_{BACKUP} supply current in Level Switching Mode	$V_{BACKUP} = 3.0$ V, $T_A = 25^\circ\text{C}$, $V_{DD} < V_{TH:L5M}$ (2.0 V)		170	270	
$\Delta I_{DD:CK32}$	Additional V_{DD} supply current ⁽⁶⁾	$V_{DD} = 3.0$ V, $F_{CLKOUT} = 32.768$ kHz, $C_L = 10$ pF		1		μA
$\Delta I_{DD:CK1024}$		$V_{DD} = 3.0$ V, $F_{CLKOUT} = 1024$ Hz, $C_L = 10$ pF		30		nA
$\Delta I_{DD:CK64}$		$V_{DD} = 3.0$ V, $F_{CLKOUT} = 64$ Hz, $C_L = 10$ pF		2		
$\Delta I_{DD:CK1}$		$V_{DD} = 3.0$ V, $F_{CLKOUT} = 1$ Hz, $C_L = 10$ pF		0.03		
<p>⁽¹⁾ Fully operating.</p> <p>⁽²⁾ Clocks operating, RAM registers retained and V_{LOW} sampling working, but temperature sensing and compensation is stopped, CLKOUT is LOW and the I²C interface is disabled ($V_{DD} < 1.4$ V).</p> <p>⁽³⁾ VLF flag indicates a voltage drop below V_{LOW} (typical 1.2 V). Data may no longer be valid and all registers should be reinitialized.</p> <p>⁽⁴⁾ All inputs and outputs are at 0 V or V_{DD}.</p> <p>⁽⁵⁾ 2.2 kΩ pull-up resistors on SCL/SDA, excluding external peripherals and pull-up resistor current. All other inputs (except SDA and SCL) are at 0 V or V_{DD}. Test conditions: Continuous burst read/write, 55h data pattern, 25 μs between each data byte, 20 pF load on each bus pin.</p> <p>⁽⁶⁾ When CLKOUT is enabled the additional V_{DD} supply current ΔI_{DD} can be calculated as follows: $\Delta I_{DD} = C_L \times V_{DD} \times f_{OUT}$, e.g. $\Delta I_{DD} = 10$ pF \times 3.0 V \times 32768 Hz = 980 nA \approx 1 μA</p>						

For this Table, $T_A = -40$ to $+85^\circ\text{C}$ unless otherwise indicated. $V_{DD} = 1.4$ to 5.5 V, TYP values at 25°C and 3.0 V.

Operating Parameters (continued):

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
Inputs						
V_{IH}	HIGH level input voltage	$V_{DD} = 1.4$ V to 5.5 V Pins: SCL, SDA, EVI	$0.8 V_{DD}$			V
V_{IL}	LOW level input voltage				$0.2 V_{DD}$	
I_{LEAK}	Input leakage current	$V_{SS} \leq V_I \leq V_{DD}$ $T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$			± 0.5	μA
C_i	Input capacitance	$V_{DD} = 3.0$ V, $T_A = 25^\circ\text{C}$ $f = 1$ MHz			7	pF
Outputs						
$V_{OH:CLK}$	HIGH level output voltage CLKOUT ≤ 32.768 kHz, $C_{LMAX} = 15$ pF	$V_{DD} = 1.4$ V to < 2.7 V, $I_{OH} = -0.1$ mA $V_{DD} \geq 2.7$ V, $I_{OH} = -1.0$ mA	$0.9 V_{DD}$			V
$V_{OL:CLK}$	LOW level output voltage, CLKOUT ≤ 32.768 kHz, $C_{LMAX} = 15$ pF	$V_{DD} = 1.4$ V to < 2.7 V, $I_{OL} = 0.1$ mA $V_{DD} \geq 2.7$ V, $I_{OL} = 1.0$ mA			$0.1 V_{DD}$	
$V_{OH:CLK}$	HIGH level output voltage CLKOUT > 32.768 kHz to 52 MHz, $C_{LMAX} = 10$ pF	$V_{DD} = 2.7$ V to 5.5 V, $I_{OH} = -2.0$ mA	$0.9 V_{DD}$			
$V_{OL:CLK}$	LOW level output voltage, CLKOUT > 32.768 kHz to 52 MHz, $C_{LMAX} = 10$ pF	$V_{DD} = 2.7$ V to 5.5 V, $I_{OL} = 2.0$ mA			$0.1 V_{DD}$	
t_r, t_f	CLKOUT rise/fall time $0.1 V_{DD}$ to $0.9 V_{DD}$ $V_{DD} = 2.7$ V to 5.5 V	$F_{CLKOUT} \leq 32.768$ kHz, $C_L = 15$ pF		60	100	ns
		32.768 kHz $< F_{CLKOUT} \leq 52$ MHz, $C_L = 10$ pF		-	-	
V_{OL}	LOW level output voltage Pins: SDA, INT	$V_{DD} = 1.4$ V, $I_{OL} = 2.0$ mA			0.4	V
		$V_{DD} = 2.0$ V, $I_{OL} = 3.0$ mA			0.4	
		$V_{DD} = 5.0$ V, $I_{OL} = 3.0$ mA			0.3	
I_{OLEAK}	Output leakage current Pins: SDA, INT	$V_{SS} \leq V_O \leq V_{DD}$ $T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$			± 0.5	μA
C_{OUT}	Output capacitance	$V_{DD} = 3.0$ V, $T_A = 25^\circ\text{C}$ $f = 1$ MHz			7	pF
C_L	CLKOUT load capacitance (without C_{OUT})	$F_{CLKOUT} \leq 32.768$ kHz			15	pF
		32.768 kHz $< F_{CLKOUT} \leq 52$ MHz			10	
δ_{CLKOUT}	CLKOUT duty cycle	$V_{DD} \geq 2.7$ V, $F_{CLKOUT} \leq 52$ MHz		50 ± 10		%
Power On Reset						
V_{POR}	Falling edge threshold voltage	PORF flag is cleared (and reset of all RAM data)	0.9	0.95	1.0	V
	Rising edge threshold voltage	PROF flag is set ⁽⁷⁾	0.95	1.0	1.05	V
$V_{HYS:VPOR}$	V_{POR} detection hysteresis	Rising edge – falling edge		50		mV
Trickle Charger with Charge Pump						
TCM 1.75 V	Regulated voltage (CeraCharge™ mode)	$V_{DD} > V_{TH:LSM}$ (maximum 2.2 V), LSM Mode (BSM = 10)	1.6	1.75	1.9	V
TCM 3.0 V	Charge pump voltage		2.75	3.0	3.25	
TCM 4.5 V			4.1	4.5	4.9	
TCR 0.6 k Ω	Current limiting resistor	$V_{DD} = 5.0$ V, $V_{BACKUP} = 3.0$ V, including internal schottky diode	0.4	0.6	0.8	k Ω
TCR 2 k Ω			1.6	1.9	2.2	
TCR 7 k Ω			5.6	6.9	8.6	
TCR 12 k Ω			9.5	11.8	13.3	
V_F	Schottky diode voltage drop			0.25		V
Switchover (see also BACKUP AND RECOVERY AC ELECTRICAL CHARACTERISTICS)						
$V_{HYS:DSM}$	Switchover hysteresis in Direct Switching Mode	V_{DD} with respect to $V_{BACKUP} \geq 1.5$ V, V_{DD} slew rate = ± 1 V/ms $T_{OPR} = -40$ to $+85^\circ\text{C}$	50	60	130	mV
$V_{TH:LSM}$	Backup switchover threshold voltage in Level Switching Mode	V_{DD} falling below $V_{TH:LSM}$	1.8	2.0	2.2	V
$V_{HYS:LSM}$	Switchover hysteresis in Level Switching Mode	V_{DD} with respect to $V_{BACKUP} = 3.0$ V, V_{DD} slew rate = ± 1 V/ms $T_{OPR} = -40$ to $+85^\circ\text{C}$	80	100	200	mV
⁽⁷⁾ If PORF is set to 1, it can be assumed that some or all RAM registers have been reset (internal voltage was below 0.9 V). Data no longer valid.						

For this Table, T_A = -40 to +85°C unless otherwise indicated. V_{DD} = 1.4 to 5.5 V, TYP values at 25°C and 3.0 V.


Operating Parameters (continued):

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
EEPROM Characteristics						
V _{DD:READ}	V _{DD} read voltage (POR refresh and Automatic refresh)	VDD Power state	1.3			V
	V _{DD} read voltage (Refresh and Read one EEPROM byte) (I ² C used)		1.4			
V _{DD:WRITE}	V _{DD} write voltage		1.6			
V _{DD:EEF}	EEPROM write access failure detection (EEF flag)				1.5	V
t _{PREFR}	POR refresh time ⁽¹⁾	At power up		~66		ms
t _{AREFR}	Automatic refresh time ⁽¹⁾	Each 24 hours, EERD = 0		~1.4		
t _{UPDATE}	Update time ⁽¹⁾	EECMD = 11h		46		
t _{REFR}	Refresh time ⁽¹⁾	EECMD = 12h		1.4		
t _{WRITE}	Write to one EEPROM byte time ⁽¹⁾	EECMD = 21h	1.2	4.8	9	
t _{READ}	Read one EEPROM byte time ⁽¹⁾	EECMD = 22h		1.1		
n _{CYCLE}	Write cycle endurance ⁽²⁾	V _{DD} = 3.0 V, T _A = 25°C	10'000			cycles
		V _{DD} = 5.5 V, T _A = 85°C	100			
t _{RET}	Data retention time ⁽²⁾	T _A = 55°C	10			years

⁽¹⁾ Time until EEBusy status bit is reset to 0.
⁽²⁾ Guaranteed by indirect testing.



7.2.1. TEMPERATURE COMPENSATION AND CURRENT CONSUMPTION

Typical average current I_{AVER} (I_{DD} or I_{BACKUP}):

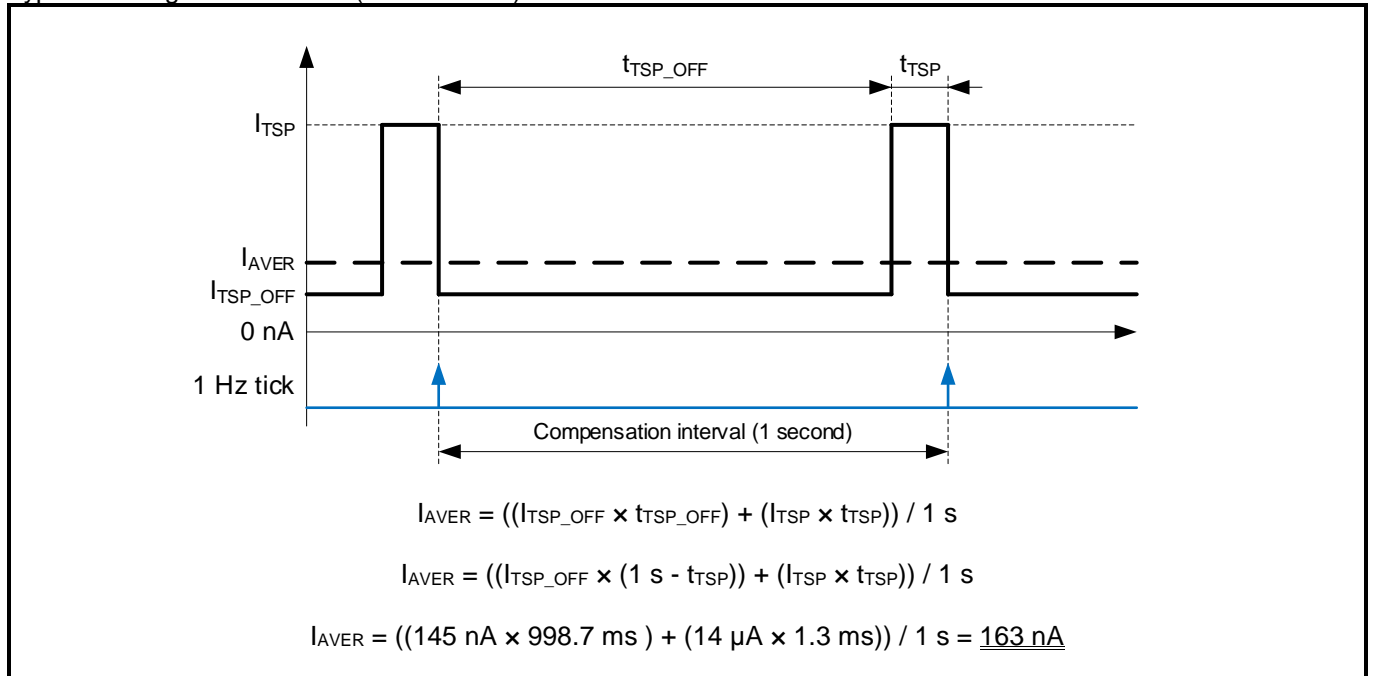

7.2.2.TYPICAL CHARACTERISTICS

Typical characteristics for Direct Switching Mode (DSM), Level Switching Mode (LSM) and switchover disabled: For these diagrams, I²C-bus inactive, CLKOUT disabled.

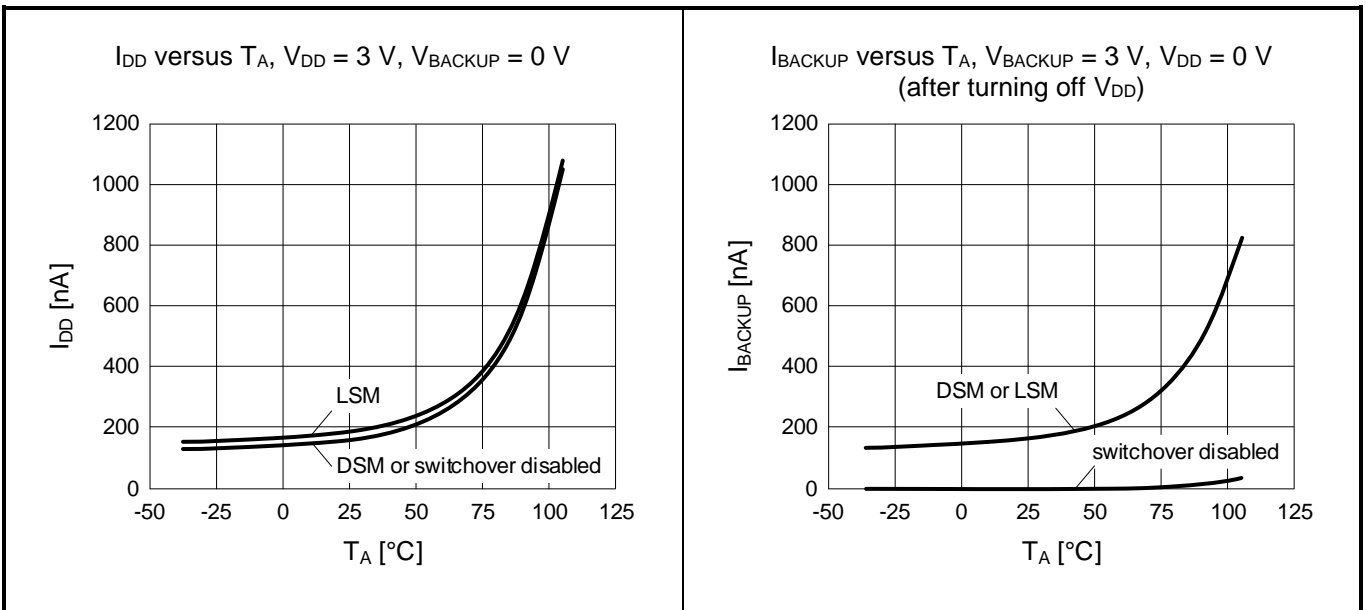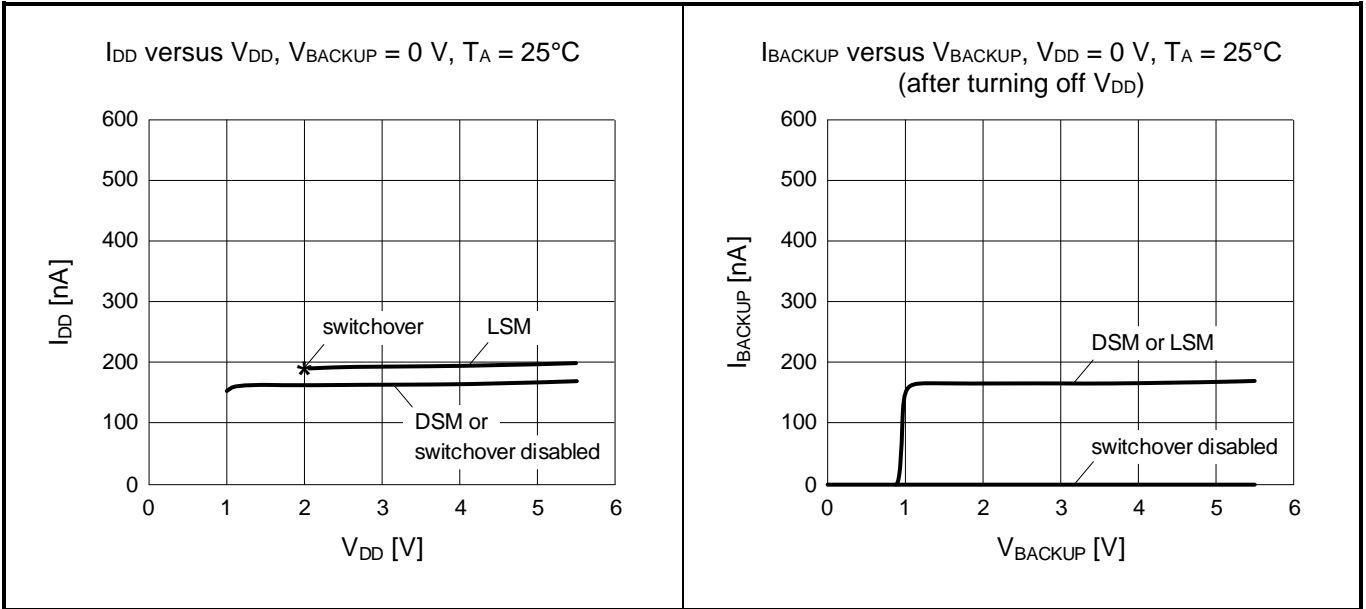


7.3. XTAL OSCILLATOR PARAMETERS

For this Table, $T_A = -40$ to $+85^\circ\text{C}$ unless otherwise indicated. $V_{DD} = 1.4$ to 5.5 V, TYP values at 25°C and 3.0 V.

Oscillator Parameters:

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
Xtal General						
F	Crystal Frequency			32.768		kHz
t_{START}	Oscillator start-up time at $V_{DD} = 3.0$ V	$T_A = 25^\circ\text{C}$		0.1	0.5	s
		$T_A = -40$ to $+105^\circ\text{C}$			3	
V_{START}	Oscillator start-up voltage	$T_A = -40$ to $+105^\circ\text{C}$	1.3			V
$\Delta f/V$	Frequency vs. voltage characteristics	$V_{DD} = 1.5$ V to 5.5 V $T_A = 25^\circ\text{C}$		0.5	1	ppm/V
V_{DDR}	V_{DD} rising slew rate (Clock maintenance slew rate)	$V_{DD} = 1.1$ V to 3.6 V			5	V/ μs
		$V_{DD} = 3.6$ V to 5.5 V			15	
V_{DDF}	V_{DD} falling slew rate (Clock maintenance slew rate)	$V_{DD} = 5.5$ V to 1.1 V			2	
δ_{CLKOUT}	CLKOUT duty cycle	$V_{DD} = 1.1$ V to 5.5 V $F_{CLKOUT} = 32.768$ kHz		50 \pm 10		%
Xtal Frequency Characteristics						
$\Delta F/F$	Frequency accuracy	$T_A = 25^\circ\text{C}$			± 50	ppm
$\Delta F/F_{TOPR}$	Frequency vs. temperature characteristics	$T_{OPR} = -40$ to $+105^\circ\text{C}$ $V_{DD} = 3.0$ V	$-0.035^{\text{ppm}/^\circ\text{C}^2} (T_{OPR} - T_0)^2 \pm 10\%$			ppm
T_0	Turnover temperature		$+25 \pm 5$			$^\circ\text{C}$
$\Delta F/F$	Aging first year max.	$T_A = 25^\circ\text{C}$, $V_{DD} = 3.0$ V			± 3	ppm
Digital Temperature Compensated Xtal DTCXO						
$\Delta t/t$	Time accuracy calibrated, OFFSET = 0 (default value on delivery). CLKOUT measured on rising edge of One 1 Hz period	$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$		± 1	± 2.5	ppm
		$T_A = +85^\circ\text{C}$ to $+105^\circ\text{C}$		± 0.09	± 0.22	s/day
						± 20
					± 1.73	s/day
$\Delta t/t$	1 Hz OFFSET value: Min. corr. step (LSB) and Max. corr. range	$T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$	± 0.2384		$+7.391/$ -7.629	ppm
$\Delta t/t$	OFFSET. Achievable time accuracy.	Calibrated at an initial temperature and voltage	-0.1192		+0.1192	ppm
ΔT	Temperature sensor accuracy calibrated, TREF = preconfigured (Factory Calibrated)	$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$		± 1	± 3	$^\circ\text{C}$
		$T_A = +85^\circ\text{C}$ to $+105^\circ\text{C}$			± 7	
ΔT	TREF value: Min. corr. step (LSB)	$T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$	± 0.0078125			$^\circ\text{C}$
$\Delta T/V$	Temperature sensor value vs. voltage characteristics	$V_{DD} = 1.5$ V to 5.5 V $T_A = 25^\circ\text{C}$		0.1		$^\circ\text{C}/\text{V}$


7.3.1.TIME ACCURACY VS. TEMPERATURE CHARACTERISTICS

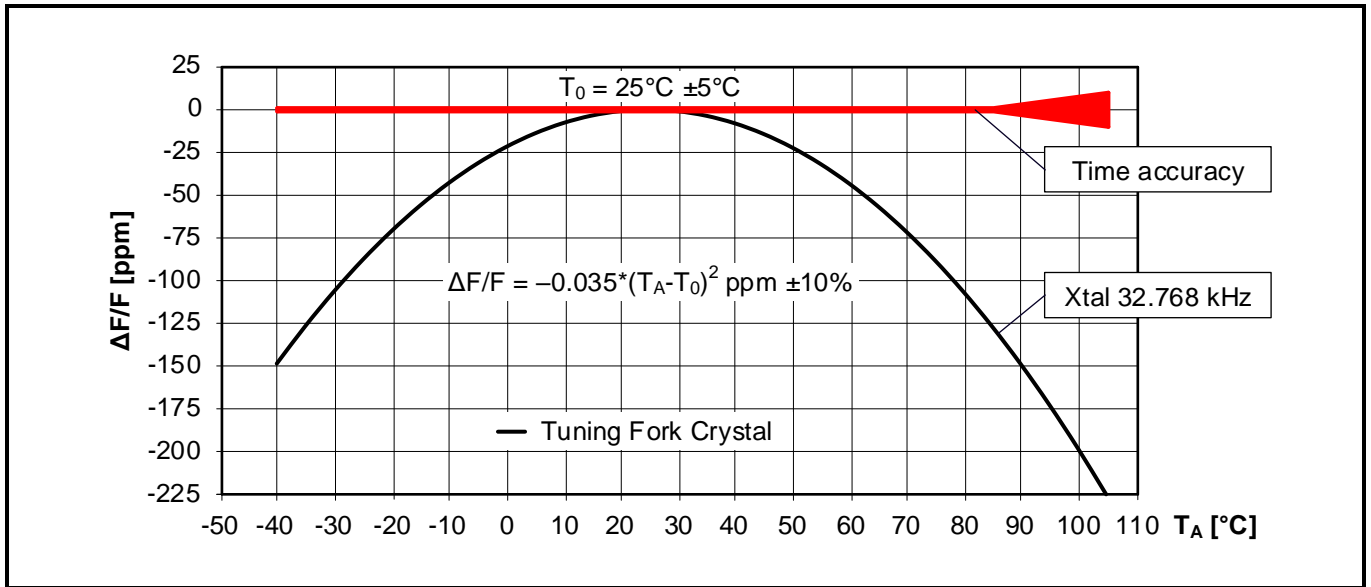


7.3.2.TIME ACCURACY 1 HZ EXAMPLES

The following curves are with OFFSET = 0 (default value on delivery). Fine adjustment in the vertical direction can be done by determining an OFFSET value (see AGING CORRECTION).

Time accuracy of the temperature compensated 1 Hz signal at CLKOUT pin, $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$:

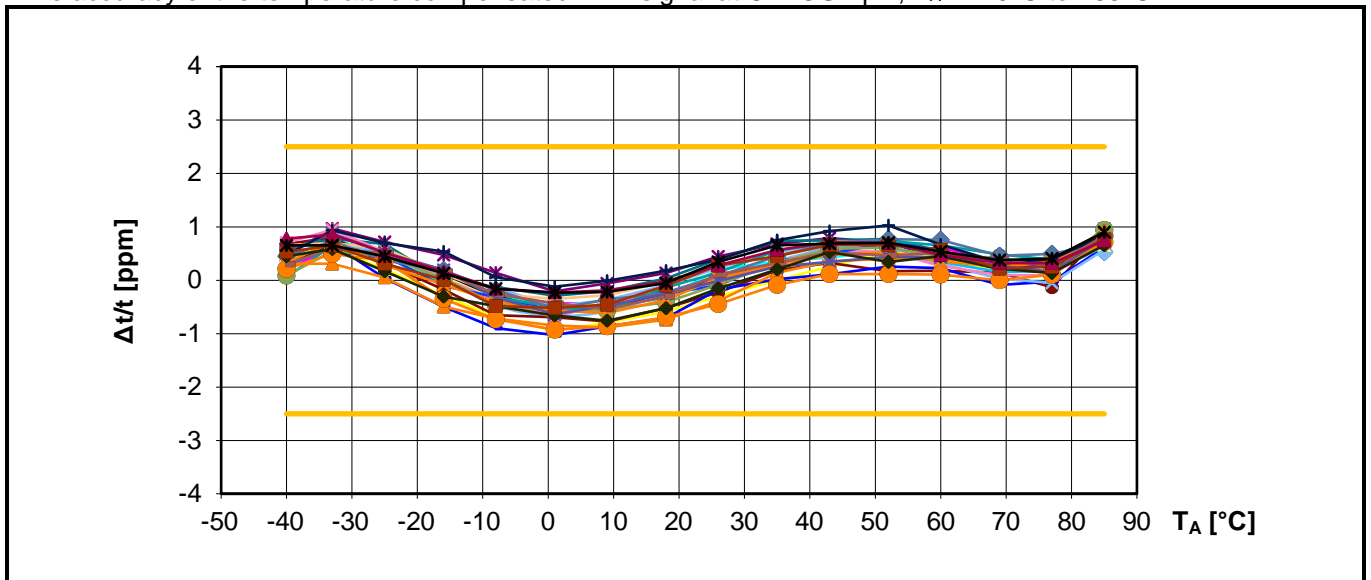


Time accuracy of the temperature compensated 1 Hz signal at CLKOUT pin, including extended range from $+85^{\circ}\text{C}$ to $+105^{\circ}\text{C}$:

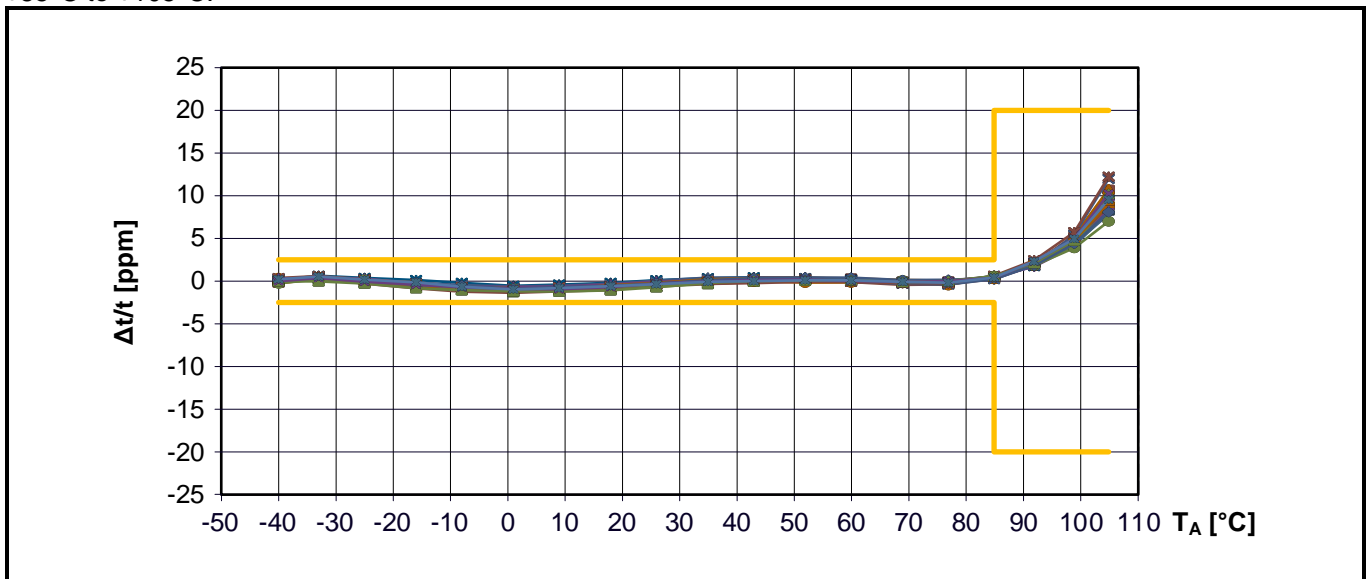


7.3.3.TEMPERATURE SENSOR ACCURACY EXAMPLE

The following curves are made with preconfigured (Factory Calibrated) TREF value. Fine adjustment in the vertical direction can be done by determining a new TREF value (see TEMPERATURE REFERENCE ADJUSTMENT). For this diagram, RTC module is in VDD Power state so that the TEMP value can be read with I²C.

Calibrated Temperature sensor accuracy, T_A = -40°C to +85°C:

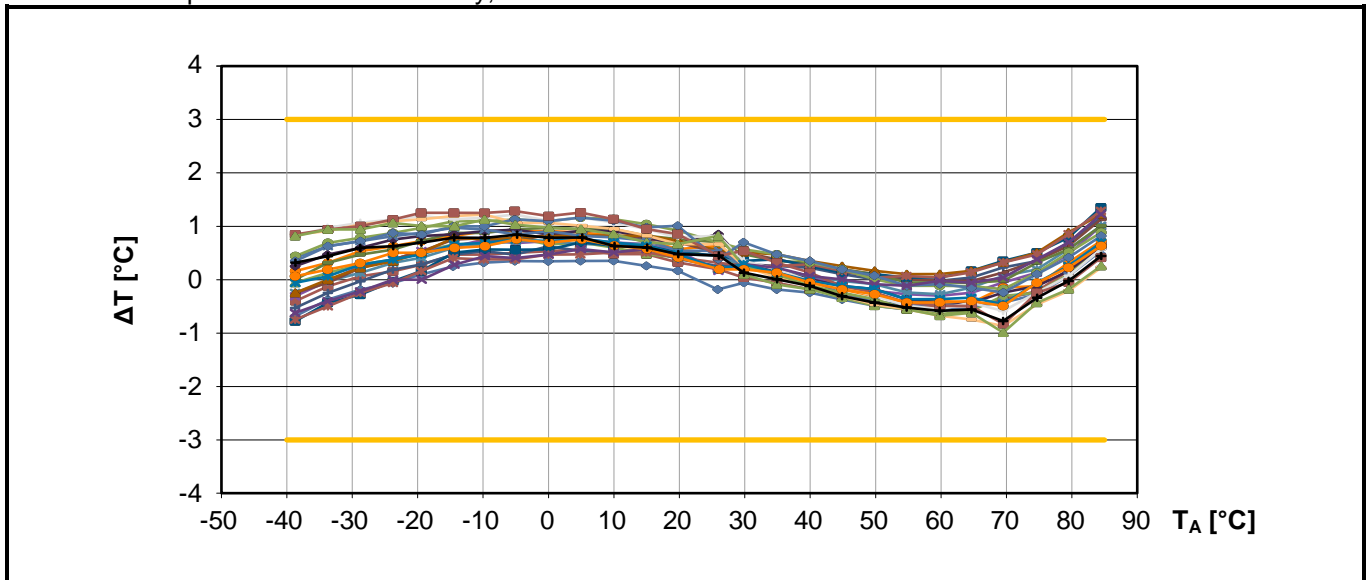


Calibrated Temperature sensor accuracy, including extended range from +85°C to +105°C:

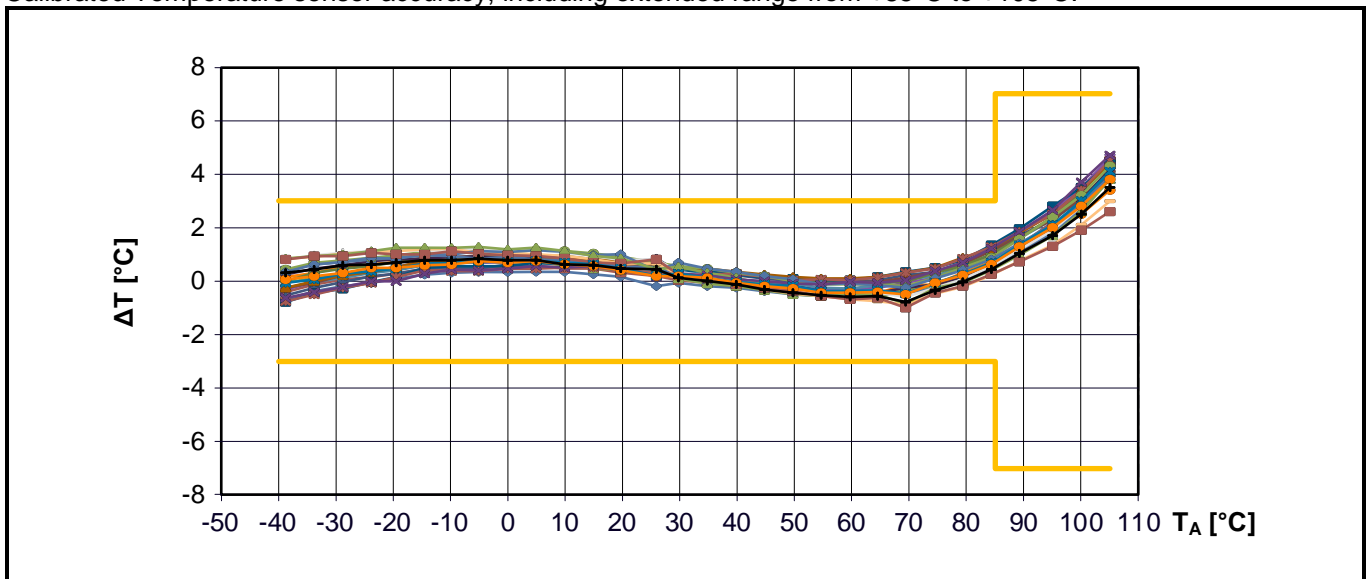

7.4. POWER ON AC ELECTRICAL CHARACTERISTICS

The following Figure describes the power on AC electrical characteristics for the CLKOUT pin. The clock output signal on CLKOUT pin is primarily controlled by the NCLKE bit (EEPROM C0h), and OS bit and the FD and HFD fields (EEPROM C1h). See also PROGRAMMABLE CLOCK OUTPUT and POWER ON RESET INTERRUPT FUNCTION.

Power On AC Electrical Characteristics: Example with Power On Reset Interrupt and CLKOUT enabled.

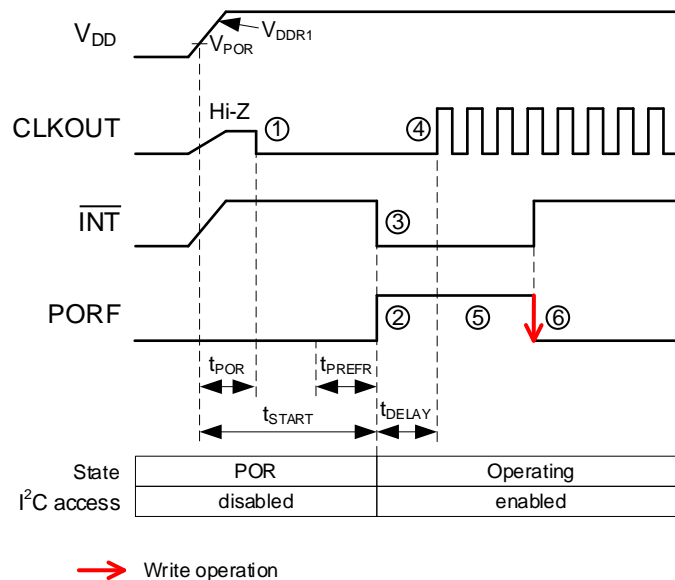

- ① CLKOUT is set to LOW, after power on reset t_{POR} = typical 6 ms where CLKOUT is high-impedance (Hi-Z).
- ② Flag PORF is set because V_{DD} was below V_{POR} (Power On Reset event detected).
- ③ If the PORIE bit (EEPROM C1h) was set to 1 beforehand (in EEPROM), the PORIE bit in the RAM mirror is set to 1 after the typical start-up time t_{START} = 0.1 s including the first refreshment time t_{PREFR} = ~66 ms and the \overline{INT} pin output goes LOW.
- ④ Depending of the settings of the NCLKE bit (EEPROM C0h), and OS bit and the FD and HFD fields (EEPROM C1h) the CLKOUT pin can drive the following signals:
 - Square wave of 32.768 kHz (default value on delivery), 1024 Hz, 64 Hz or 1 Hz, or an HFD frequency (8.192 kHz to 67.109 MHz in 8.192 kHz steps).
 - When NCLKE bit is 1 the CLKOUT signal is set to LOW level (if CLKF = 0).
 CLKOUT is enabled after a typical delay time t_{DELAY} , which depends on the selected frequency (synchronized enable). See the Power On AC Electrical Parameters on the next page.
- ⑤ The PORF flag remains 1 until it is cleared to 0 by software.
- ⑥ If the \overline{INT} pin is LOW, its status changes as soon as the PORF flag is cleared to 0.

For this Table, $T_A = -40$ to $+105^\circ\text{C}$ and $V_{DD} = 1.3$ to 5.5 V, TYP values at 25°C and 3.0 V.

Power On AC Electrical Parameters:

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
V_{DDR1}	V_{DD} rising slew rate at initial power on reset (POR)		10		55	V/ms
t_{POR}	Power on reset			6	10	ms
t_{START}	Oscillator start-up time at $V_{DD} = 3.0$ V (1)	$T_A = 25^\circ\text{C}$		0.1	0.5	s
V_{START}	Oscillator start-up voltage		1.3			V
t_{PREFR}	First refreshment time			66		ms
t_{DELAY}	CLKOUT enable delay time (synchronized enable)	FD = 32768 Hz		0.95		ms
		FD = 1024 Hz		1.28		
		FD = 64 Hz		6.65		
		FD = 1 Hz		999		
		HFD = 1.007616 MHz (example)		2.8		
⁽¹⁾ If $V_{DD} \geq 1.4$ V, software can check I ² C Acknowledge to get the shortest time I ² C interface is active after Power On. Or, when enabled, the POR interrupt can be used to do this.						


7.5. BACKUP AND RECOVERY AC ELECTRICAL CHARACTERISTICS

As long as no voltage drop of the internal voltage (V_{DD} or V_{BACKUP}) under V_{LOW} (maximum 1.3 V) is detected the module is in timekeeping mode and fully operating.

If the internal voltage falls below V_{LOW} but is still in minimum timekeeping range (minimum 1.05 V) ($V_{POR MAX}$), clocks are operating, RAM registers are retained and V_{LOW} sampling working, but temperature sensing and compensation is stopped, CLKOUT is LOW and the I²C interface ($V_{DD} < 1.4$ V) is disabled. Data may no longer be valid and all registers should be reinitialized.

1. If you want to use the CLKOUT function, select a valid V_{DD} range ($1.3\text{ V} < V_{DD} \leq 5.5\text{ V}$). See also VOLTAGE LOW DIAGRAM.
2. Ensure that the slew rates V_{DDF} and V_{DDR2} fulfill their specifications.
3. Check if these required specifications are fulfilled on your system.

V_{DD} Backup and recovery AC Electrical Characteristics: Example with Direct Switching Mode.

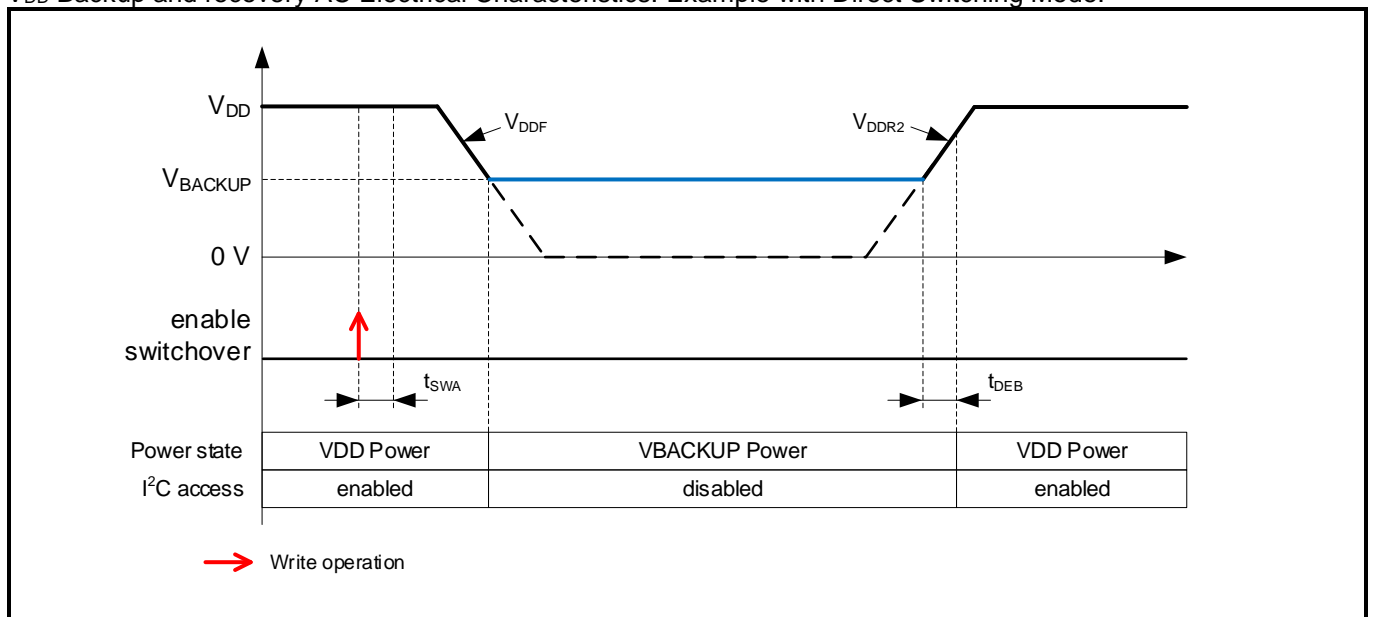

For this Table, $T_A = -40^{\circ}\text{C}$ to $+105^{\circ}\text{C}$ unless otherwise indicated.

V_{DD} Backup and recovery AC Electrical Parameters:


SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
t_{SWA}	Backup switchover function activation time	Changing from SWITCHOVER DISABLED to DSM			2	ms
		Changing from SWITCHOVER DISABLED to LSM			10	
V_{DDF}	V_{DD} falling slew rate				550	V/ μ s
V_{DDR2}	V_{DD} rising slew rate	Rising from 1.5 V to V_{DD}			400	V/ μ s
t_{DEB}	Debounce time from V_{DD} debounce logic, when switching back from V_{BACKUP} to V_{DD}	Internal voltage was always above V_{LOW} (typical 1.2 V). VLF = 0.			1	ms
		Internal voltage was between V_{LOW} (typical 1.2 V) and V_{POR} (maximum 1.05 V). VLF = 1. (1)			1000	

(1) When VLF flag was set, the debounce time t_{DEB} can take up to 1 second because 1 Hz sampling is used to detect if internal voltage is back above V_{LOW} (typical 1.2 V). If $V_{DD} \geq 1.4$ V, software can check I²C Acknowledge to get the shortest time I²C interface is active again.

7.6. I²C-BUS CHARACTERISTICS

The following Figure and Table describe the I²C AC electrical parameters.

I²C AC Parameter Definitions:

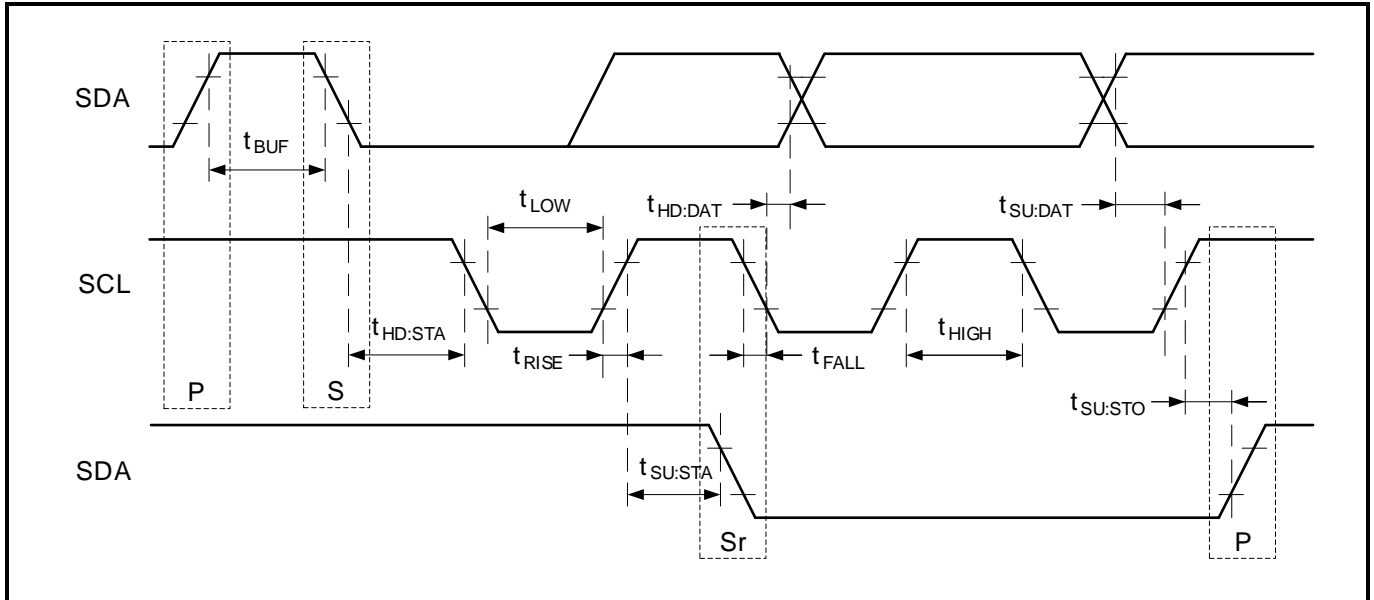

For the following Table, $T_A = -40$ to $+85^\circ\text{C}$.

I²C AC Electrical Parameters:

SYMBOL	PARAMETER	$V_{DD} \geq 1.4 \text{ V}$		$V_{DD} \geq 2.0 \text{ V}$		UNIT
		MIN	MAX	MIN	MAX	
f_{SCL}	SCL input clock frequency	0	100	0	400	kHz
t_{LOW}	Low period of SCL clock	4.7		1.3		μs
t_{HIGH}	High period of SCL clock	4.0		0.6		μs
t_{RISE}	Rise time of SDA and SCL		1000		300	ns
t_{FALL}	Fall time of SDA and SCL		300		300	ns
$t_{HD:STA}$	START condition hold time	4.0		0.6		μs
$t_{SU:STA}$	START condition setup time	4.7		0.6		μs
$t_{SU:DAT}$	SDA setup time	250		100		ns
$t_{HD:DAT}$	SDA hold time	0		0		μs
$t_{SU:STO}$	STOP condition setup time	4.0		0.6		μs
t_{BUF}	Bus free time before a new transmission	4.7		1.3		μs

S = Start condition, Sr = Repeated Start condition, P = Stop condition

Caution:

When accessing the RV-3032-C7, all communication from transmitting the Start condition to transmitting the Stop condition after access should be completed within 950 ms.

If such communication requires 950 ms or longer, the I²C-bus interface is reset by the internal bus timeout function.

8. TYPICAL APPLICATION CIRCUITS


8.1. NO BACKUP SOURCE / EVENT INPUT NOT USED

Application Key Points:

- No V_{BACKUP} source
- Lowest current consumption (160 nA typ.)
- CLKOUT settings stored in EEPROM for permanent configuration

Register Configuration:

0. RTC with default configuration on delivery (bits in black)										
1.	Register C0h	0	1	0	0	0	0	0	0	NCLKE → CLKOUT disabled
	Register C2h	X	X	X	X	X	X	X	X	HFD → High freq. to be selected
	Register C3h	OS	FD	HFD[12:8]				OS	FD	HFD
		X	X	X	X	X	X	X	X	
2. CLKOUT settings (C0h, C2h and C3h) to be stored in EEPROM using procedure of 4.6.3.										

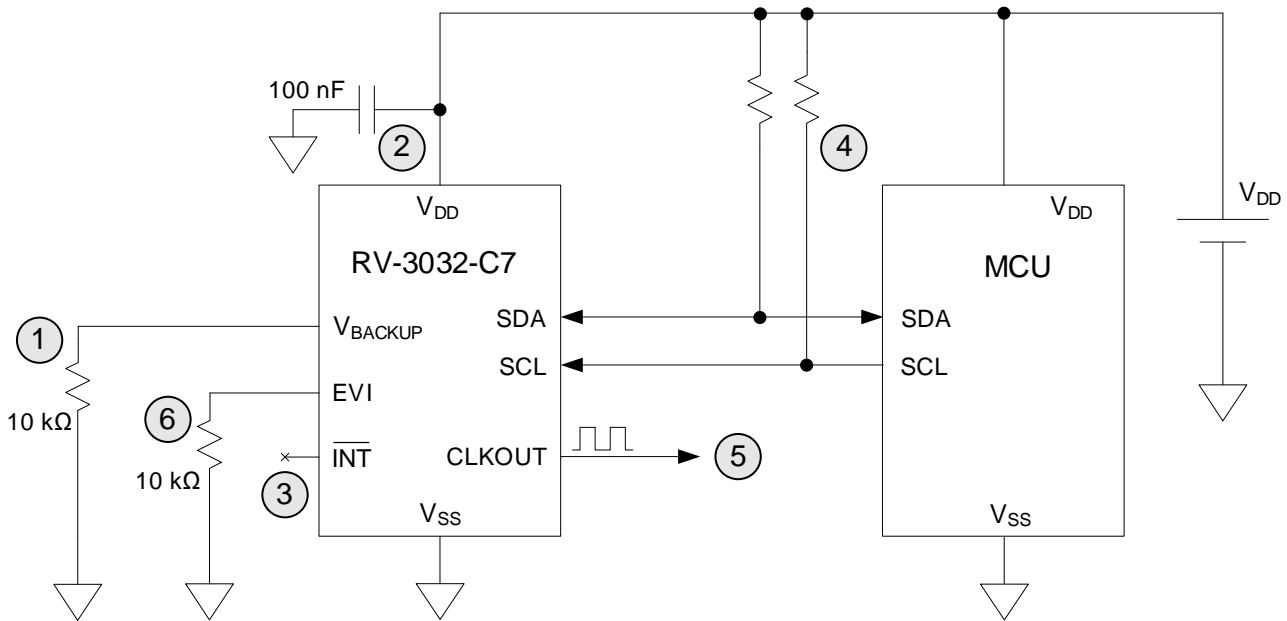

- ① Backup Switchover functionality is disabled by default (default value on delivery). Do not leave V_{BACKUP} power supply pin floating. Connection to V_{SS} through a 10 kΩ resistor keeps functional test possible.
- ② 100 nF decoupling capacitor close to the device.
- ③ Interrupts are disabled by default. PORIE and VLIE are disabled (default values on delivery). $\overline{\text{INT}}$ pin is an open-drain output, which can be left open when not used.
- ④ I²C lines SCL, SDA are open-drain and require pull-up resistors to V_{DD}.
- ⑤ CLKOUT with a frequency of 32.768 kHz (1) is enabled by default (default value on delivery). If not used, disable CLKOUT to minimize current consumption (NCLKE = 1 and CLKF = 0).
- ⑥ External Events functionality is always active in V_{DD} Power state. Do not leave EVI input pin floating. Connection to V_{SS} through a 10 kΩ resistor keeps functional test possible. Note that in this example (EVI to V_{SS}) the EVF flag will be set at POR.

(1) CLKOUT offers the selectable frequencies 32.768 kHz (default value on delivery), 1024 Hz, 64 Hz or 1 Hz, or a frequency between 8192 Hz to 67.109 MHz in 8192 Hz steps for application use.


8.2. NON-RECHARGEABLE BACKUP SOURCE / EVENT INPUT USED (ACTIVE HIGH)

Application Key Points:

- Trickle charger disabled to avoid dangerous charging current into the backup source
- LSM Backup Switchover Mode to avoid non-desired backup switching ($V_{TH:LSM} = 2.0\text{ V}$)
- Power Management settings have to be stored in EEPROM for permanent configuration
- Rising edge or high-level voltage applied to the EVI input triggers an interrupt

Register Configuration:

0.	RTC with default configuration on delivery (bits in black)										
1.	Register 11h	0	0	0	0	0	1	0	0	EIE → Event interrupt enabled	
	Register 15h	EHL		ET						EHL → Event-high detection	
		0	1	X	X	0	0	0	0	ET → Event filtering to be set	
Register C0h	NCLKE		BSM		TCR		TCM		BSM → LSM switchover mode		
	0	X	1	0	0	0	0	0	TCM → Trickle charger disabled		
2.	Switchover and CLKOUT settings (C0h) to be stored in EEPROM using procedure of 4.6.3.										

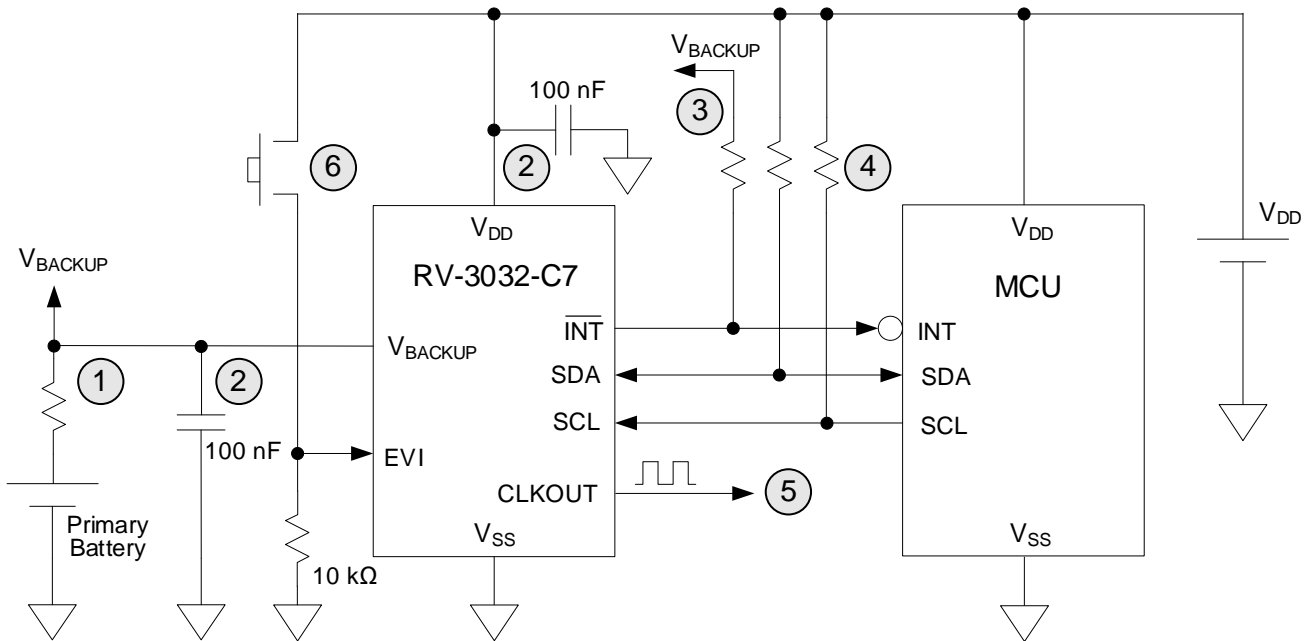

- ① Insert a protection resistor of 100 – 1000 Ω to prevent damage in case of soldering issues causing short between supply pins.
- ② 100 nF decoupling ceramic capacitor close to the device for V_{DD} and V_{BACKUP} .
- ③ The \overline{INT} signal also works when the device operates on V_{BACKUP} supply voltage. In that case, it is possible to tie the \overline{INT} signal pull-up resistor to V_{BACKUP} .
- ④ I²C lines SCL, SDA are open-drain and require pull-up resistors to V_{DD} .
- ⑤ CLKOUT is disabled in V_{BACKUP} Power state. If not used in V_{DD} Power state, disable CLKOUT to minimize current consumption ($NCLKE = 1$ and $CLKF = 0$).
- ⑥ EVI input set to detect rising edge or high-level of tamper detection signal; The EVI input is never floating thanks to the 10 kΩ to V_{SS} .


8.3. RECHARGEABLE BACKUP SOURCE / EVENT INPUT USED (ACTIVE LOW)

Application Key Points:

- MLCC, Supercap or Rechargeable Battery as secondary V_{BACKUP} source
- DSM Backup Switchover Mode for capacitors (or LSM for rechargeable battery)
- Backup source charged through the trickle charger with charge pump
- Power Management settings have to be stored in EEPROM for permanent configuration

Register Configuration:

0.	RTC with default configuration on delivery (bits in black)									
1.	Register 11h	0	0	0	0	0	1	0	0	EIE → Event interrupt enabled
	Register 15h	0	EHL 0	ET X	X	0	0	0	0	EHL → Event-low detection ET → Event filtering to be set
	Register C0h	0	NCLKE X	BSM 0	1	TCR X	X	TCM X	X	BSM → DSM switchover mode TCR → Trickle resistor to be set TCM → Trickle mode to be set
2.	Switchover and CLKOUT settings (C0h) to be stored in EEPROM using procedure of 4.6.3.									

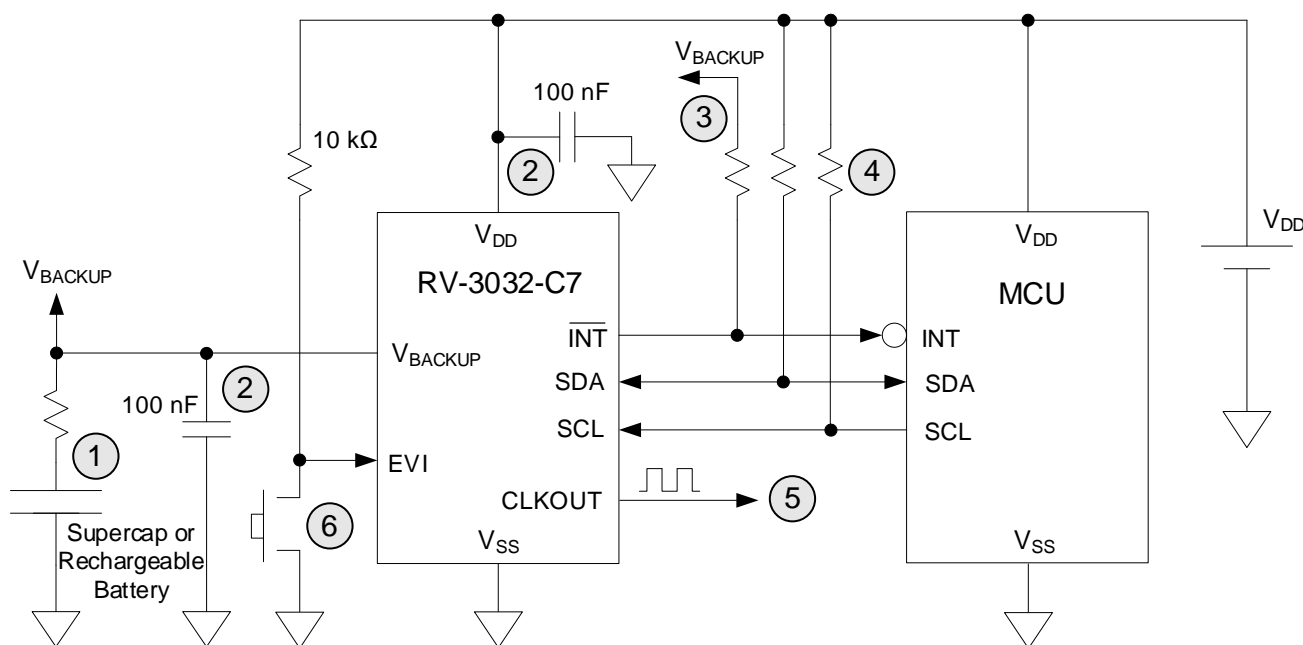

- ① Low-cost MLCC (1) ceramic capacitor, supercapacitor (e.g. 1 farad) or secondary battery LMR (respect manufacturer specifications for constant charging voltage).
When Lithium Battery is used, it is recommended to insert a protection resistor of 100 – 1000 Ω. to limit battery current and to prevent damage in case of soldering issues causing short between supply pins.
- ② 100 nF decoupling ceramic capacitor close to the device for V_{DD} and V_{BACKUP} .
- ③ The \overline{INT} signal also works when the device operates on V_{BACKUP} supply voltage.
In that case, it is possible to tie the \overline{INT} signal pull-up resistor to V_{BACKUP} .
- ④ I²C lines SCL, SDA are open-drain and require pull-up resistors to V_{DD} .
- ⑤ CLKOUT is disabled in V_{BACKUP} Power state. If not used in V_{DD} Power state, disable CLKOUT to minimize current consumption (NCLKE = 1 and CLKF = 0).
- ⑥ EVI input set to detect falling edge or low-level of tamper detection signal;
The EVI input is never floating thanks to the 10 kΩ to V_{DD} .

(1) Note, that low-cost MLCCs are normally used for short timekeeping (minutes) and the more expensive supercapacitors for a longer backup time (days - weeks).


8.4. CERACHARGE™ BACKUP BATTERY / EVENT INPUT NOT USED

Application Key Points:

- TDK's CeraCharge™ - Rechargeable solid-state SMD battery as secondary V_{BACKUP} source
- LSM Backup Switchover Mode (V_{TH:LSM} = 2.0 V). LSM also required for TCM 1.75V to be selected.
- CeraCharge™ charged with constant voltage (CV) through the trickle charger with charge pump
- Power Management settings have to be stored in EEPROM for permanent configuration

Register Configuration:

0.	RTC with default configuration on delivery (bits in black)									
1.	Register C0h	0	X	1	0	1	1	0	1	BSM → LSM switchover mode TCR → 12 kΩ series resistor TCM → 1.75 V regulated voltage
2.	Switchover and CLKOUT settings (C0h) to be stored in EEPROM using procedure of 4.6.3.									

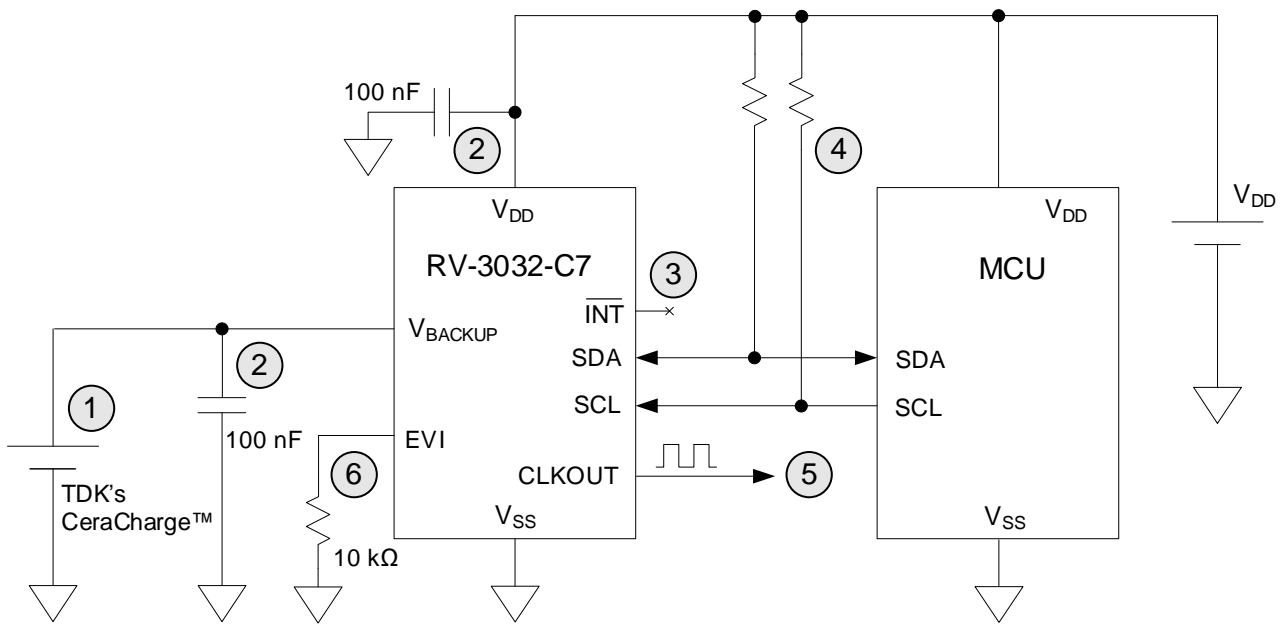

- ① First charging of the TDK's CeraCharge™ (1) must be applied after soldering. Polarity will be applied with the first charging. Maximum current: < 200 μA (End current: < 10 μA). Calculated maximum current: 1.75 V / 12 kΩ = 146 μA. Settings: BSM = LSM Mode, TCR = 12 kΩ, TCM = 1.75 V.
- ② 100 nF decoupling ceramic capacitor close to the device for V_{DD} and V_{BACKUP}.
- ③ Interrupts are disabled by default. PORIE and VLIE are disabled (default values on delivery). $\overline{\text{INT}}$ pin is an open-drain output, which can be left open when not used.
- ④ I²C lines SCL, SDA are open-drain and require pull-up resistors to V_{DD}.
- ⑤ CLKOUT is disabled in V_{BACKUP} Power state. If not used in V_{DD} Power state, disable CLKOUT to minimize current consumption (NCLKE = 1 and CLKF = 0).
- ⑥ External Events functionality is always active in V_{DD} Power state. Do not leave EVI input pin floating. Connection to V_{SS} through a 10 kΩ resistor keeps functional test possible. Note that in this example (EVI to V_{SS}) the EVF flag will be set at POR.

(1) Note, that the CeraCharge™ is normally used for longer backup time (days - weeks). See also <https://www.tdk-electronics.tdk.com/en/ceracharge>.


8.5. NO BACKUP SOURCE / EVENT INPUT USED (“WAKE-UP” & “POWER SWITCH”)

Application Key Points:

- No V_{BACKUP} source and lowest current consumption (160 nA typ.)
- External Event enabled allowing RTC to fire “wake-up” interrupt acting on load switch
- MCU most of the time in idle mode is awoken by RTC’s interrupt through the upper load switch
- MCU holds supply voltage until its task is finished and cuts off its own supply voltage

Register Configuration:


0.	RTC with default configuration on delivery (bits in black)									
1.	Register 10h	0	0	0	0	0	1	0	0	EIE → Event interrupt enabled
	Register 15h	0	EHL	ET	X	X	0	0	0	EHL → Event-high detection ET → Event filtering to be set

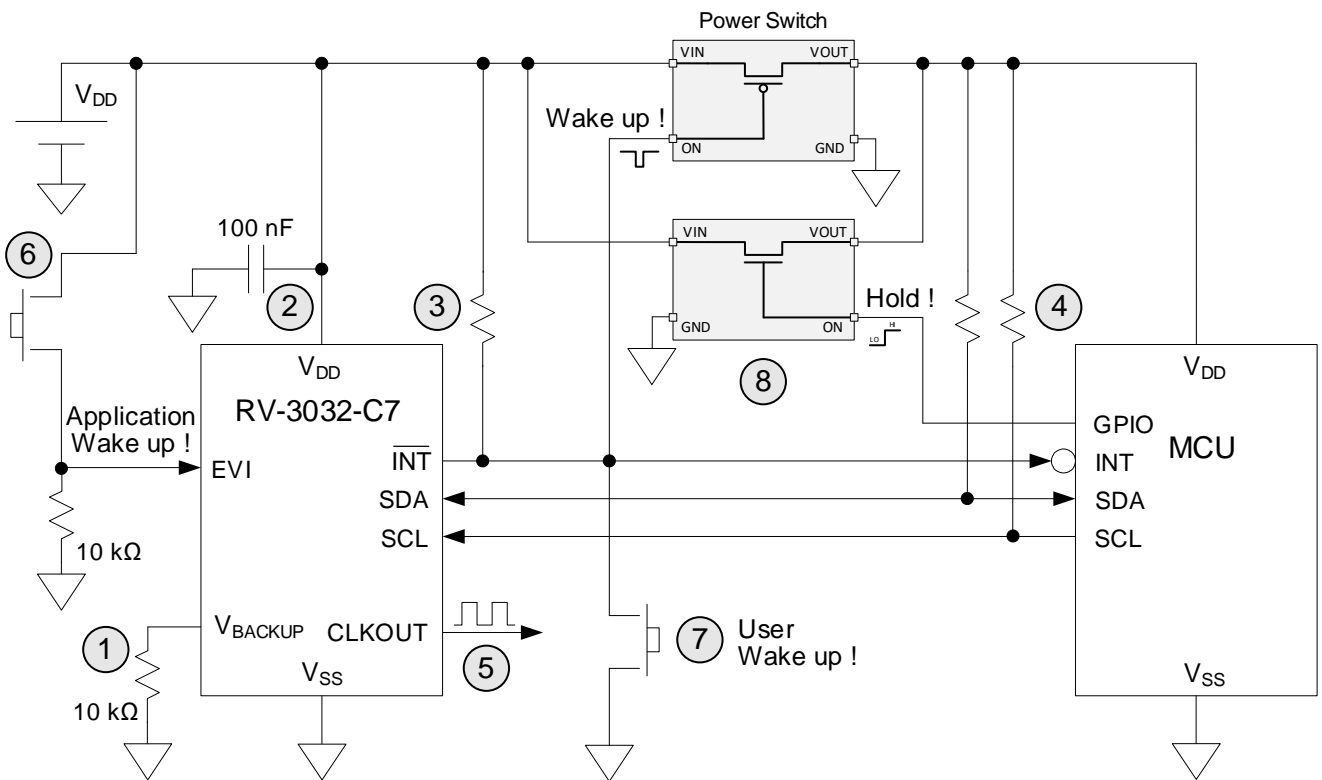

- Backup Switchover functionality is disabled by default. Do not leave V_{BACKUP} power supply pin floating. Connection to V_{SS} through a 10 kΩ resistor keeps functional test possible.
- 100 nF decoupling capacitor close to the device.
- \overline{INT} pin is an open-drain output and requires a pull-up resistor.
- I²C lines SCL, SDA are open-drain and require pull-up resistors to V_{DD} .
- Disable CLKOUT to minimize current consumption (NCLKE = 1 and CLKF = 0).
- EVI input set to detect rising edge or high-level of tamper detection signal; can be used as an Application Wake-Up signal. The EVI Input is never floating thanks to the 10 kΩ to V_{SS} .
- User or Manual Wake-Up, always available; e.g for initial system power-on to configure RTC and system.
- MCU Power Retention via GPIO = High maintains MCU Power to complete I²C Interface communication with the RTC. MCU cuts-off it’s own supply voltage by set GPIO = Low at the very end of its task.


9. PACKAGE

9.1. DIMENSIONS AND SOLDER PAD LAYOUT

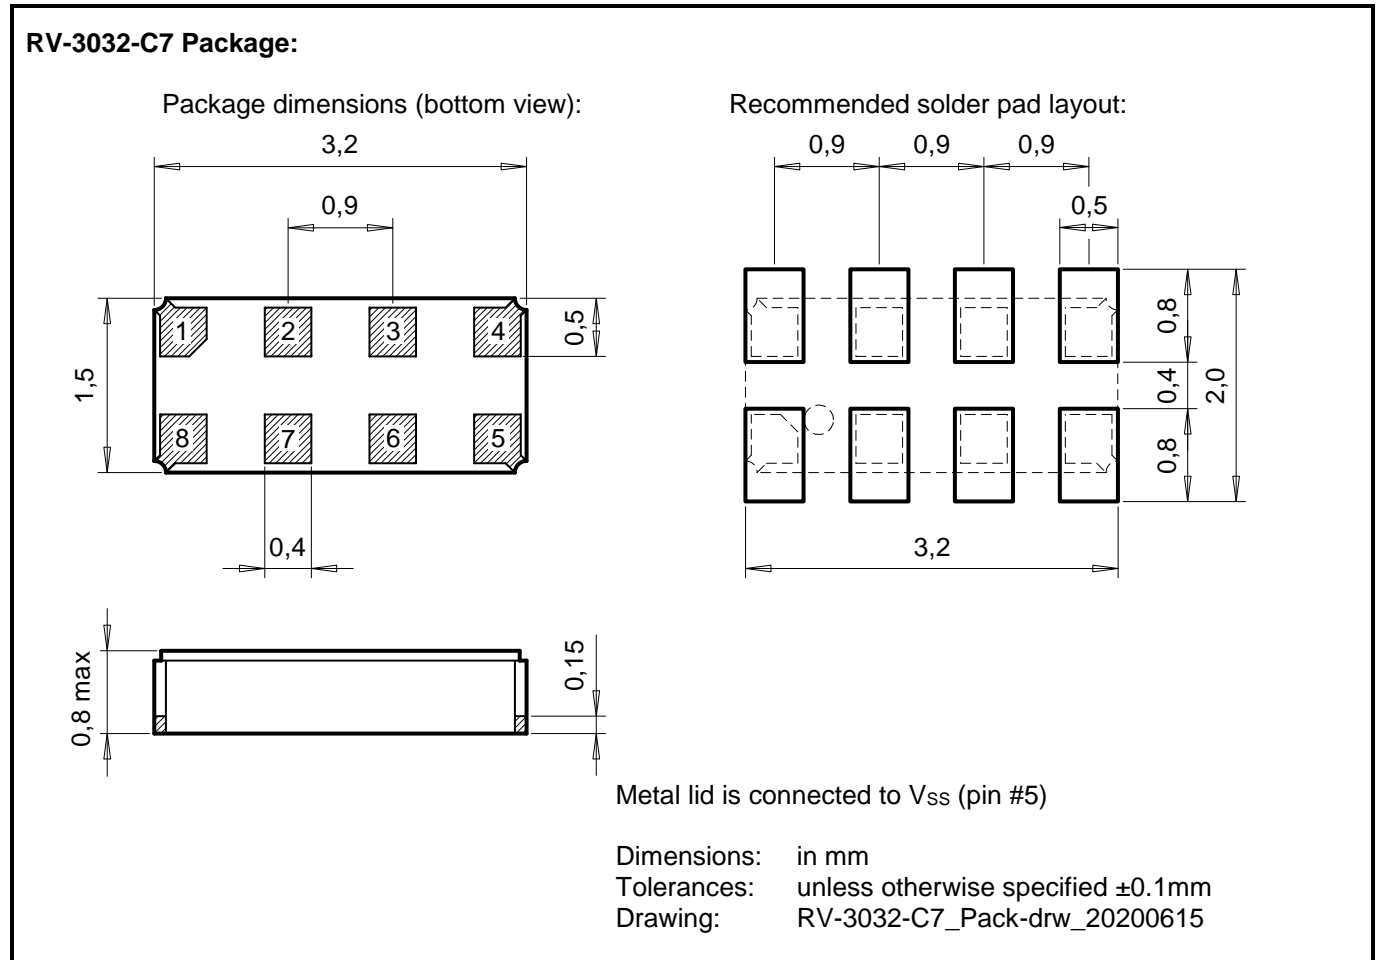


9.1.1. RECOMMENDED THERMAL RELIEF

When connecting a pad to a copper plane, thermal relief is recommended.

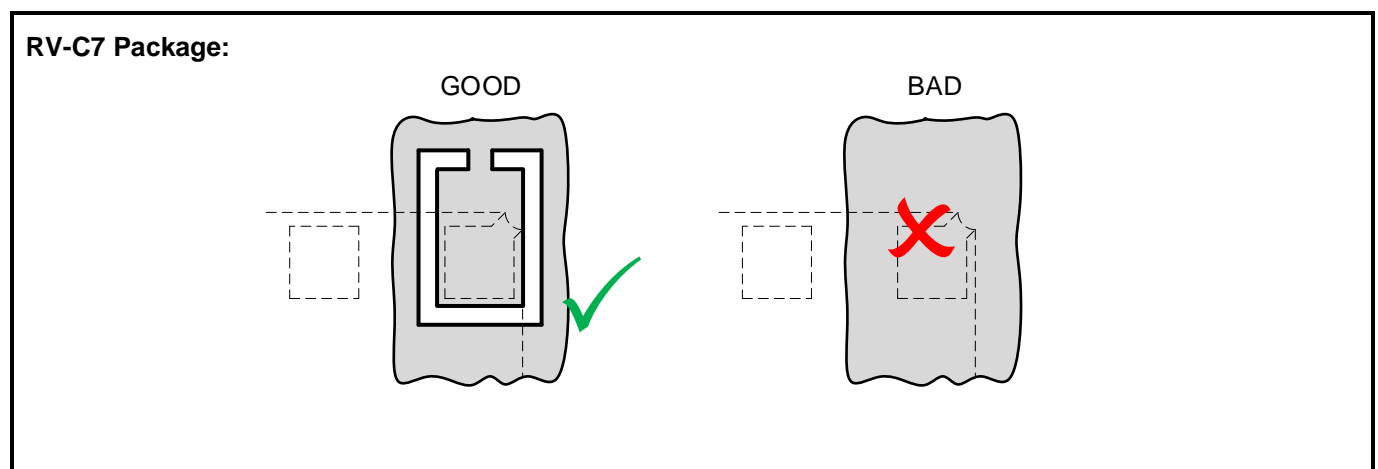

9.2. MARKING AND PIN #1 INDEX

Laser marking RV-3032-C7 Package: (top view)

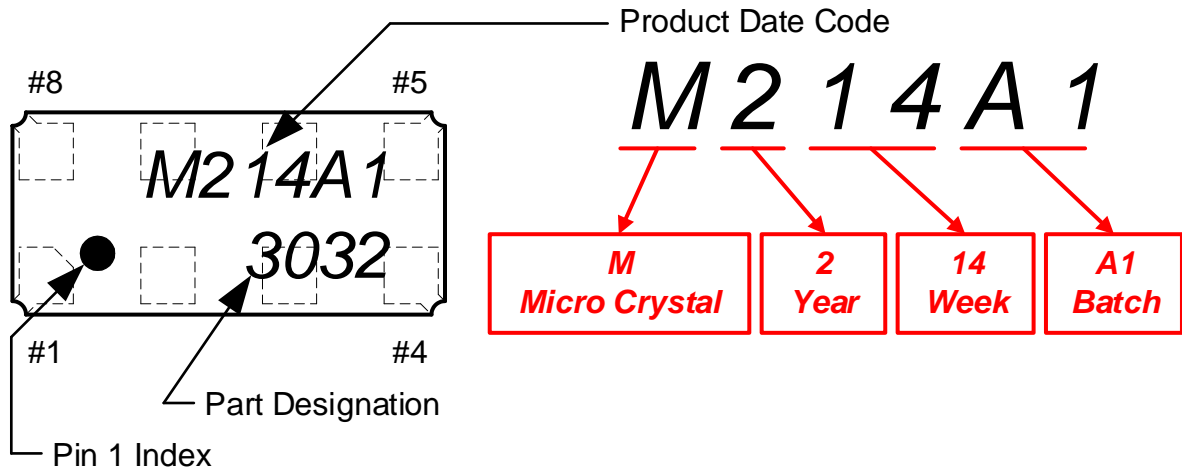


10.MATERIAL COMPOSITION DECLARATION & ENVIRONMENTAL INFORMATION

10.1.HOMOGENOUS MATERIAL COMPOSITION DECLARATION

Homogenous material information according to IPC-1752 standard

Material Composition RV-3032-C7:

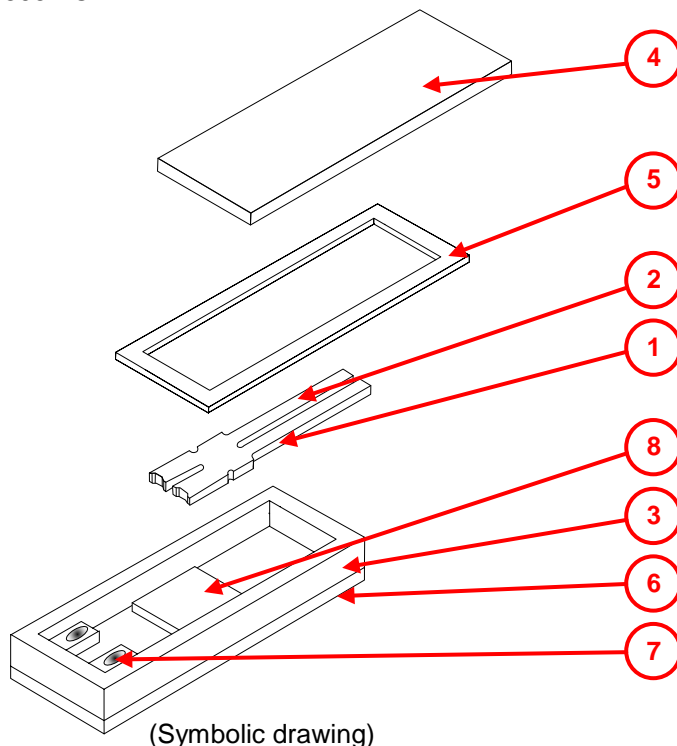

No.	Item Component Name	Sub Item Material Name	Material Weight		Substance Element	CAS Number	Comment
			(mg)	(%)			
1	Resonator	Quartz Crystal	0.13	100%	SiO ₂	14808-60-7	
2	Electrodes	Cr+Au	0.01	6%	Cr	Cr: 7440-47-3	
				94%	Au	Au: 7440-57-5	
3	Housing	Ceramic	6.90	100%	Al ₂ O ₃	1344-28-1	
4	Metal Lid	Kovar Lid	2.67	95%	Fe53Ni29Co18	Fe: 7439-89-6 Ni: 7440-02-0 Co: 7440-48-4	Metal Lid (Kovar)
				4.95%	Ni	Ni: 7440-02-0	Nickel plating
				0.05%	Au	Au: 7440-57-5	Gold plating
5	Seal	Solder Preform	0.54	80% 20%	Au80 / Sn20	Au: 7440-57-5 Sn: 7440-31-5	
6	Terminations	Internal and external terminals	0.38	80%	Mo	Mo: 7439-98-7	Molybdenum
				15%	Ni	Ni: 7440-02-0	Nickel plating
				5%	Au 0.5 micron	Au: 7440-57-5	Gold plating
7	Conductive adhesive	Silver filled Silicone glue	0.09	88%	Ag	Ag: 7440-22-4	di-Me, vinyl group-terminated Does not appear in finished product
				12%	Siloxanes and silicones	68083-19-2	
				0%	Distillates, petroleum hydrotreated	64742-47-8	
8	CMOS IC	Silicon Gold bumps	0.64	90%	Si	Si: 7440-21-3	
				10%	Au	Au: 7440-57-5	
Unit weight			11.4				

10.2. MATERIAL ANALYSIS & TEST RESULTS

Homogenous material information according to IPC-1752 standard

No.	Item Component Name	Sub Item Material Name	RoHS						Halogens				Phthalates			
			Pb	Cd	Hg	Cr(VI)	PBB	PBDE	F	Cl	Br	-	BBP	DBP	DEHP	DIBP
1	Resonator	Quartz Crystal	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
2	Electrodes	Cr+Au	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
3	Housing	Ceramic	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
4	Metal Lid	Kovar Lid & Plating	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
5	Seal	Solder Preform	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
6	Terminations	Int. & ext. terminals	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
7	Conductive adhesive	Silver filled Silicone glue	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
8	CMOS IC	Silicon & Gold bumps	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
	MDL [ppm]	Method Detection Limit	2			8	5	50				50				

nd (not detected) = below "Method Detection Limit" (MDL)

Test methods:

RoHS

- Pb, Cd
- Hg
- Cr(VI)
- PBB / PBDE

Test method with reference to:

- IEC 62321-5:2013
- IEC 62321-4:2013 + AMD1:2017
- IEC 62321-7-2:2017
- IEC 62321-6:2015

- MDL: 2 ppm
- MDL: 2 ppm
- MDL: 8 ppm
- MDL: 5 ppm

Halogens

Test method with reference to BS EN 14582:2016

MDL: 50 ppm

Phthalates

Test method with reference to IEC 62321-8:2017

MDL: 50 ppm

10.3. RECYCLING MATERIAL INFORMATION

Recycling material information according to IPC-1752 standard.

Element weight is accumulated and referenced to the unit weight of 11.4 mg.


Item Material Name	No.	Item Component Name	Material Weight		Substance Element	CAS Number	Comment
			(mg)	(%)			
Quartz Crystal	1	Resonator	0.13	1.14	SiO ₂	14808-60-7	
Chromium	2	Electrodes	0.0006	0.005	Cr	Cr: 7440-47-3	
Ceramic	3	Housing	6.90	60.74	Al ₂ O ₃	1344-28-1	
Gold	2 4 5 6 8	Electrodes Metal Lid Seal Terminations CMOS IC	0.53	4.63	Au	Au: 7440-57-5	
Tin	5	Seal	0.11	0.95	Sn	Sn: 7440-31-5	
Nickel	4 6	Metal Lid Terminations	0.19	1.67	Ni	Ni: 7440-02-0	
Molybdenum	6	Terminations	0.3	2.68	Mo	Mo: 7439-98-7	
Kovar	4	Metal Lid	2.53	22.33	Fe ₅₃ Ni ₂₉ Co ₁₈	Fe: 7439-89-6 Ni: 7440-02-0 Co: 7440-48-4	
Silver	7a	Conductive adhesive	0.079	0.7	Ag	Ag: 7440-22-4	
Siloxanes and silicones	7b	Conductive adhesive	0.011	0.10	Siloxanes and silicones	68083-19-2	di-Me, vinyl group-terminated
Distillates	7c	Conductive adhesive	0	0	Distillates	64742-47-8	hydrotreated petroleum, does not appear in finished products
Silicon	8	CMOS IC	0.58	5.07	Si	Si: 7440-21-3	
Unit weight (total)			11.4	100			

10.4. ENVIRONMENTAL PROPERTIES & ABSOLUTE MAXIMUM RATINGS


Package	Description
SON-8 ceramic package	Small Outline Non-leaded (SON), hermetically sealed ceramic package with metal lid

Parameter	Directive	Conditions	Value
Product weight (total)			11.4 mg
Storage temperature		Store as bare product	-55 to +125°C
Moisture sensitivity level (MSL)	IPC/JEDEC J-STD-020D		MSL1
FIT / MTBF			available on request

Terminal finish:

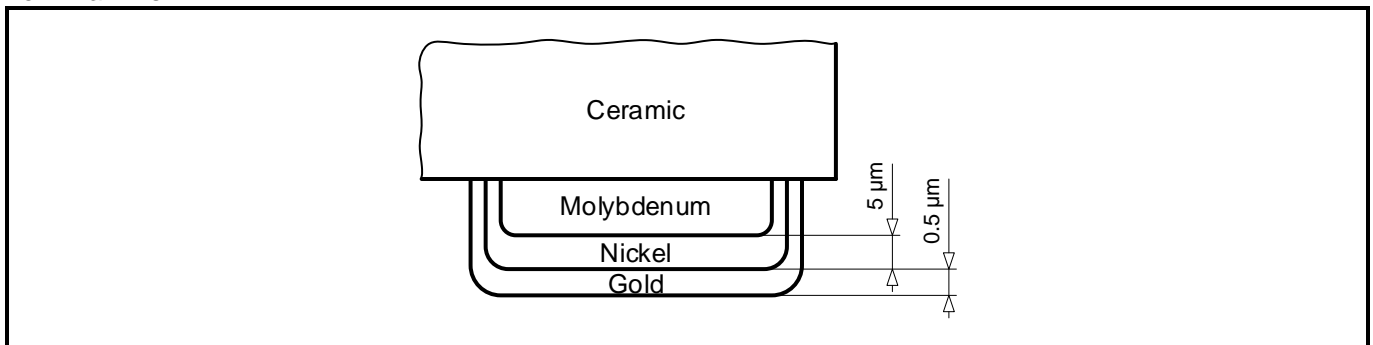

11. SOLDERING INFORMATION

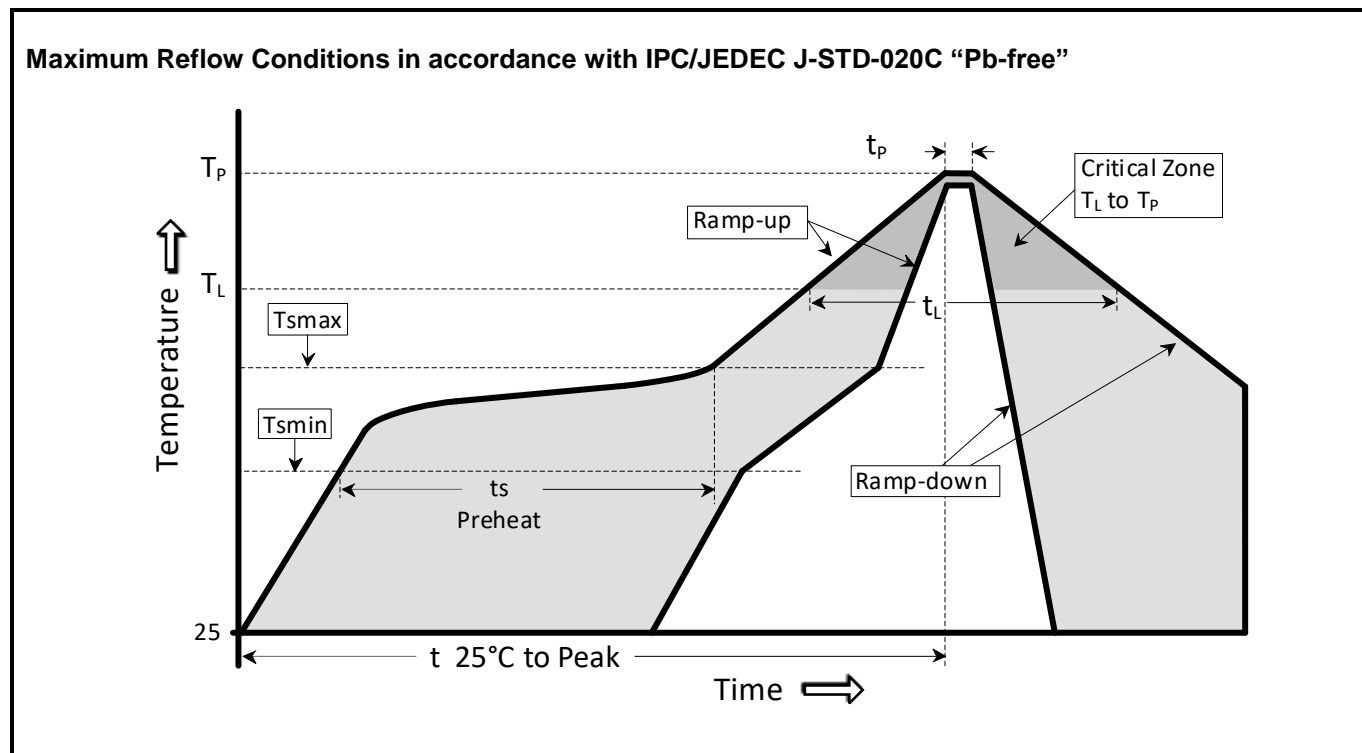

Temperature Profile	Symbol	Condition	Unit
Average ramp-up rate	($T_{S_{max}}$ to T_P)	3°C / second max	°C / s
Ramp down Rate	T_{cool}	6°C / second max	°C / s
Time 25°C to Peak Temperature	$T_{to-peak}$	8 minutes max	min
Preheat			
Temperature min	$T_{S_{min}}$	150	°C
Temperature max	$T_{S_{max}}$	200	°C
Time $T_{S_{min}}$ to $T_{S_{max}}$	t_s	60 – 180	sec
Soldering above liquidus			
Temperature liquidus	T_L	217	°C
Time above liquidus	t_L	60 – 150	sec
Peak temperature			
Peak Temperature	T_p	260	°C
Time within 5°C of peak temperature	t_p	20 – 40	sec

12. HANDLING PRECAUTIONS FOR MODULES WITH EMBEDDED CRYSTALS

The built-in tuning-fork crystal consists of pure Silicon Dioxide in crystalline form. The cavity inside the package is evacuated and hermetically sealed in order for the crystal blank to function undisturbed from air molecules, humidity and other influences.

Shock and vibration:

Keep the crystal / module from being exposed to **excessive mechanical shock and vibration**. Micro Crystal guarantees that the crystal / module will bear a mechanical shock of 5000 g / 0.3 ms.

The following special situations may generate either shock or vibration:

Multiple PCB panels - Usually at the end of the pick & place process the single PCBs are cut out with a router. These machines sometimes generate vibrations on the PCB that have a fundamental or harmonic frequency close to 32.768 kHz. This might cause breakage of crystal blanks due to resonance. Router speed should be adjusted to avoid resonant vibration.

Ultrasonic cleaning - Avoid cleaning processes using ultrasonic energy. These processes can damage the crystals due to the mechanical resonance frequencies of the crystal blank.

Overheating, rework high temperature exposure:

Avoid overheating the package. The package is sealed with a seal ring consisting of 80% Gold and 20% Tin. The eutectic melting temperature of this alloy is at 280°C. Heating the seal ring up to >280°C will cause melting of the metal seal which then, due to the vacuum, is sucked into the cavity forming an air duct. This happens when using hot-air-gun set at temperatures >280°C.

Use the following methods for rework:

- Use a hot-air-gun set at 270°C.
- Use 2 temperature controlled soldering irons, set at 270°C, with special-tips to contact all solder-joints from both sides of the package at the same time, remove part with tweezers when pad solder is liquid.

14. COMPLIANCE INFORMATION

Micro Crystal confirms that the standard product Real-Time Clock Module RV-3032-C7 is compliant with “EU RoHS Directive” and “EU REACH Directives”.

Please find the actual Certificate of Conformance for Environmental Regulations on our website:

[CoC Environment RV-Series.pdf](#)

15. DOCUMENT REVISION HISTORY

Date	Revision #	Revision Details
June 2020	1.0	First release
August 2020	1.1	Added Operating RV-3032-C7 With CeraCharge™ Backup Battery, 8.1.1.
November 2022	1.2	Clarified and corrected various specifications Adapted schemes, diagrams and application circuits Added extended temperature range specifications, +85°C to +105°C Adapted limit values and methods in accordance with the latest standards, 10.2. Added new disclaimer, 15.
May 2023	1.3	Corrected that EVI function is disabled in VBACKUP Power state, 1., 2.2., 2.3. 3.22., 4.2., 4.7., 4.11., 4.17., 8.1. and 8.4. Added that EVI pin should not be tied to V_{BACKUP} , 2.2. Adjusted TCM 3.0 V and 4.5 V values, 3.20.1, 4.3. and 7.2.

The information contained in this document is believed to be accurate and reliable. However, Micro Crystal assumes no responsibility for any consequences resulting from the use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. In accordance with our policy of continuous development and improvement, Micro Crystal reserves the right to modify specifications mentioned in this publication without prior notice and as deemed necessary.

Any use of Products for the manufacture of arms is prohibited. Customer shall impose that same obligation upon all third-party purchasers.

Without the express written approval of Micro Crystal, Products are not authorized for use as components in safety and life supporting systems as well as in any implantable medical devices. The unauthorized use of Products in such systems / applications / equipment is solely at the risk of the customer and such customer agrees to defend and hold Micro Crystal harmless from and against any and all claims, suits, damages, cost, and expenses resulting from any unauthorized use of Products.

No licenses to patents or other intellectual property rights of Micro Crystal are granted in connection with the sale of Micro Crystal products, neither expressly nor implicitly. In respect of the intended use of Micro Crystal products by customer, customer is solely responsible for observing existing patents and other intellectual property rights of third parties and for obtaining, as the case may be, the necessary licenses.



A COMPANY OF THE SWATCH GROUP

Micro Crystal AG
Muehlestrasse 14
CH-2540 Grenchen
Switzerland

Phone +41 32 655 82 82
sales@microcrystal.com
www.microcrystal.com